

OW1008



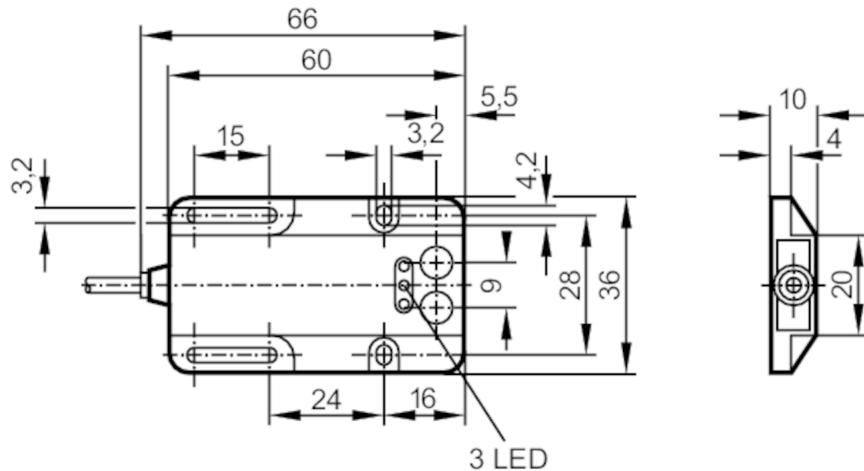
Through-beam sensor receiver

OWE-FPKG/6M

Article no longer available - archive entry

Alternative articles: OJ5009

When selecting an alternative article and accessories please note that technical data may differ!



Empfänger in unterer und oberer Optik

Product characteristics

Type of light		red light
Housing		rectangular

Application

Function principle		Through-beam sensor
--------------------	--	---------------------

Electrical data

Operating voltage	[V]	10..36 DC
Current consumption	[mA]	25; ((36 V))
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	660

Outputs

Electrical design		PNP
Output function		light-on/dark-on mode; (parameterisable)
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	200
Switching frequency DC	[Hz]	250
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes

Detection zone

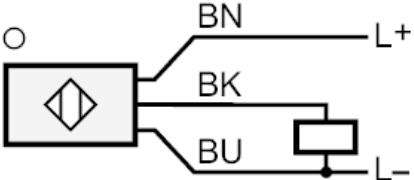
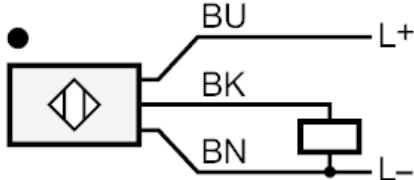
Transmitter / receiver		receiver
Range	[m]	< 4

OW1008



Through-beam sensor receiver

OWE-FPKG/6M

Operating conditions		
Ambient temperature	[°C]	-25...60
Protection		IP 67
Tests / approvals		
EMC	EN 60947-5-2	
	EN 55011	class B
Mechanical data		
Housing		rectangular
Dimensions	[mm]	36 x 60 x 10
Materials		ABS glass fibre reinforced
Lens material		PMMA
Displays / operating elements		
Display	switching status	1 x LED, yellow
	operation	1 x LED, green
	function	1 x LED, red
Remarks		
Pack quantity		1 pcs.
Electrical connection		
Cable: 6 m, PVC; 3 x 0.14 mm ²		
Connection		
 		
Core colours :		
BK =	black	
BN =	brown	
BU =	blue	

Diagrams and graphs

excess gain graph

