




Retro-reflective sensor

OAR-FCKG/T

Article no longer available - archive entry

Alternative articles: O4P500

When selecting an alternative article and accessories please note that technical data may differ!

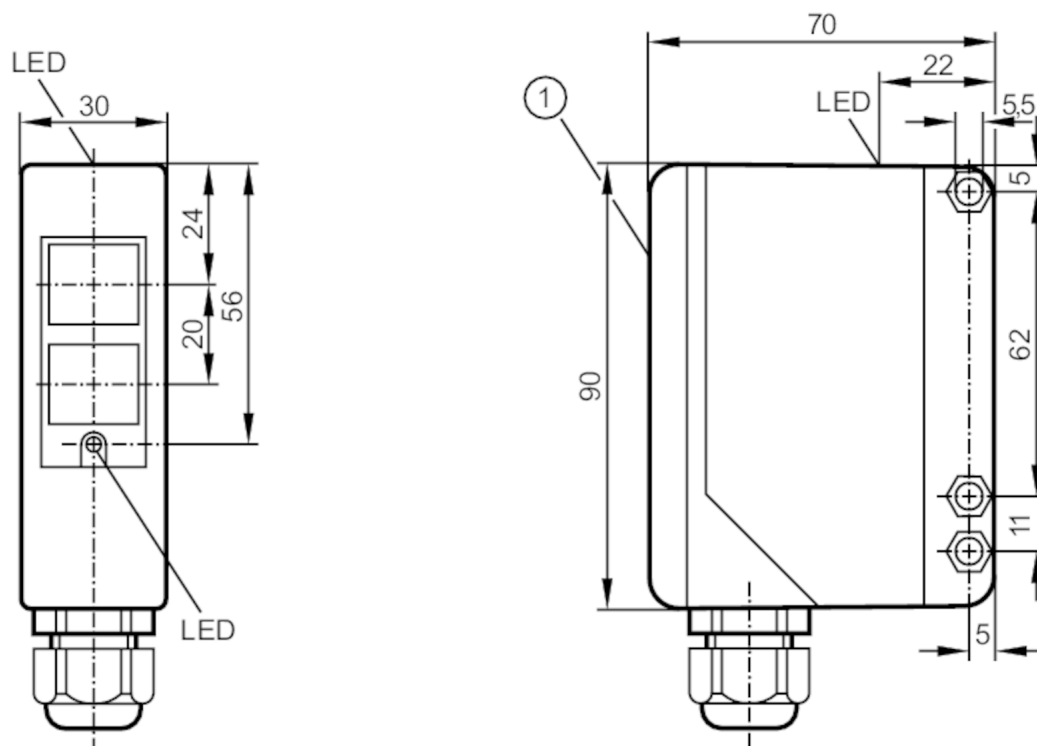

- 1 selection switch and potentiometer under cover
receiver in upper lens
transmitter in lower lens

Product characteristics

Type of light	infrared light
Housing	rectangular

Application

Special feature	Function check output
Function principle	Retro-reflective sensor

Electrical data

Operating voltage	[V]	10...36 DC
Current consumption	[mA]	< 50
Protection class		II
Reverse polarity protection		yes
Type of light		infrared light
Wave length	[nm]	880

Outputs

Electrical design	PNP/NPN
Output function	light-on/dark-on mode; (parameterisable)
Function check output	yes



Retro-reflective sensor

OAR-FCKG/T

Max. current load for function check output	[mA]	10
Permanent current rating of switching output DC	[mA]	250
Max. current load in dual output mode	[mA]	100
Switching frequency DC	[Hz]	300
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes
Time function	[s]	0.5...10

Detection zone		
Range	[m]	0.25...10; (Prismatic reflector Ø 80 E20005)
Range referred to prismatic reflector	[m]	0.25...10; (Prismatic reflector Ø 80 E20005)
Range adjustable		yes
Max. light spot diameter	[mm]	350
Light spot dimensions refer to		at maximum range

Operating conditions		
Ambient temperature	[°C]	-25...60
Protection		IP 65

Tests / approvals		
EMC	EN 60947-5-2	

Mechanical data		
Weight	[g]	0.285
Housing		rectangular
Dimensions	[mm]	90 x 30 x 70
Materials		PPO modified
Lens material		PMMA

Displays / operating elements		
Display	switching status	1 x LED, yellow
	operation	1 x LED, green
	function	1 x LED, red
Operating elements		on-delay or off-delay selectable via slide switch

Accessories		
Items supplied		Angle bracket: 1, E20514 screwdrivers

Remarks		
Pack quantity		1 pcs.


Retro-reflective sensor

OAR-FCKG/T

Electrical connection

terminals: ...1.5 mm²; Cable sheath: Ø 4.5...10 mm; Cable gland: M16 X 1.5

Connection

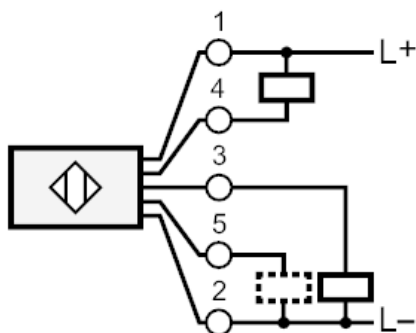

5 Function check output

Diagrams and graphs

excess gain graph

