




Incremental encoder with hollow shaft

RO-0360-I05/N6

Article no longer available - archive entry

Alternative articles: ROP521 + E11855

When selecting an alternative article and accessories please note that technical data may differ!

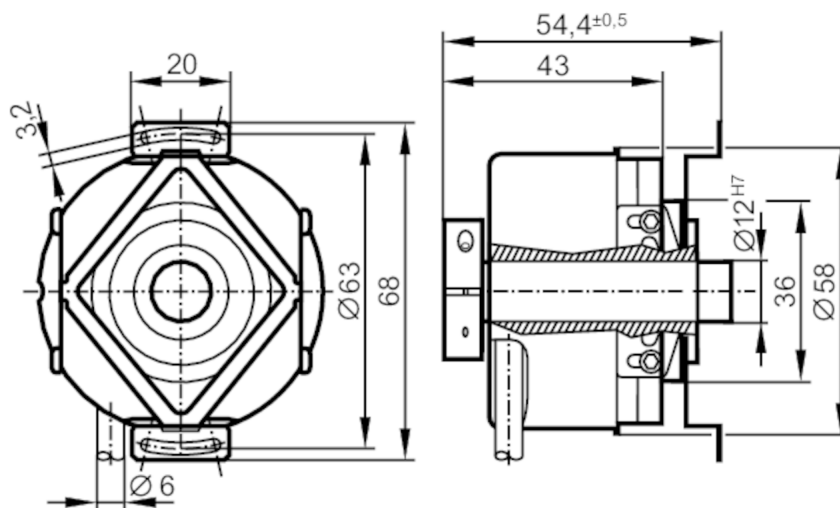

Product characteristics

Resolution	360 resolution
Shaft design	continuous hollow shaft
Shaft diameter [mm]	12

Application

Function principle	incremental
Detection system	photoelectric

Electrical data

Operating voltage tolerance [%]	10
Operating voltage [V]	5 DC
Current consumption [mA]	< 150

Outputs

Electrical design	TTL
Max. current load per output [mA]	20
Switching frequency [kHz]	300
Phase difference A and B [°]	90

Measuring/setting range

Resolution	360 resolution
------------	----------------

Operating conditions

Ambient temperature [°C]	-30...100
Max. relative air humidity [%]	98



Incremental encoder with hollow shaft

RO-0360-I05/N6

Protection	IP 64; (on the housing: IP 66; on the shaft: IP 64)
------------	---

Tests / approvals

Shock resistance	200 g
Vibration resistance	30 g

Mechanical data

Weight [g]	724.2
Dimensions [mm]	Ø 58 / L = 54.4
Materials	aluminium
Max. revolution, mechanical [U/min]	12000; (when using both shaft clamping rings)
Max. starting torque [Nm]	2.5
Reference temperature torque [°C]	20
Shaft design	continuous hollow shaft
Shaft diameter [mm]	12
Shaft fit	H7
Shaft material	stainless steel
Installation depth of shaft [mm]	10
Max. axial shaft misalignment [mm]	1; (max. radial shaft alignment: ± 0,05 mm)


Electrical connection

Cable: 6 m, PUR; radial, can also be used axially

brown	A
green	A inverted
grey	B
pink	B inverted
red	0 index
black	0 index inverted
blue	L+ sensor
white	0V sensor
brown/green	L+ (Up)
white/green	0V (Un)
lilac	failure inverted
screen	housing

Diagrams and graphs

Pulse diagram



direction of rotation clockwise (looking at the shaft)