


IG5682



Inductive sensor

IGB2005-ARKG/JP/PUR RT

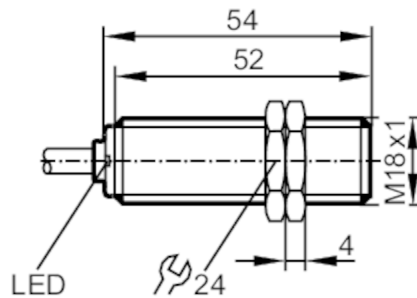

Electrical data

Operating voltage [V]	10...55 DC
Protection class	II
Reverse polarity protection	yes

Outputs

Electrical design	PNP/NPN
Output function	normally open
Max. voltage drop switching output DC [V]	4.6
Minimum load current [mA]	2
Max. leakage current [mA]	0.6
Permanent current rating of switching output DC [mA]	400
Switching frequency DC [Hz]	700
Short-circuit protection	yes
Type of short-circuit protection	pulsed
Overload protection	yes

Detection zone

Sensing range [mm]	5
Real sensing range S_r [mm]	$5 \pm 10\%$
Operating distance [mm]	0...4.05

Accuracy / deviations

Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3
Hysteresis [% of S_r]	1...15
Switch point drift [% of S_r]	-10...10

Operating conditions

Ambient temperature [°C]	-25...80
Protection	IP 67

IG5682



Inductive sensor

IGB2005-ARKG/JP/PUR RT

Tests / approvals

EMC	EN 60947-5-2	
	EN 55011	class B
MTTF [years]		1502

Mechanical data

Weight [g]	110.2
Housing	threaded type
Mounting	flush mountable
Dimensions [mm]	M18 x 1 / L = 54
Thread designation	M18 x 1
Materials	brass nickel-plated; PBT

Displays / operating elements

Display	switching status	1 x LED, red
---------	------------------	--------------

Accessories

Accessories (supplied)	lock nuts: 2
------------------------	--------------


Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 2 m, PUR; 2 x 0.5 mm²

Connection

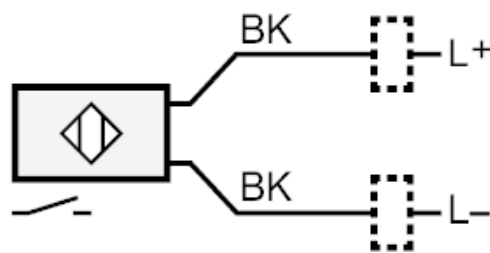

Core colours :

BK = black