


II5101

Inductive sensor

IIA2010SFROG/V4A



Article no longer available - archive entry

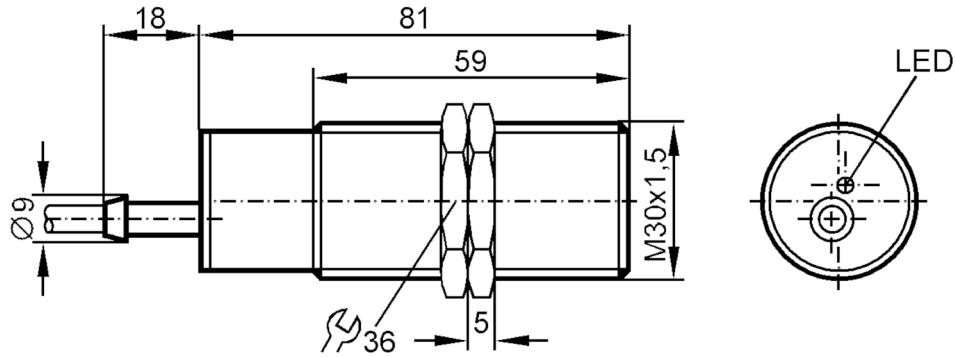

Electrical data

Connection to switching amplifiers	yes
Switching amplifiers	connection to F400 control monitor or as 2-wire DC DNP
Operating voltage [V]	10...36 DC
Reverse polarity protection	no

Outputs

Electrical design	PNP; (self-monitoring system)
Output function	normally open / normally closed; (selectable)
Max. voltage drop switching output DC [V]	6.5
Minimum load current [mA]	5
Max. leakage current [mA]	1.5
Permanent current rating of switching output DC [mA]	100
Switching frequency DC [Hz]	30
Short-circuit protection	no
Overload protection	no

Detection zone

Sensing range [mm]	10
Real sensing range S_r [mm]	$10 \pm 10 \%$
Operating distance [mm]	0...8.1

II5101



Inductive sensor

IIA2010SFROG/V4A

Accuracy / deviations		
Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.3 / copper: 0.2	
Hysteresis [% of Sr]	1...15	
Switch point drift [% of Sr]	-10...10	
Operating conditions		
Ambient temperature [°C]	-25...80	
Protection	IP 67	
Tests / approvals		
EMC	IEC 801-2	level 4
	IEC 801-3	level 3
	IEC 801-4	level 4
	IEC 801-5	level 2
Mechanical data		
Housing	threaded type	
Mounting	flush mountable	
Dimensions [mm]	M30 x 1.5	
Thread designation	M30 x 1.5	
Materials	stainless steel (1.4571/316Ti); PBT	
Displays / operating elements		
Display	switching status	1 x LED, yellow
Accessories		
Accessories (supplied)	lock nuts: 2	
Remarks		
Pack quantity	1 pcs.	

II5101






Inductive sensor

IIA2010SFROG/V4A

Electrical connection

Cable: 2 m, PVC; 3 x 0.5 mm²

Connection

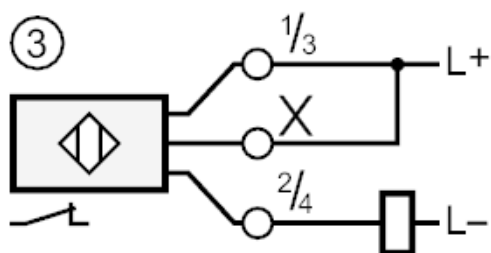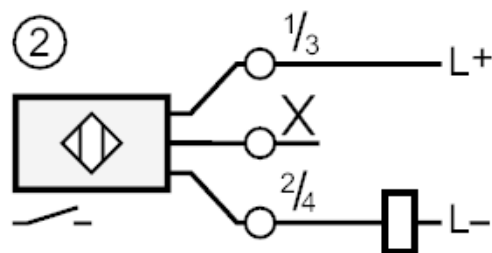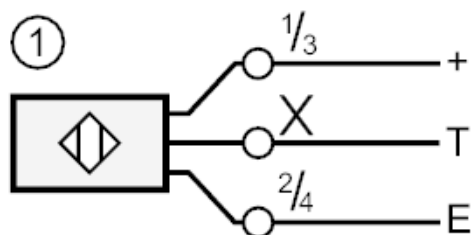

- 1 = connection to F400
2 = Connection 2-wire DC
3 = Connection 2-wire DC

Core colours :

- BK = black
BN = brown
BU = blue

Article no longer available - archive entry