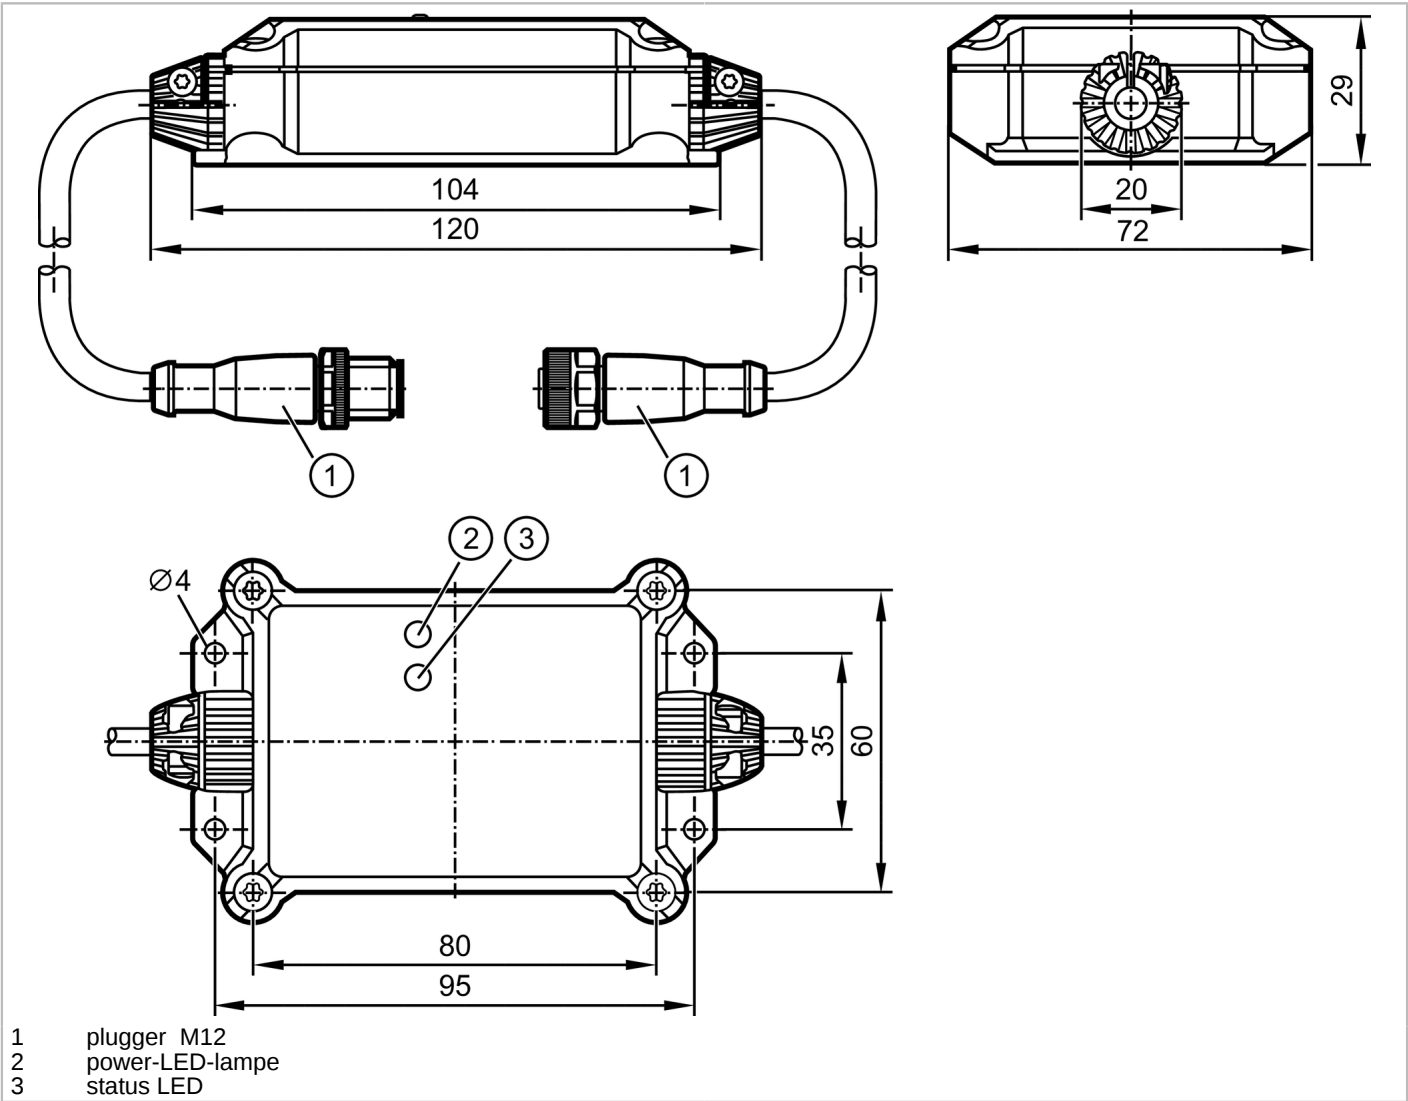




ISOBUS-gateway

ISOBUS Gateway/VT





Elektriske data		
Driftsspenning	[V]	12,00...27,00 DC
Strømforbruk	[mA]	11,00...48,00
Grensesnitt		
Grensesnitt for kommunikasjon		CAN
Antall CAN-grensesnitt		2
CAN		
Overføringshastighet		250 (125...1000) kBaud
Grensesnitt		CAN Interface 2.0 A/B ISO 11898
Avsluttende motstand		ja; (intern ; 120 Ohm; kan ikke deaktiveres)
ISOBUS		
Overføringshastighet		250 kBaud
Grensesnitt		CAN Interface ISO 11783
Avsluttende motstand		nei



ISOBUS-gateway

ISOBUS Gateway/VT

Driftsforhold		
Omgivelsestemperatur	[°C]	-40,00...80,00
Beskyttelse		IP 67
Mekaniske data		
Vekt	[g]	190,10
Type montering		panel/overflate
Dimensjoner	[mm]	72,00 x 104,00 x 29,00
Materialer		hus: PA 12 svart
Displayer/driftselementer		
Display	Status	1 x LED, grønn/rød
	forsyningsspenningen	1 x LED, grønn/rød
Maskinvare		
Proseszor		ARM Cortex M4 32 bit
Programlager		1,5 MB Flash
Aktivt minne		RAM: 320 kB FRAM: 16 kB
Merknader		
Antall i forpakning		1,00 stk.
Elektrisk tilkobling - CAN		
Koblinger: 1 x M12; koding: A		
		
1	n.c.	
2	n.c.	
3	n.c.	
4	CAN_H	
5	CAN_L	
Elektrisk tilkobling - ISOBUS		
Koblinger: 1 x M12; koding: A		
		
1	n.c.	
2	VBB	
3	GND	
4	CAN_H	
5	CAN_L	