


Inductive sensor

IOW2010-ARKG/UP/US-100 RT

Article no longer available - archive entry

Alternative articles: IO5016

When selecting an alternative article and accessories please note that technical data may differ!

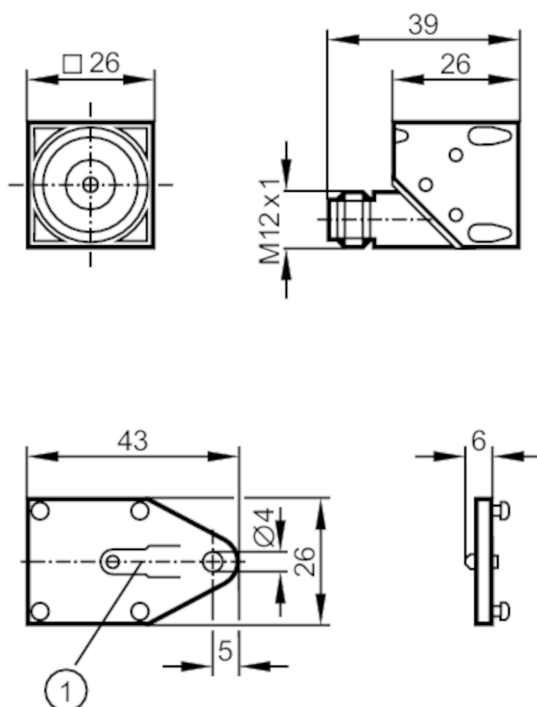

1 snap-fit mounting



Product characteristics

Electrical design	PNP/NPN
Output function	normally open
Sensing range [mm]	10
Housing	rectangular
Dimensions [mm]	26 x 26 x 39

Electrical data

Operating voltage [V]	10...36 DC
Protection class	II
Reverse polarity protection	yes

Outputs

Electrical design	PNP/NPN
Output function	normally open
Max. voltage drop switching output DC [V]	4.5
Minimum load current [mA]	2
Max. leakage current [mA]	0.6
Permanent current rating of switching output DC [mA]	100



Inductive sensor

IOW2010-ARKG/UP/US-100 RT

Switching frequency DC	[Hz]	250
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes

Detection zone

Sensing range	[mm]	10
Real sensing range Sr	[mm]	10 ± 10 %
Operating distance	[mm]	0...8.1

Accuracy / deviations

Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.3 / copper: 0.2
Hysteresis	[% of Sr]	1...15
Switch point drift	[% of Sr]	-10...10

Operating conditions

Ambient temperature	[°C]	-25...70
Protection		IP 67

Tests / approvals

EMC	EN 60947-5-2	
	EN 55011	class B

Mechanical data

Housing		rectangular
Mounting		flush mountable
Dimensions	[mm]	26 x 26 x 39
Materials		PA

Displays / operating elements

Display	switching status	1 x LED, red
---------	------------------	--------------

Accessories

Items supplied		head cap screw: 1 x M4 x 10
----------------	--	-----------------------------

Remarks

Pack quantity		1 pcs.
---------------	--	--------

Electrical connection - plug

Connector: 1 x M12; coding: A



IO9921



Inductive sensor

IOW2010-ARKG/UP/US-100 RT

Connection

