

LR0000B-BR34AQPKG/US



Continuous level sensor (guided wave radar)

LR0000B-BR34AQPKG/US

| | | |
|---|--------|---|
| Process temperature | [°C] | -25...80; (90 < 1 h ; see note under remarks) |
| Pressure rating | [bar] | 16 |
| Vacuum resistance | [mbar] | -1000 |
| MAWP (for applications according to CRN) | [bar] | 16 |
| Electrical data | | |
| Operating voltage | [V] | 18...30 DC |
| Current consumption | [mA] | < 30 |
| Protection class | | III |
| Reverse polarity protection | | yes |
| Power-on delay time | [s] | < 3 |
| Measuring principle | | guided wave radar |
| Inputs / outputs | | |
| Number of inputs and outputs | | Number of digital outputs: 2 |
| Outputs | | |
| Total number of outputs | | 2 |
| Output signal | | switching signal; IO-Link |
| Electrical design | | PNP |
| Number of digital outputs | | 2 |
| Output function | | normally open / normally closed; (parameterisable) |
| Max. voltage drop switching output DC | [V] | 2.5 |
| Permanent current rating of switching output DC | [mA] | 200 |
| Short-circuit protection | | yes |
| Type of short-circuit protection | | thermal, pulsed |
| Overload protection | | yes |
| Measuring/setting range | | |
| Probe length L | [mm] | 100...1600 |
| Active range A | [mm] | L-40; (when set to oil and oil based media: L-60) |
| Inactive range I1 / I2 | [mm] | 30 / 10; (when set to oil and oil based media: 30 / 30) |
| Sampling rate | [Hz] | 4 |
| Setting range | | |
| Set point SP | [mm] | 15...L-30 |
| Note on setpoint SP | | when set to oil and oil based media: 35...L-30 |
| Reset point rP | [mm] | 10... L-35 |
| Note on reset point rP | | when set to oil and oil based media: 30...L-35 |
| In steps of | [mm] | 5 |
| Hysteresis | [mm] | > 5 |
| Accuracy / deviations | | |
| Repeatability | [mm] | ± 5 |
| Measuring error | [mm] | ± 7 |
| Offset error | [mm] | 5 |
| Resolution | [mm] | 1 |

LR7000



Continuous level sensor (guided wave radar)

LR0000B-BR34AQPKG/US

| | | | |
|-------------------------------|---|-------------------------------|--|
| Temperature drift per 10 K | | ± 0.2 % | |
| Interfaces | | | |
| Communication interface | | IO-Link | |
| Transmission type | | COM2 (38,4 kBaud) | |
| IO-Link revision | | 1.1 | |
| SDCI standard | | IEC 61131-9 CDV | |
| Profiles | | no profile | |
| SIO mode | | yes | |
| Required master port type | | A | |
| Process data analogue | | 1 | |
| Process data binary | | 2 | |
| Min. process cycle time [ms] | | 2.3 | |
| Supported DeviceIDs | | Type of operation | DeviceID |
| | | default | 8 |
| Operating conditions | | | |
| Ambient temperature [°C] | | -25...60 | |
| Storage temperature [°C] | | -40...85 | |
| Protection | | IP 67 | |
| Tests / approvals | | | |
| EMC | DIN EN 61000-6-2 | | |
| | DIN EN 61000-6-3 | | in a closed metal tank |
| | DIN EN 61000-6-4 | | in plastic or open metal tanks |
| Shock resistance | DIN EN 60068-2-27 | | 50 g (11 ms) / 25 g (6 ms) with reference rod 0.5 m |
| Vibration resistance | DIN EN 60068-2-6 | | 5 g (10...2000 Hz) / 1 g (5...200 Hz) with reference rod 0.5 m |
| MTTF [years] | 233 | | |
| UL approval | UL Approval no. | | H007 |
| | File number UL | | E174191 |
| Mechanical data | | | |
| Weight [g] | 381.7 | | |
| Materials | stainless steel (304/1.4301); stainless steel (316L/1.4404); FKM; PBT; PC; PEI; TPE-V | | |
| Materials (wetted parts) | stainless steel (303/1.4305); probe connection: stainless steel (316L/1.4435); PTFE; FKM; Sealing: NBR reinforced fibre | | |
| Process connection | threaded connection G 3/4 external thread | | |
| Displays / operating elements | | | |
| Display | Display unit | 3 x LED, green | |
| | switching status | 2 x LED, yellow | |
| | level | alphanumeric display, 4-digit | |
| | parameter setting | alphanumeric display, 4-digit | |
| Remarks | | | |
| Notes | Please see the technical note under "Downloads"; For high process temperatures: The temperature at the process connection is decisive. The actual medium temperature may be higher. | | |
| Pack quantity | 1 pcs. | | |

LR7000



Continuous level sensor (guided wave radar)


LR0000B-BR34AQPKG/US

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



Connection

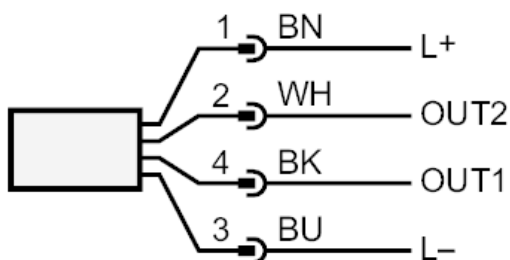

OUT1: switching output or IO-Link
OUT2: switching output
colours to DIN EN 60947-5-2

Core colours :

BK = black
BN = brown
BU = blue
WH = white

LR7000



Continuous level sensor (guided wave radar)

LR0000B-BR34AQPKG/US

Diagrams and graphs

Measurement deviation D at the limits of the active rod range

