


Through-beam sensor receiver

OTE-FPKG/US-100-IPF



receiver in lower lens

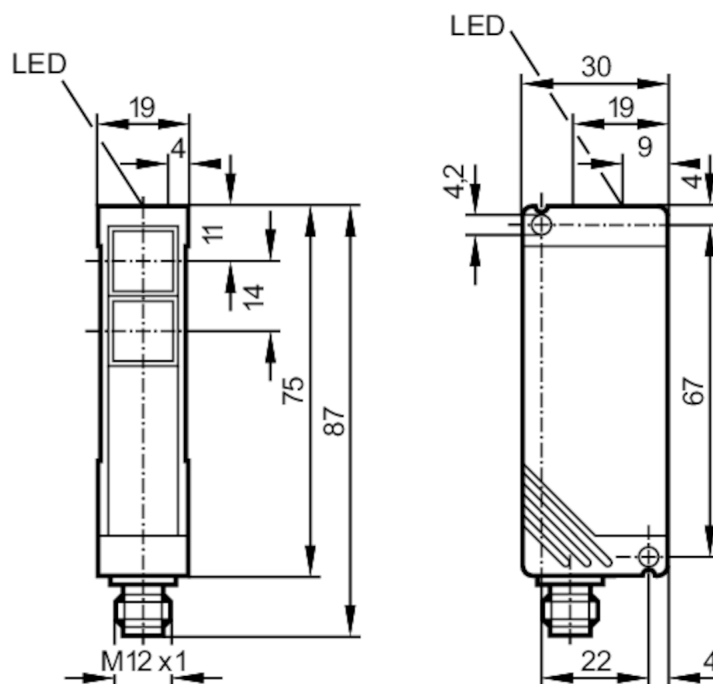

Product characteristics

Type of light	infrared light
Housing	rectangular

Application

Function principle	Through-beam sensor
--------------------	---------------------

Electrical data

Operating voltage	[V]	10...50 DC
Current consumption	[mA]	30; ((24 V))
Protection class		II
Reverse polarity protection		yes
Type of light		infrared light
Wave length	[nm]	880

Outputs

Electrical design		PNP
Output function		light-on/dark-on mode; (programmable)
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	250
Switching frequency DC	[Hz]	150
Short-circuit protection		yes
Type of short-circuit protection		pulsed

OT5009



Through-beam sensor receiver

OTE-FPKG/US-100-IPF

Overload protection	yes
---------------------	-----

Detection zone

Transmitter / receiver	receiver
Range [m]	< 10
Range adjustable	yes

Operating conditions

Ambient temperature [°C]	-25...60
Protection	IP 65

Tests / approvals

EMC	EN 60947-5-2	
	EN 55011	class B
MTTF [years]	573	

Mechanical data

Weight [g]	161
Housing	rectangular
Materials	PBT
Lens material	PMMA
Lens alignment	side lens

Displays / operating elements

Display	switching status	1 x LED, yellow
	operation	1 x LED, green

Accessories

Items supplied	Angle bracket: 1, E20461
	screwdrivers

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection



Connector: 1 x M12; coding: A



Through-beam sensor receiver

OTE-FPKG/US-100-IPF

Connection

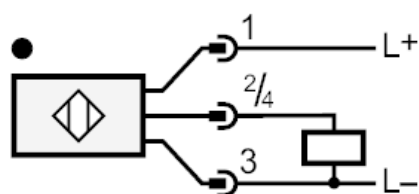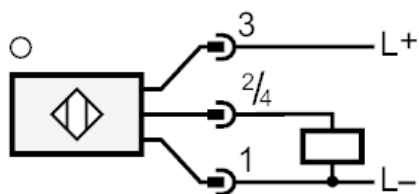

Diagrams and graphs

excess gain graph

