


AC2638



I/O module for field applications

FieldModuleDP 4AI (V) M12

phase-out article

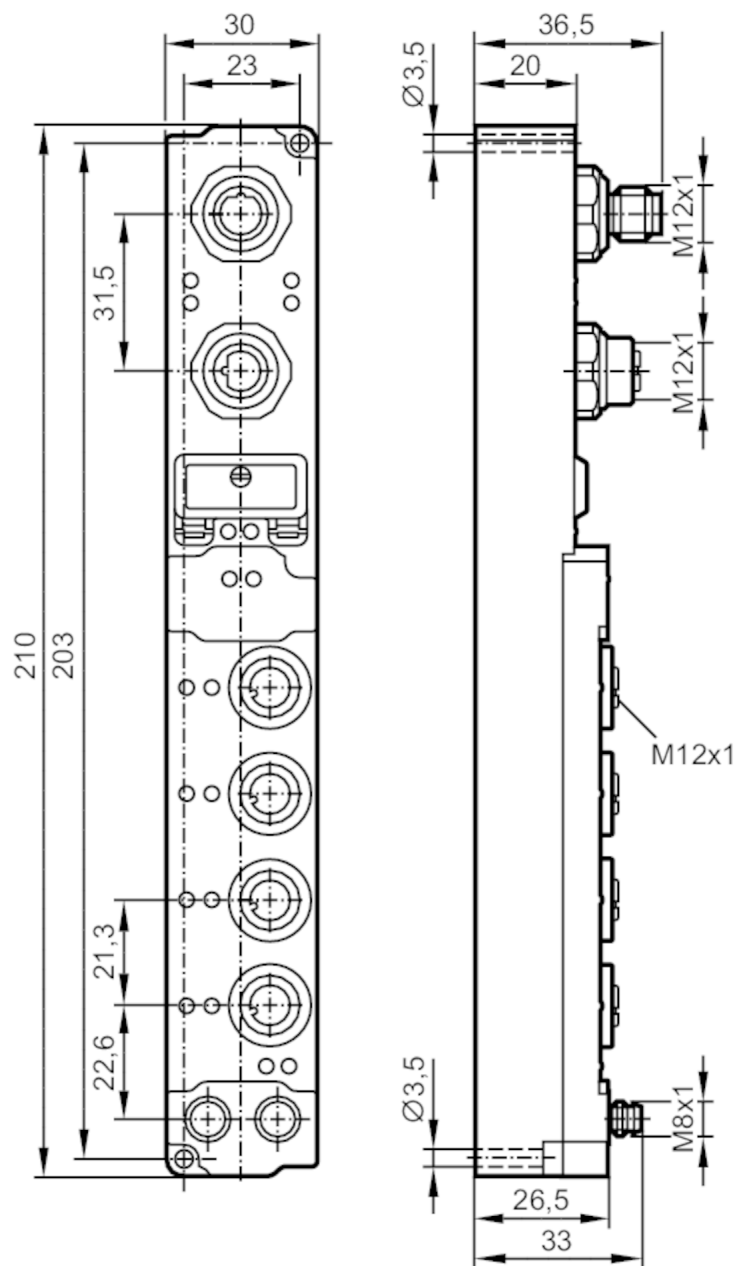

Electrical data

Operating voltage	[V]	20...29 DC
Current consumption	[mA]	< 140
Electrical separation		no

Inputs / outputs

Number of inputs and outputs	Number of analogue inputs: 4
------------------------------	------------------------------

Inputs

Sensor supply of the inputs	from load voltage
-----------------------------	-------------------



I/O module for field applications

FieldModuleDP 4AI (V) M12

Number of analogue inputs	4
Analogue input (voltage) [V]	10...0

Accuracy / deviations

Measuring error [X16]	< ± 0,3
-----------------------	---------

Interfaces

PROFIBUS

Transmission rate	9,6...12000 kBit/s
-------------------	--------------------

Operating conditions

Ambient temperature [°C]	0...55
Storage temperature [°C]	-25...85
Protection	IP 67

Tests / approvals

EMC	EN 50081-2	
	EN 50082-2	
Vibration resistance	IEC 68	parts 2-6 / IEC 68, parts 2-27

Mechanical data


Weight [g]	300
Materials	housing: PA 6; potting compound: PU; contact pins: brass gold-plated

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - PROFIBUS

Connector: M12; coding: B



	plug M12 PROFIBUS In
1	not used
2	wire A
3	GND
4	wire B
5	Screen
	socket M12 PROFIBUS Out
1	5 V DC
2	wire A
3	GND
4	wire B
5	Screen




I/O module for field applications


FieldModuleDP 4AI (V) M12

Electrical connection - Process connection

Connector: M12; coding: A



Connection

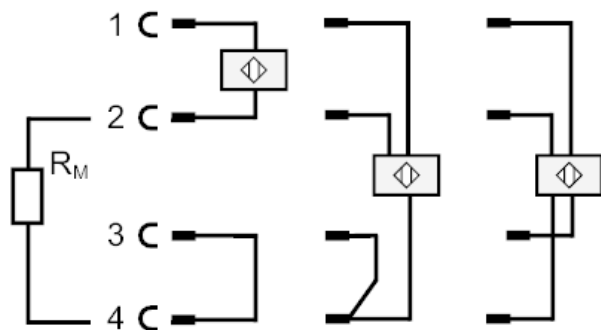

	socket M12 Inputs
1	Sensor supply UL
2	input +
3	GND
4	input -
5	Screen

Electrical connection - подача напряги

Connector: M8; coding: A



	plug M8
1	24 V DC UB
2	24 V DC UL
3	GND
4	GND
	socket M8
1	24 V DC UB
2	24 V DC UL
3	GND
4	GND