




AS-Interface control cabinet module

SmartL25 4DI 4DO R C

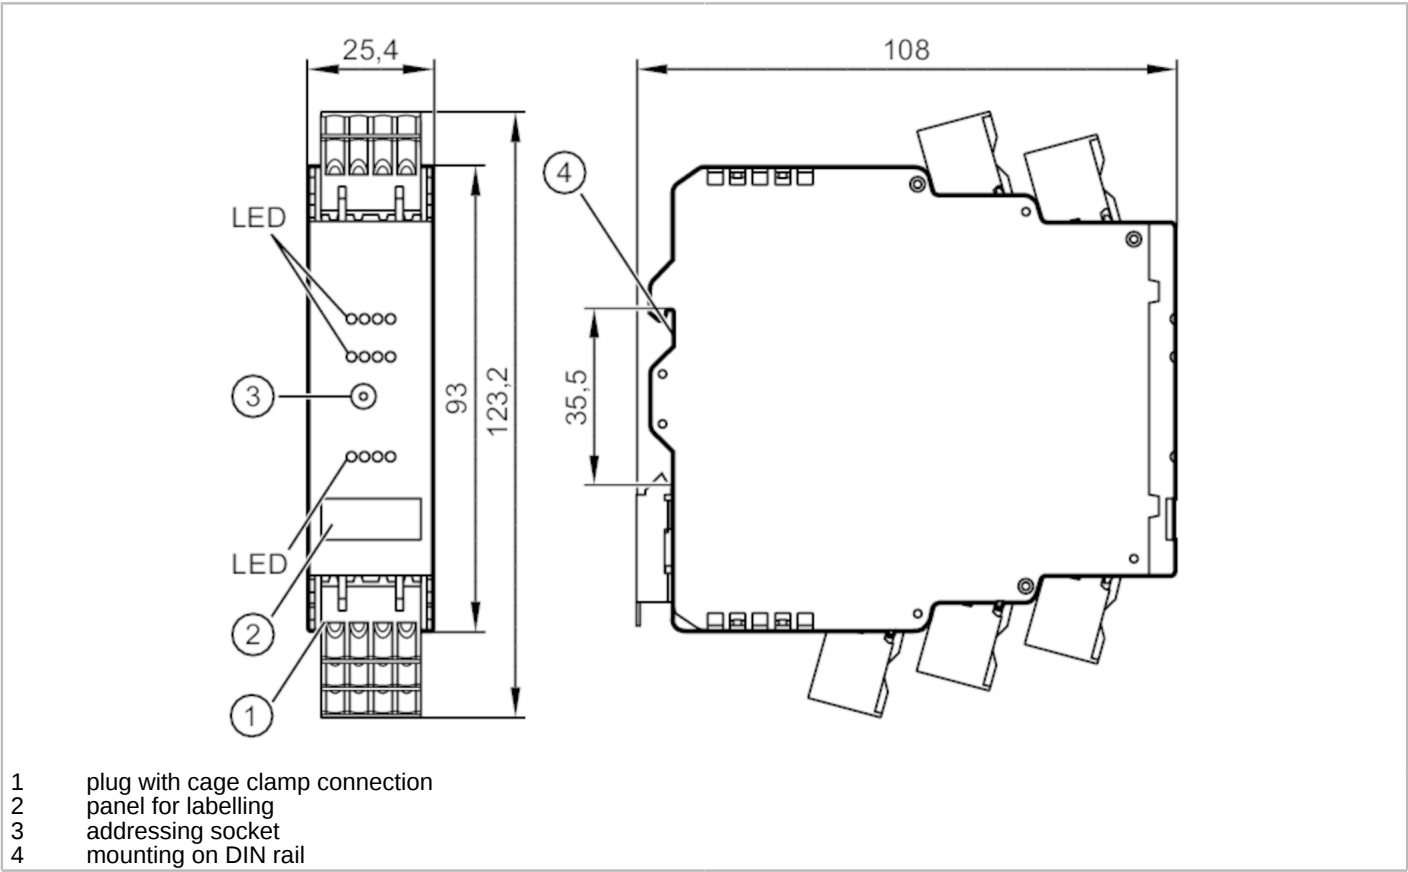

Application	
Design	only for operation with AS-i masters with the profile M4
Application	Встановлення до шафи керування
Electrical data	
Operating voltage [V]	26.5...31.6 DC
Max. current consumption from AS-i [mA]	300
Integrated watchdog	yes
Inputs / outputs	
Number of inputs and outputs	Number of digital inputs: 4; Number of relay outputs: 4
Inputs	
Number of digital inputs	4
Input circuit of digital inputs	PNP; (type 2 according to IEC 61131-2)
Sensor supply of the inputs	AS-i
Подача напруги [V]	18...30; (DC)
Max. total current rating of inputs [mA]	200
Input current High [mA]	6...10
Input current Low [mA]	0...2
Switching level high [V]	> 11



AS-Interface control cabinet module

SmartL25 4DI 4DO R C

Digital inputs protected against short circuits	yes					
Outputs						
Voltage range DC	[V]	24; (The outputs O1 + O3 and O2 + O4 must be supplied in pairs with the same voltage. 2 x 24 V DC)				
Voltage range AC	[V]	10...240; (The outputs O1 + O3 and O2 + O4 must be supplied in pairs with the same voltage. 2 x 240 V AC)				
Max. current load per output	[mA]	6000; (ohmic resistance)				
Max. current load outputs total	[A]	24; (ohmic resistance)				
Overall current rating for outputs (UL)	[A]	6; (ohmic resistance)				
Number of relay outputs		4				
Short-circuit proof		no				
Electrically separated		yes				
Operating conditions						
Ambient temperature	[°C]	-25...65				
Note on ambient temperature		the derating of the current load indicated in the operating instructions is to be taken into account at the following ambient temperature: > 55 °C				
Storage temperature	[°C]	-25...75				
Max. relative air humidity	[%]	90; (non condensing)				
Max. height above sea level	[m]	2000				
Protection		IP 20				
Protection rating terminals		IP 20				
Pollution degree		2				
Tests / approvals						
EMC		EN 62026-2				
		EN 61000-6-2				
		EN 61000-6-3				
MTTF	[ANN]	295				
AS-i classification						
AS-i version		3.0				
AS-i addressing		addressing socket				
Розширений режим адресації		yes				
AS-i master profile		M4				
AS-i profile		S-7.A.7				
AS-i I/O configuration	[hex]	7				
AS-i ID code	[hex]	A.7				
AS-i ID1 code	[hex]	7; (fixed)				
AS-i certificate		124301				
Assignment of the data bits		data bit	D0	D1	D2	D3
		input	I-1	I-2	I-3	I-4
		Output	O-1	O-2	O-3	O-4
Mechanical data						
Weight	[g]	216.05				

AC3220



AS-Interface control cabinet module

SmartL25 4DI 4DO R C

Type of mounting	mounting on DIN rail	
Materials	plastics; PC-GF20	
Displays / operating elements		
Display	switching status	LED, yellow I1...I4, O1...O4
	operation	LED, green AS-i
	errors	LED, red
Аксессуары		
Items supplied	cage clamps	
Remarks		
Remarks	Do not connect any of the following points to an external potential:	
	I-, I+, I1, I2, I3, I4	
	The connections are electrically connected with the AS-i cable.	
Pack quantity	1 pcs.	


AS-Interface control cabinet module

SmartL25 4DI 4DO R C

Electrical connection

pin headers: 4 x ; Spacing: 5.0 mm

Connection

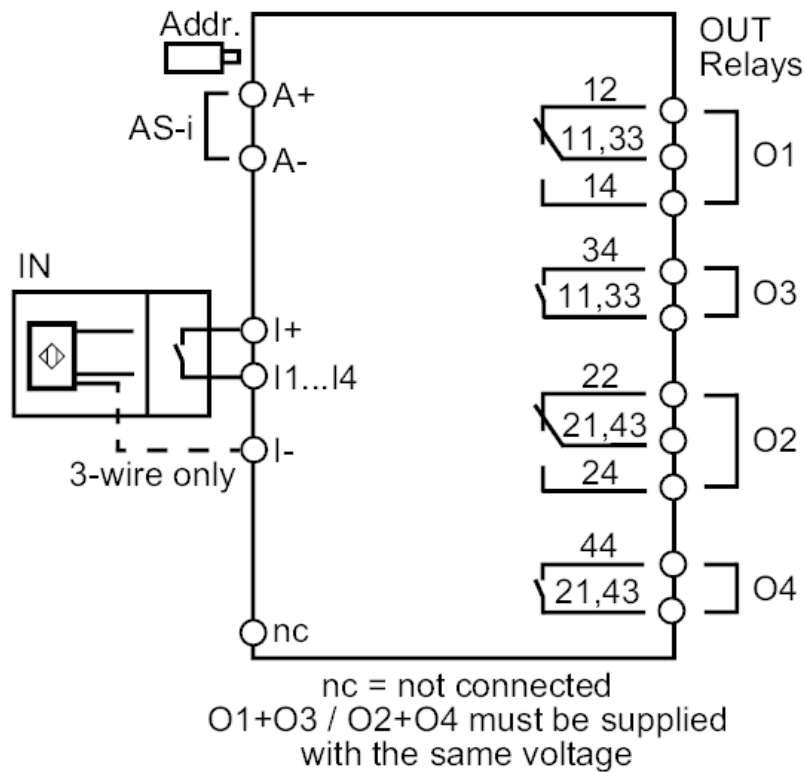

A+	AS-i +
A-	AS-i -
I+	Sensor supply +24V
I-	Sensor supply 0V
I1...I4	switching input sensor 1...4
O1...O4	switching output relay 1...4
11	relay O1 changeover contact, common
12	relay O1 changeover contact, normally closed contact
14	relay O1 changeover contact, normally open
21	relay O2 changeover contact, common
22	relay O2 changeover contact, normally closed contact
24	relay O2 changeover contact, normally open
33, 34	relay O3 normally open
43, 44	relay O4 normally open
nc	not used