




IO-Link master with AS-i interface

IO-Link Master AS-i 4P IP67

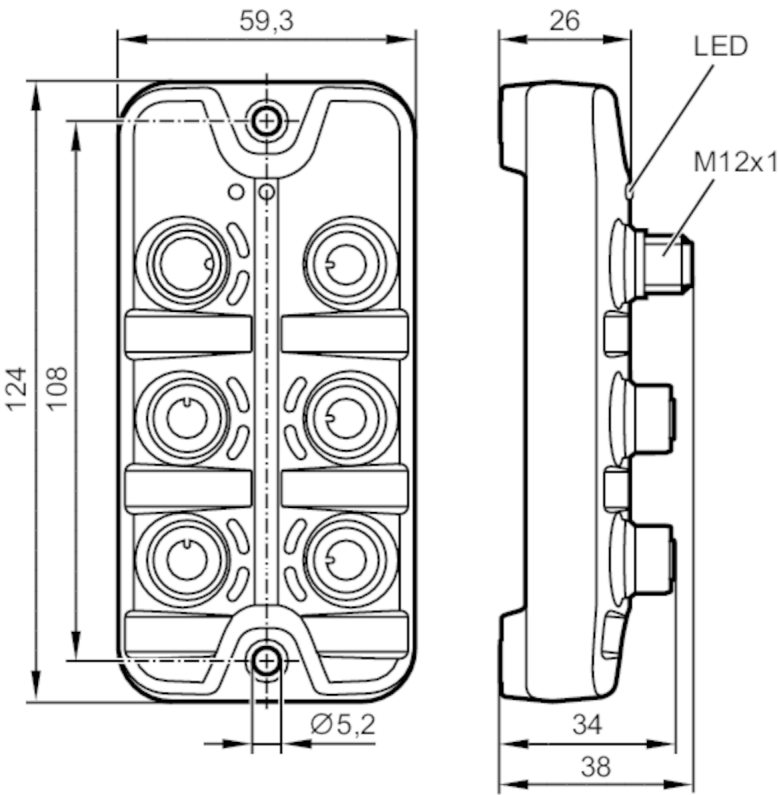

Application		
Application		field installation
Daisy-chain function		подача напруги; fieldbus interface
Electrical data		
Operating voltage	[V]	18...31.6 DC; (AS-i)
Current consumption	[mA]	300...1500; (AUX)
Max. current consumption from AS-i	[mA]	100
Protection class		III
Max. current load total	[A]	1.1; (ports 1+2: 0,55 (AUX); ports 3+4: 0,55 (AUX))
Additional voltage supply	[V]	20...30 DC; (AUX)
Inputs / outputs		
Total number of inputs and outputs		8; (configurable)
Number of inputs and outputs		Number of digital inputs: 8; Number of digital outputs: 4
Inputs		
Number of digital inputs		8; (IO-Link Port Class A: 4 x 2)
Sensor supply of the inputs		AUX
Switching level high	[V]	11...30
Switching level low	[V]	0...5



IO-Link master with AS-i interface

IO-Link Master AS-i 4P IP67

Digital inputs protected against short circuits	yes
Outputs	
Number of digital outputs	4; (IO-Link Port Class A: 4 x 1)
Max. current load per output [mA]	300
Short-circuit proof	yes
Actuator supply outputs	AUX
Interfaces	
Communication interface	IO-Link; AS-i
IO-Link Master	
Transmission type	COM1 (4,8 kBaud); COM2 (38,4 kBaud); COM3 (230,4 kBaud)
IO-Link revision	1.1
Number of ports class A	4
Operating conditions	
Ambient temperature [°C]	-25...60
Storage temperature [°C]	-25...85
Max. relative air humidity [%]	90
Protection	IP 65; IP 66; IP 67
Protection rating (NEMA 250)	6P
Pollution degree	2
Chemical media	ISO 16750-5 NEMA 250 5.13.1
	AA, BA, BD, HLP, CC, DB, DC, DD, CA AA
Tests / approvals	
EMC	EN 61000-6-2 EN 61000-6-4
Shock resistance	DIN EN 60068-2-27
Vibration resistance	DIN EN 60068-2-64 2009-04 DIN EN 60068-2-6 2008-10
MTTF [ANN]	161
AS-i classification	
AS-i version	2.11; 3.0
Розширений режим адресації	no
AS-i profile	основний ведений (СТТ1 вхід) S-7.4.E додатковий ведений (СТТ1 вхід) S-7.3.E додатковий ведений (СТТ1 вихід) S-7.3.2
Number of AS-i devices	1...5
Mechanical data	
Weight [g]	247
Materials	housing: PA orange; socket: brass nickel-plated
Electrical connection	
Module connection	M12
Remarks	
Remarks	For further information please see the operating instructions.
Pack quantity	1 pcs.



IO-Link master with AS-i interface

IO-Link Master AS-i 4P IP67

Electrical connection - Process connection

Connector: 4 x M12; coding: A



IO-Link Port Class A X01...X04

1	+ 24 V DC (AUX)
2	digital input
3	GND (AUX)
4	C/Q IO-Link
5	not used

Electrical connection - подача напруги IN

Connector: 1 x M12; coding: A




X21

1	AS-i +
2	AUX -
3	AS-i -
4	AUX +

Electrical connection - подача напруги OUT

Connector: 1 x M12; coding: A



X22

1	AS-i +
2	AUX -
3	AS-i -
4	AUX +
5	not used