


DV2500



5-сегментна освітлювальна вежа з IO-Link керуванням

LED-Tower-5/IOL/Bracket

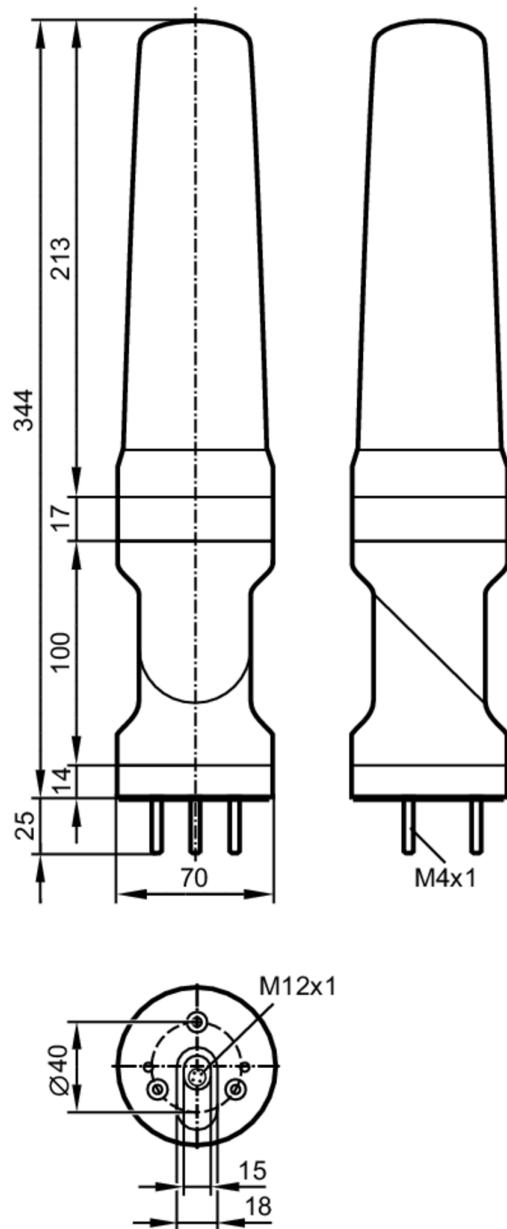

Application	
Application	signalling machine conditions
Electrical data	
Operating voltage [V]	18...30 DC; (to SELV/PELV)
Nominal voltage DC [V]	24
Current consumption [mA]	< 200
Inputs	
Input current High [mA]	6
Interfaces	
Communication interface	IO-Link



5-сегментна освітлювальна вежа з IO-Link керуванням

LED-Tower-5/IOL/Bracket

Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
SIO mode	yes	
Required master port type	A	
Min. process cycle time [ms]	3.2	
Supported DeviceIDs	Type of operation	DeviceID
	default	841

Operating conditions

Ambient temperature [°C]	-25...50
Storage temperature [°C]	-40...75
Max. relative air humidity [%]	90
Air pressure [kPa]	< 106
Max. height above sea level [m]	2000
Protection	IP 65

Mechanical data

Weight [g]	586
Type of mounting	Mounting base
Dimensions [mm]	Ø 70 / L = 344
Materials	housing: ABS; lens: PC

Displays / operating elements

Display	LED segment	5 x 4 LED
---------	-------------	-----------

Аксессуары

Accessories (optional)	mounting base, E89060
	wall bracket, E89061
	Mounting adapter, E89063
	bracket with lateral cable entry, E89064
	mounting tube, E89065
	mounting tube, E89066
	mounting tube, E89067

Remarks

Remarks	For further information please see the operating instructions.
Pack quantity	1 pcs.

5-сегментна освітлювальна вежа з IO-Link керуванням

LED-Tower-5/IOL/Bracket

Electrical connection - plug


Connector: M12; coding: A



1	UB+
2	not used
3	UB-
4	IO-Link (C/Q)

Diagrams and graphs

wall mounting

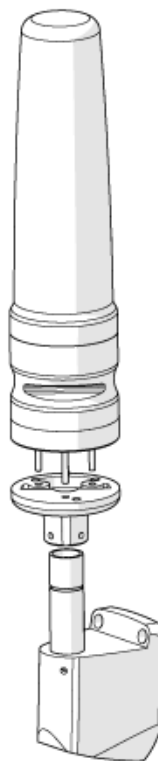

DV2500



5-сегментна освітлювальна вежа з IO-Link керуванням

LED-Tower-5/IOL/Bracket
base mounting

