


DV2530



5-сегментна освітлювальна вежа з IO-Link керуванням

LED-Tower-5/IOL/Buzzer

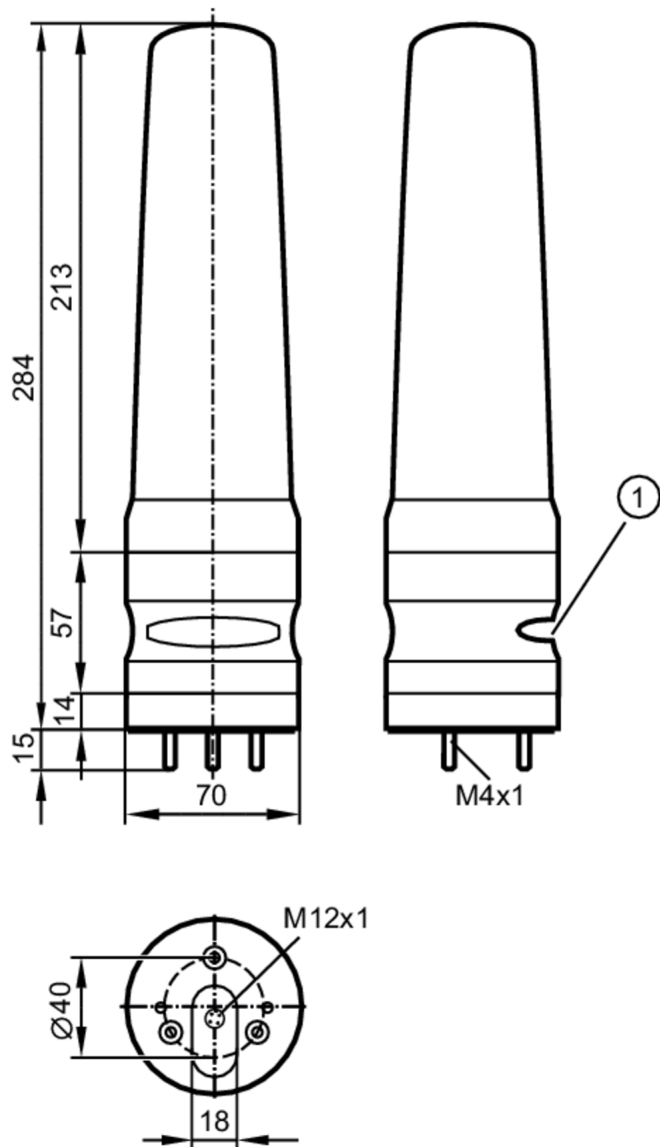

1 buzzer



Application	
Application	signalling machine conditions
Electrical data	
Operating voltage	[V] 18...30 DC; (to SELV/PELV)
Nominal voltage DC	[V] 24
Current consumption	[mA] < 200
Inputs	
Input current High	[mA] 6
Interfaces	
Communication interface	IO-Link
Transmission type	COM2 (38,4 kBaud)



5-сегментна освітлювальна вежа з IO-Link керуванням

LED-Tower-5/IOL/Buzzer

IO-Link revision	1.1				
SDCI standard	IEC 61131-9				
SIO mode	yes				
Required master port type	A				
Min. process cycle time [ms]	3.2				
Supported DeviceIDs	<table> <tr> <th>Type of operation</th><th>DeviceID</th></tr> <tr> <td>default</td><td>841</td></tr> </table>	Type of operation	DeviceID	default	841
Type of operation	DeviceID				
default	841				

Operating conditions

Ambient temperature [°C]	-25...50
Storage temperature [°C]	-40...75
Max. relative air humidity [%]	90
Air pressure [kPa]	< 106
Max. height above sea level [m]	2000
Protection	IP 54

Mechanical data

Weight [g]	563.5
Dimensions [mm]	Ø 70 / L = 284
Materials	housing: ABS; lens: PC

Displays / operating elements

Display	LED segment	5 x 4 LED
Acoustic signal	buzzer	
Max. sound pressure [dB]	85	

Аксессуары

Accessories (optional)	mounting base, E89060
	wall bracket, E89061
	Mounting adapter, E89063
	bracket with lateral cable entry, E89064
	mounting tube, E89065
	mounting tube, E89066
	mounting tube, E89067

Remarks

Remarks	For further information please see the operating instructions.
Pack quantity	1 pcs.

DV2530




5-сегментна освітлювальна вежа з IO-Link керуванням

LED-Tower-5/IOL/Buzzer

Electrical connection - plug


Connector: M12; coding: A



1	UB+
2	not used
3	UB-
4	IO-Link (C/Q)

Diagrams and graphs

wall mounting

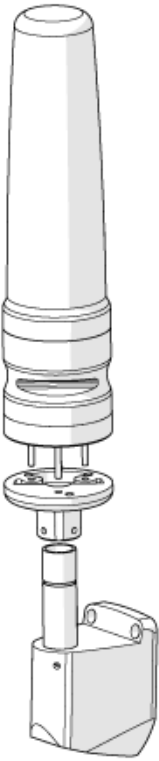

DV2530



5-сегментна освітлювальна вежа з IO-Link керуванням

LED-Tower-5/IOL/Buzzer
base mounting

