


E80392



RFID antenna adapter to increase the travel speed

ANT-AMP/490x40/KQ

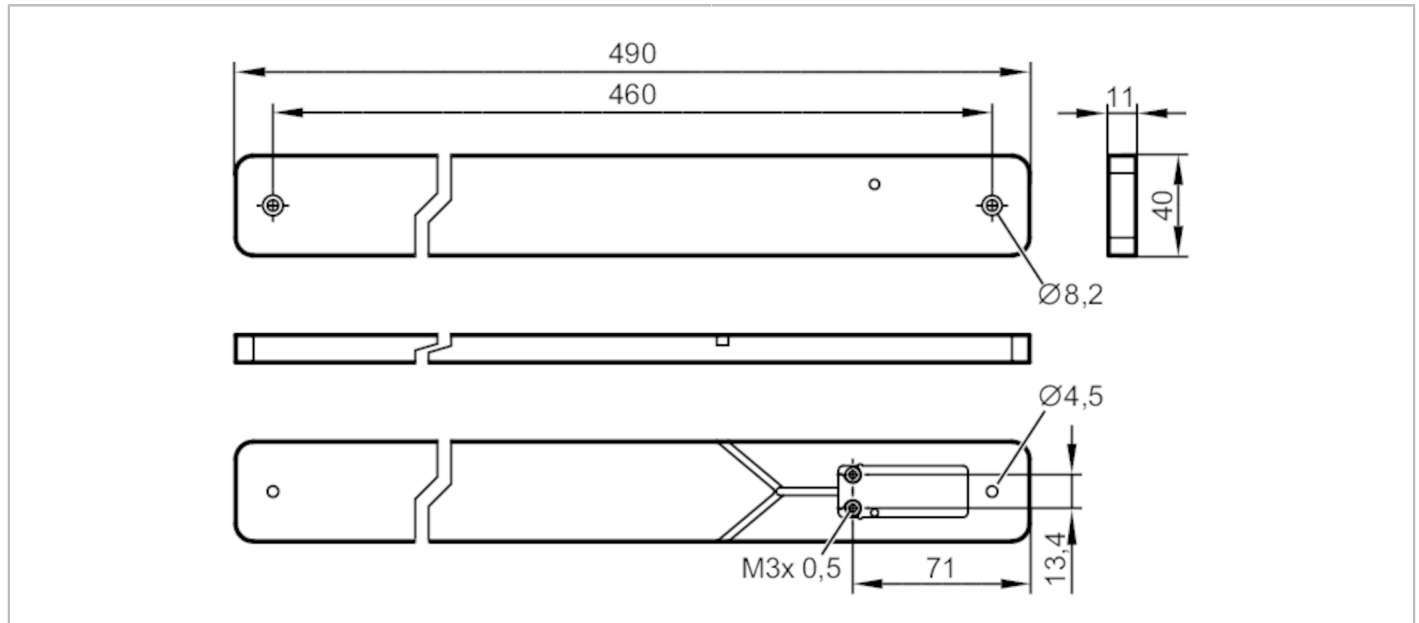

Electrical data

Operating frequency	[MHz]	13,56
---------------------	-------	-------

Operating conditions

Ambient temperature	[°C]	-20...60
Storage temperature	[°C]	-20...60

Mechanical data

Weight	[g]	370.5
Materials		POM
Tightening torque	[Nm]	0.5

Remarks

Pack quantity	1 pcs.
---------------	--------

Other data

Tag E80371 (30 mm)

antenna	range without metal			
ANT515 / ANT516 + E80392	30 mm			

Tag E80384 (50 mm)

antenna	range without metal			
ANT515 / ANT516 + E80392	50 mm			

E80392



RFID antenna adapter to increase the travel speed

ANT-AMP/490x40/KQ

Tag E80320 (ISO card)

antenna	range without metal			
ANT515 / ANT516 + E80392	75 mm			