





Prewired jumper with contact housing

BasicCable/Display inboard

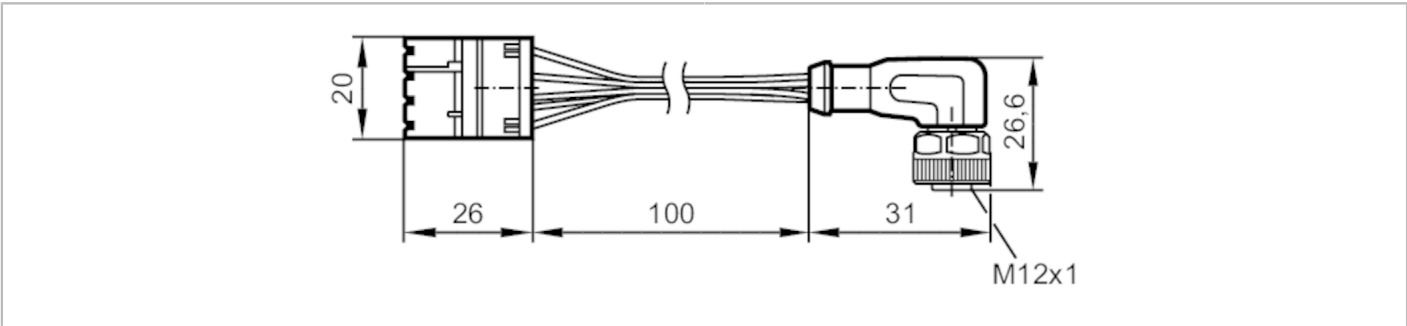

Application	
Design	wired, for BasicController and BasicDisplay, 1 x CR04xx, 1 x CR045x
Application	подача напруги; CAN bus
Operating conditions	
Ambient temperature	[°C] -40...85
Mechanical data	
Weight	[g] 23.2
Remarks	
Remarks	CAN bus terminating resistors (120 ohm) are integrated into the standard timer contact housing and the M12 connector use only sensible in conjunction with cover EC0402
Pack quantity	1 pcs.
Electrical connection	
Cable: 0.1 m; 5 x 0.34 mm²	

Connection

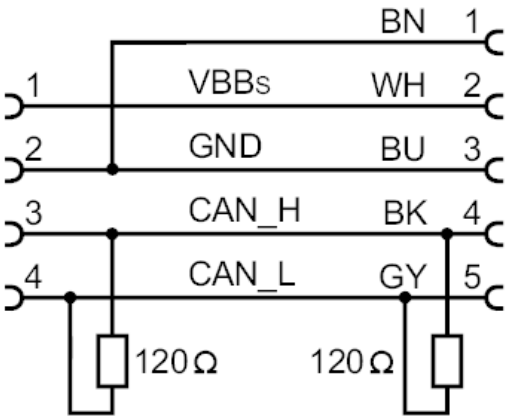

Core colours :	
BK =	black
BN =	brown
BU =	blue
GY =	grey
WH =	white

Connector: 1 x M12