


EC0455



Prewired jumper with contact housing

BasicCable/DisplayModules B

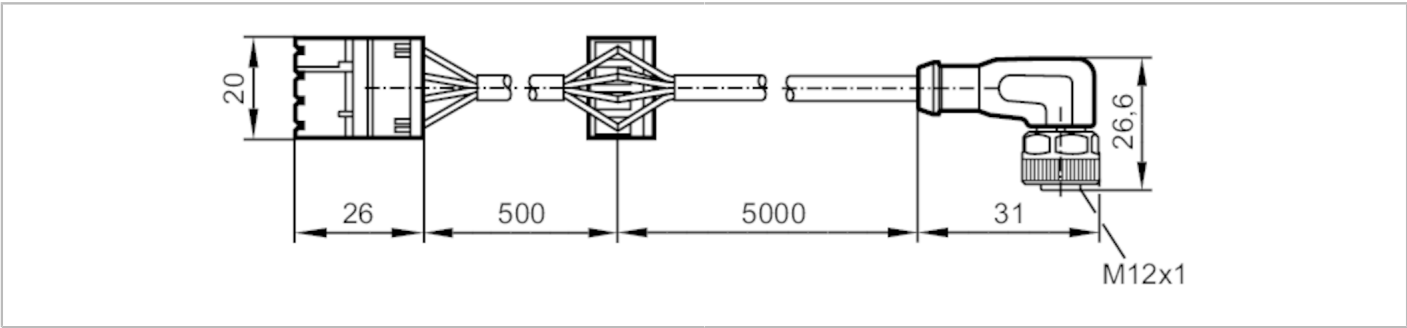

Application		
Design		wired, for BasicController and BasicDisplay, 2 x CR04xx, 1 x CR045x
Application		подача напруги; CAN bus
Operating conditions		
Ambient temperature	[°C]	-40...85
Mechanical data		
Weight	[g]	231.7
Remarks		
Remarks		CAN bus terminating resistors (120 ohm) are integrated into the standard timer contact housing and the M12 connector
Pack quantity		1 pcs.




## Prewired jumper with contact housing

BasicCable/DisplayModules B

### Electrical connection

Cable: 5 m, black; 5 x 0.34 mm<sup>2</sup>

### Connection

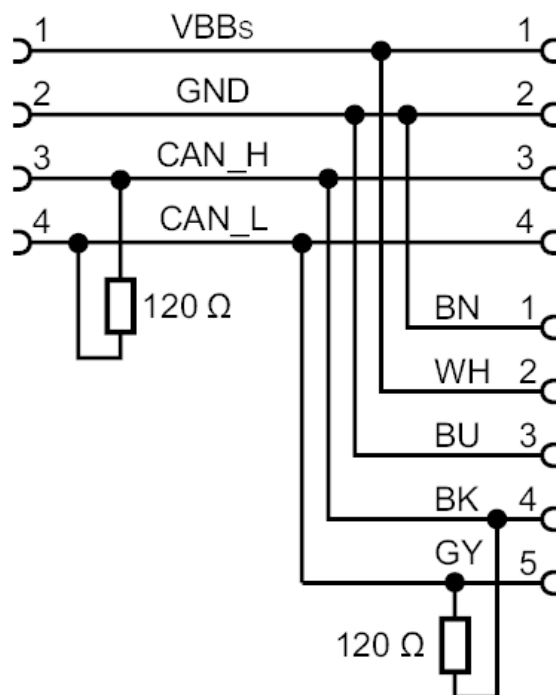

Core colours :  
 BK = black  
 BN = brown  
 BU = blue  
 GY = grey  
 WH = white

Connector: 1 x M12