


Inductive sensor

IDE2060-FBOW

Article no longer available - archive entry

Alternative articles: ID0013

When selecting an alternative article and accessories please note that technical data may differ!

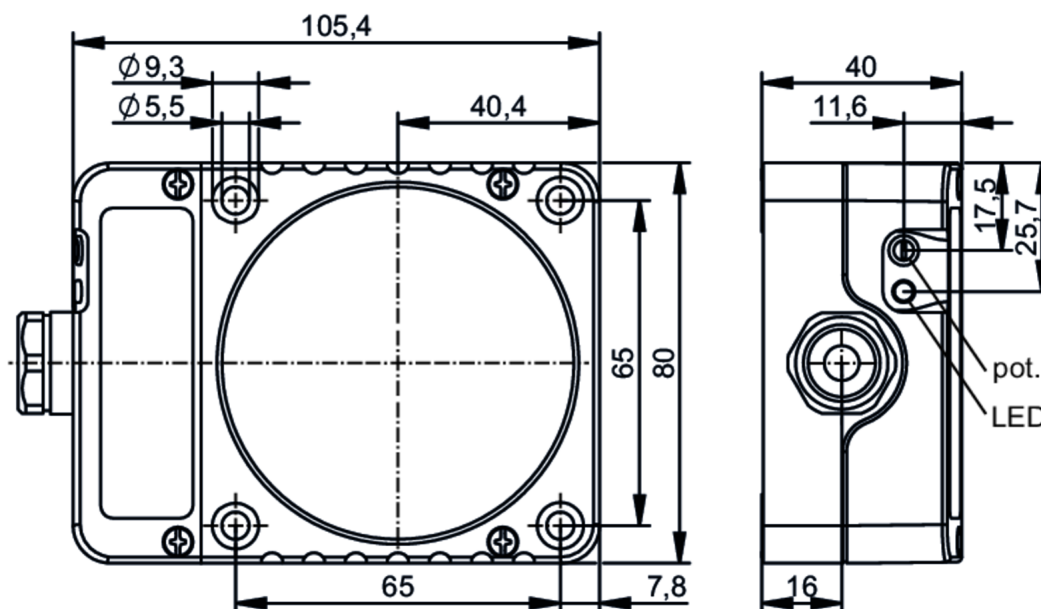

Product characteristics

Output function		normally open / normally closed; (selectable)
Sensing range	[mm]	60
Housing		rectangular
Dimensions	[mm]	105 x 80 x 40

Electrical data

Frequency AC	[Hz]	47...63
Operating voltage	[V]	20...250 AC
Protection class		II
Reverse polarity protection		no

Outputs

Output function		normally open / normally closed; (selectable)
Max. voltage drop switching output AC	[V]	5.5
Minimum load current	[mA]	5
Max. leakage current	[mA]	2.5
Permanent current rating of switching output AC	[mA]	300; (500 (...50 °C))
Short-time current rating of switching output	[mA]	2200; (20 ms / 0,5 Hz)
Switching frequency AC	[Hz]	4
Short-circuit protection		no
Overload protection		no



Inductive sensor

IDE2060-FBOW

Detection zone		
Sensing range	[mm]	60
Sensing range adjustable		yes
Factory setting sensing range	[mm]	60
Real sensing range S_r	[mm]	$60 \pm 10 \%$
Operating distance	[mm]	0...48.6

Accuracy / deviations		
Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.3 / copper: 0.2
Hysteresis	[X01]	1...15
Switch point drift	[X01]	-10...10

Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 65

Tests / approvals		
EMC	EN 60947-5-2	
	EN 55011	class B

Mechanical data		
Housing		rectangular
Mounting		non-flush mountable
Dimensions	[mm]	105 x 80 x 40
Materials		PPE modified

Displays / operating elements		
Display	switching status	1 x LED, yellow

Аксессуары		
Items supplied		screwdriver: 1

Remarks		
Pack quantity		1 pcs.

Electrical connection		
terminals: ...2.5 mm ²		

Connection

