


Inductive sensor

IFB3002-BPKG/3M/PH

phase-out article

Alternative articles: IFS307

When selecting an alternative article and accessories please note that technical data may differ!

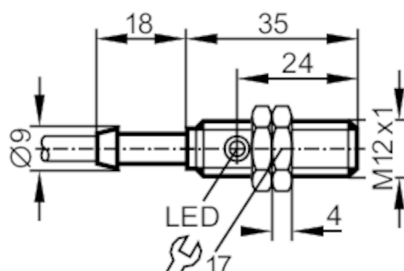

Product characteristics

Electrical design	PNP
Output function	normally open
Sensing range [mm]	2
Housing	threaded type
Dimensions [mm]	M12 x 1 / L = 35

Electrical data

Operating voltage [V]	10...36 DC
Current consumption [mA]	< 15
Protection class	II
Reverse polarity protection	yes

Outputs

Electrical design	PNP
Output function	normally open
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	150
Switching frequency DC [Hz]	1500
Short-circuit protection	yes
Type of short-circuit protection	pulsed
Overload protection	yes

Detection zone

Sensing range [mm]	2
Real sensing range Sr [mm]	2 ± 10 %
Operating distance [mm]	0...1.6

Accuracy / deviations

Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.4 / copper: 0.3
Hysteresis [X01]	3...15

IF6040



Inductive sensor

IFB3002-BPKG/3M/PH

Switch point drift	[X01]	-10...10
--------------------	-------	----------

Operating conditions

Ambient temperature	[°C]	-25...80
Protection		IP 67

Tests / approvals

EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-5 Surge	0,5 kV line to line, Ri: 2 Ohm
	EN 61000-4-6 HF conducted	10 V
	EN 55011 emission	class B
MTTF	[ANN]	2531

Mechanical data

Weight	[g]	112
Housing		threaded type
Mounting		flush mountable
Dimensions	[mm]	M12 x 1 / L = 35
Thread designation		M12 x 1
Materials		threaded sleeve: brass white bronze coated; sensing face: PC; lock nuts: brass

Displays / operating elements

Display	switching status	1 x LED, yellow
---------	------------------	-----------------

Аксессуары

Items supplied	lock nuts: 2
----------------	--------------


Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 3 m, PUR; highly flexible; 3 x 0.34 mm²

Connection

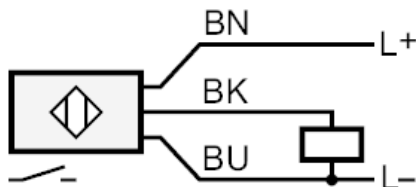

BN =	Core colours :
BU =	brown
BK =	blue
	black