

IN5262



Inductive sensor

IN-2004-FRKG/PH RT

Article no longer available - archive entry

Alternative articles: IN5208
When selecting an alternative article and accessories please note that technical data may differ!

1 mounting hole
2 threaded bush M3 Depth 5.8 mm
3 illustration (example)



Product characteristics		
Electrical design		PNP/NPN
Output function		normally open / normally closed; (selectable)
Sensing range	[mm]	4
Housing		rectangular
Dimensions	[mm]	40 x 12 x 26
Electrical data		
Operating voltage	[V]	10...55 DC
Protection class		II
Reverse polarity protection		yes
Outputs		
Electrical design		PNP/NPN
Output function		normally open / normally closed; (selectable)
Max. voltage drop switching output DC	[V]	4.6
Minimum load current	[mA]	4
Max. leakage current	[mA]	0.5
Permanent current rating of switching output DC	[mA]	300
Switching frequency DC	[Hz]	1200
Short-circuit protection		yes
Type of short-circuit protection		pulsed



Inductive sensor

IN-2004-FRKG/PH

RT

Overload protection	yes	
Detection zone		
Sensing range	[mm]	4
Real sensing range Sr	[mm]	4 ± 10 %
Operating distance	[mm]	0...3.25
Accuracy / deviations		
Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.3 / copper: 0.2	
Hysteresis	[X01]	1...15
Switch point drift	[X01]	-10...10
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection	IP 67	
Tests / approvals		
EMC	EN 60947-5-2	
	EN 55011	class B
Mechanical data		
Weight	[g]	104.2
Housing	rectangular	
Mounting	non-flush mountable	
Dimensions	[mm]	40 x 12 x 26
Materials	PBT	
Mounting hole		
Tightening torque	[Nm]	< 0.5
Threaded bush		
Tightening torque	[Nm]	< 1.2; (when brass insert in contact with counterpart)
Displays / operating elements		
Display	switching status	1 x LED, red
Remarks		
Pack quantity	1 pcs.	

IN5262



Inductive sensor



IN-2004-FRKG/PH

RT

Electrical connection

Cable: 2 m, PUR / PVC; 2 x 0.5 mm²

Connection

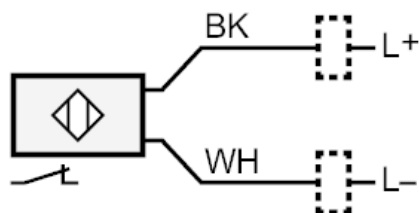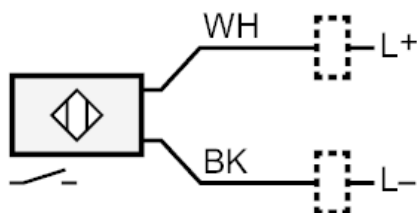

BK =
WH =

Core colours :
black
white