


Inductive sensor

IOW2010-ARKG/0,8M/US/UP RT

Article no longer available - archive entry

Alternative articles: IO5017

When selecting an alternative article and accessories please note that technical data may differ!

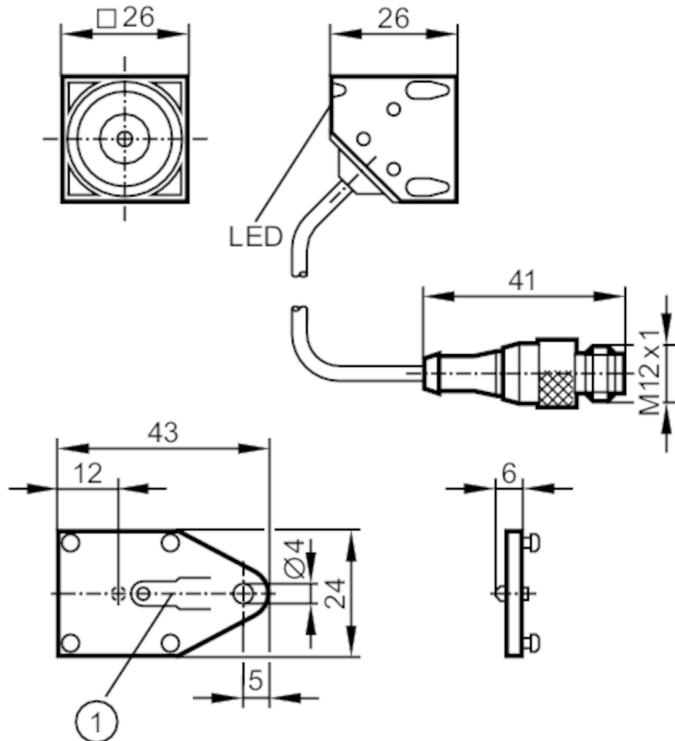

1 snap-fit mounting

CE

Product characteristics

Electrical design	PNP/NPN
Output function	normally open
Sensing range [mm]	10
Housing	rectangular
Dimensions [mm]	26 x 26 x 26

Electrical data

Operating voltage [V]	10...36 DC
Protection class	II
Reverse polarity protection	yes

Outputs

Electrical design	PNP/NPN
Output function	normally open
Max. voltage drop switching [V] output DC	4.5
Minimum load current [mA]	2

IO9922



Inductive sensor

IOW2010-ARKG/0,8M/US/UP RT

Max. leakage current	[mA]	0.6
Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	250
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes
Detection zone		
Sensing range	[mm]	10
Real sensing range Sr	[mm]	10 ± 10 %
Operating distance	[mm]	0...8.1
Accuracy / deviations		
Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.3 / copper: 0.2
Hysteresis	[X01]	1...15
Switch point drift	[X01]	-10...10
Operating conditions		
Ambient temperature	[°C]	-25...70
Protection		IP 67
Tests / approvals		
EMC	EN 60947-5-2	
	EN 55011	class B
Mechanical data		
Housing		rectangular
Mounting		flush mountable
Dimensions	[mm]	26 x 26 x 26
Materials		PA
Displays / operating elements		
Display	switching status	1 x LED, red
Аксесуари		
Items supplied		head cap screw: 1 x M4 x 10
Remarks		
Pack quantity		1 pcs.
Electrical connection - plug		
Cable: 0.8 m, PUR		
Connector: 1 x M12; coding: A		



IO9922



Inductive sensor

IOW2010-ARKG/0,8M/US/UP RT

Connection

