

KN5103




Capacitive sensor

KNM30NUAFNKG/US-100-DNX

Article no longer available - archive entry

Alternative articles: KI5086
When selecting an alternative article and accessories please note that technical data may differ!

Attention: the programming has changed.

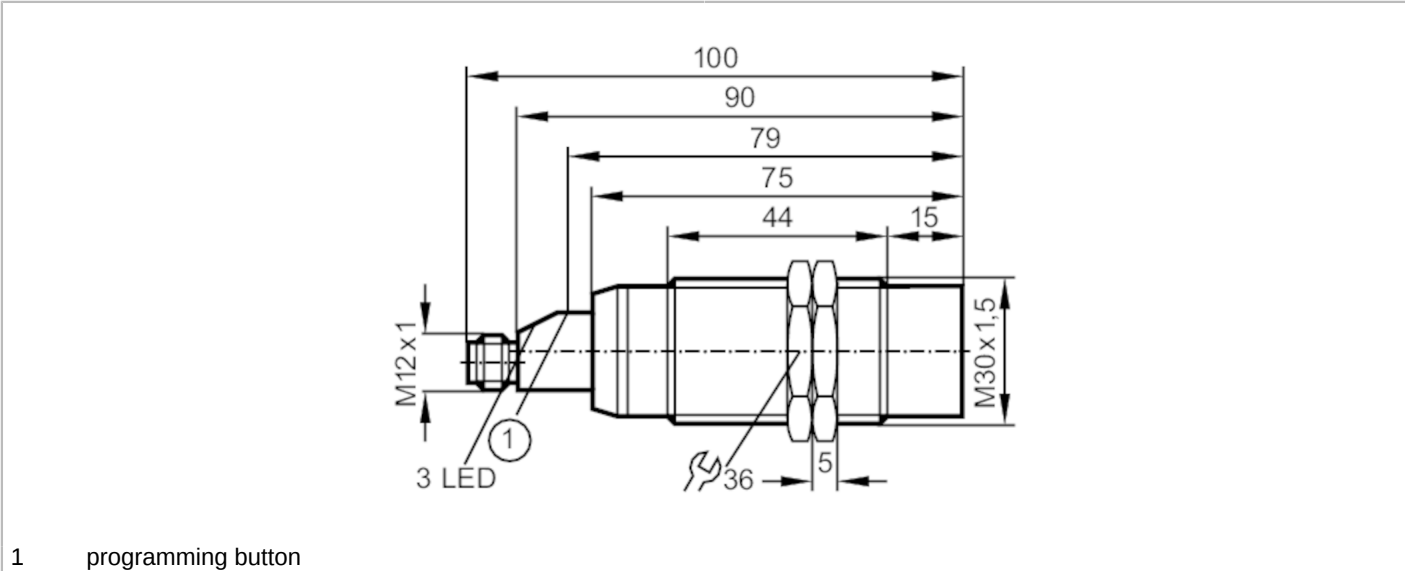

Product characteristics		
Electrical design		NPN
Output function		normally open / normally closed; (selectable)
Housing		threaded type
Dimensions	[mm]	M30 x 1.5 / L = 100
Application		
Special feature		Gold-plated contacts; Function check output
Installation		detection through non-metallic container walls
Media		dry bulk material; liquids
Medium temperature	[°C]	-25...80
Electrical data		
Operating voltage	[V]	10...36 DC
Current consumption	[mA]	30; (24 V)
Protection class		II
Reverse polarity protection		yes
Outputs		
Electrical design		NPN
Output function		normally open / normally closed; (selectable)
Max. voltage drop switching output DC	[V]	2.5
Function check output		yes

KN5103



Capacitive sensor

KNM30NUAFNKG/US-100-DNX

Max. voltage drop of function check output	[V]	3.5
Max. current load for function check output	[mA]	10
Permanent current rating of switching output DC	[mA]	250
Switching frequency DC	[Hz]	5
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes

Operating conditions

Ambient temperature	[°C]	-25...80
Protection		IP 67

Tests / approvals

EMC	EN 60947-5-2	
-----	--------------	--

Mechanical data

Housing		threaded type
Mounting		non-flush mountable
Dimensions	[mm]	M30 x 1.5 / L = 100
Thread designation		M30 x 1.5
Materials		brass Optalloy-plated; PBT

Displays / operating elements

Display	switching status	1 x LED, yellow
	operation	1 x LED, green
	function	1 x LED, red

Аксессуары

Items supplied	lock nuts: 2
----------------	--------------

Remarks

Pack quantity	1 pcs.
---------------	--------

KN5103





Capacitive sensor

KNM30NUAFNKG/US-100-DNX

Electrical connection - plug

Connector: 1 x M12; coding: A; Contacts: gold-plated

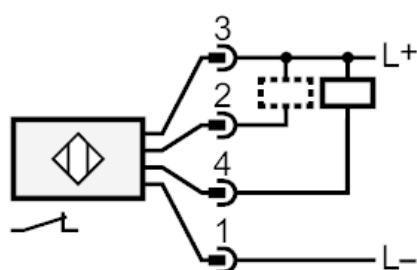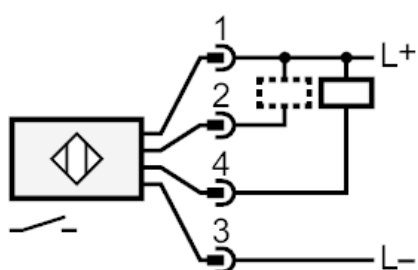

2: Function check output programming wire