


Capacitive sensor

KNQ01NUKFPKG/6M

Article no longer available - archive entry

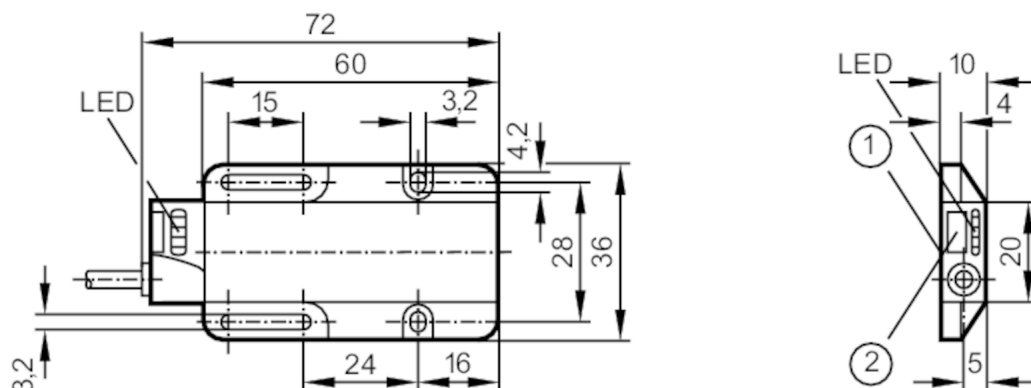

- 1 Sensing face
2 teach-in element



Product characteristics

Electrical design	PNP
Output function	normally open / normally closed; (selectable)
Sensing range [mm]	adjustment to the empty and full state possible
Housing	rectangular
Dimensions [mm]	72 x 36 x 10

Application

Special feature	Function check output
Installation	detection through non-metallic container wall or on bypass pipes
Media	dry bulk material; liquids
Recommended media	media with a dielectric constant < 20; oils

Electrical data

Operating voltage [V]	10...36 DC
Current consumption [mA]	30; (24 V)
Protection class	II
Reverse polarity protection	yes

Outputs

Electrical design	PNP
Output function	normally open / normally closed; (selectable)
Max. voltage drop switching output DC [V]	2.5
Function check output	yes
Max. voltage drop of function check output [V]	3.5
Max. current load for function check output [mA]	10
Permanent current rating of switching output DC [mA]	150

KN5117



Capacitive sensor

KNQ01NUKFPKG/6M

Switching frequency DC	[Hz]	5
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes

Detection zone

Sensing range	[mm]	adjustment to the empty and full state possible
---------------	------	---

Operating conditions

Ambient temperature	[°C]	-25...80
Protection		IP 67

Tests / approvals

EMC	EN 60947-5-2	
-----	--------------	--

Mechanical data

Housing		rectangular
Mounting		non-flush mountable
Dimensions	[mm]	72 x 36 x 10
Materials		PC; PBT

Displays / operating elements

Display	switching status	1 x LED, yellow
	operation	1 x LED, green
	function	1 x LED, red

Аксессуары

Items supplied		screwdriver: 1
----------------	--	----------------



Remarks

Pack quantity		1 pcs.
---------------	--	--------

Electrical connection

Cable: 6 m, PVC; 4 x 0.14 mm²

Connection

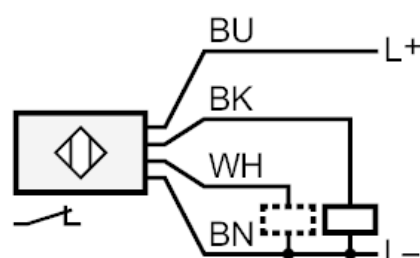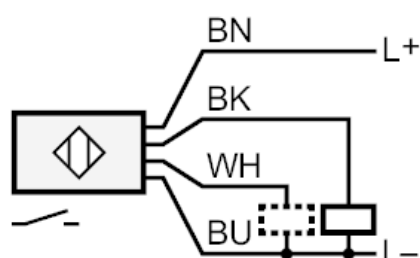

WH: Function check output programming wire
Core colours :
BK = black
BN = brown
BU = blue
WH = white