




Inductive NAMUR dual sensor for valve actuators

IND2004DN/1D/1G/2G

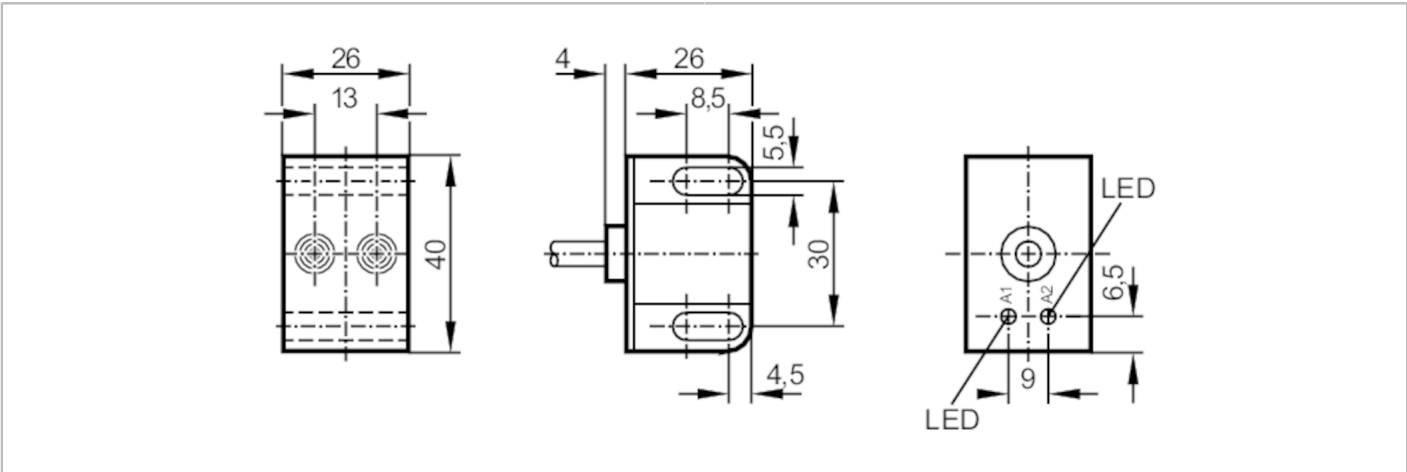


Product characteristics		
Electrical design		NAMUR
Output function		2 x normally closed
Sensing range	[mm]	4
Housing		rectangular
Dimensions	[mm]	40 x 26 x 26
Electrical data		
Connection to switching amplifiers		yes
Switching amplifiers		connection to certified intrinsically safe circuits with the max. values: U = 15 V / I = 50 mA / P = 120 mW
Nominal voltage DC	[V]	8.2; (1kΩ)
Supply voltage DC	[V]	7.5...15
Current consumption	[mA]	< 1; (disabled; conductive: > 2,1)
Protection class		III
Outputs		
Electrical design		NAMUR
Output function		2 x normally closed
Switching frequency DC	[Hz]	1800
Detection zone		
Sensing range	[mm]	4
Real sensing range Sr	[mm]	4 ± 10 %
Accuracy / deviations		
Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3
Hysteresis	[X01]	1...15
Switch point drift	[X01]	-10...10
Operating conditions		
Ambient temperature	[°C]	-20...80
Protection		IP 67



Inductive NAMUR dual sensor for valve actuators

IND2004DN/1D/1G/2G

Tests / approvals		
Approval	DMT 02 ATEX E 028; BVS 04 ATEX E 153 X; IECEx BVS 06.0003X; TIIS TC17612	
ATEX marking	Ex II 1G Ex ia IIB T6 Ga Ta -20...70°C	
	Ex II 1G Ex ia IIB T5 Ga Ta -20...80°C	
	Ex II 2G Ex ia IIC T6 Gb Ta -20...70°C	
	Ex II 2G Ex ia IIC T5 Gb Ta -20...80°C	
	Ex II 1D Ex ia IIIC T20090°C Da Ta: -20...70°C	
	Ex II 1D Ex ia IIIC T200100° C Da Ta: -20...80°C	
EMC	EN 60947-5-6	
Shock/vibration resistance	30 g (11 ms) / 10-55 Hz (1 mm)	
MTTF	[ANN]	1253
Safety classification		
Max. internal capacitance	[nF]	140; (per intrinsically safe circuit)
Max. internal inductance	[µH]	130; (per intrinsically safe circuit)
Mechanical data		
Weight	[g]	162.5
Housing		rectangular
Mounting		non-flush mountable
Dimensions	[mm]	40 x 26 x 26
Materials		housing: PBT; cover: PC
Displays / operating elements		
Display	switching status	2 x LED, yellow
Remarks		
Pack quantity		1 pcs.
Electrical connection		
Cable: 2 m, silicone; 4 x 0.34 mm²		
Connection		

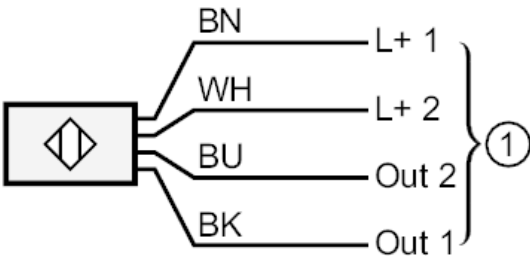

- 1 = connection to NAMUR amplifiers
- Core colours :
- BK = black
- BN = brown
- BU = blue
- WH = white