




Induktiver NAMUR-Sensor

ITA21,5-N

Article no longer available - archive entry



Product characteristics

Electrical design	NAMUR
Output function	normally closed
Sensing range [mm]	1.5
Housing	cylindrical
Dimensions [mm]	Ø 6.5 / L = 30

Electrical data

Connection to switching amplifiers	yes
Switching amplifiers	connection to switching amplifiers NV0100, NV0200 or other approved switching amplifiers with the max. values: U = 16 V / I = 50 mA / P = 180 mW (T5) / P = 123 mW (T6)
Nominal voltage DC [V]	8.2; (1kΩ)
Supply voltage DC [V]	5...25
Current consumption [mA]	< 1; (disabled; conductive: > 2,1)

Outputs

Electrical design	NAMUR
Output function	normally closed
Max. cable resistance [Ω]	50
Switching frequency DC [Hz]	1000

Detection zone

Sensing range [mm]	1.5
--------------------	-----

Operating conditions

Ambient temperature [°C]	0...60
Protection	IP 67

Tests / approvals

Approval	PTB-Zulassungs-Nr. Ex-00.E.2013; Gerätekennzeichnung: EEx ia IIC T5/T6
Shock/vibration resistance	30 g (11 ms) / 10-55 Hz (1 mm)

Safety classification

Max. internal capacitance [nF]	80
Max. internal inductance [μH]	110

Mechanical data

Housing	cylindrical
Mounting	flush mountable


NT5010



Induktiver NAMUR-Sensor

ITA21,5-N

Dimensions	[mm]	Ø 6.5 / L = 30
Materials	brass nickel-plated; PBT	
Remarks		
Pack quantity	1 pcs.	
Electrical connection		
Cable: 2 m, PVC; 2 x 0.14 mm²		
Connection		

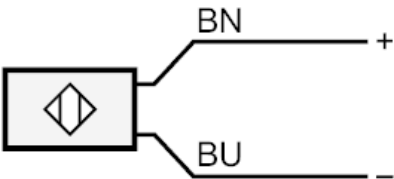

BN = Core colours :
brown
BU = blue