


O4E500



Through-beam sensor receiver

O4E-FPKG/US100

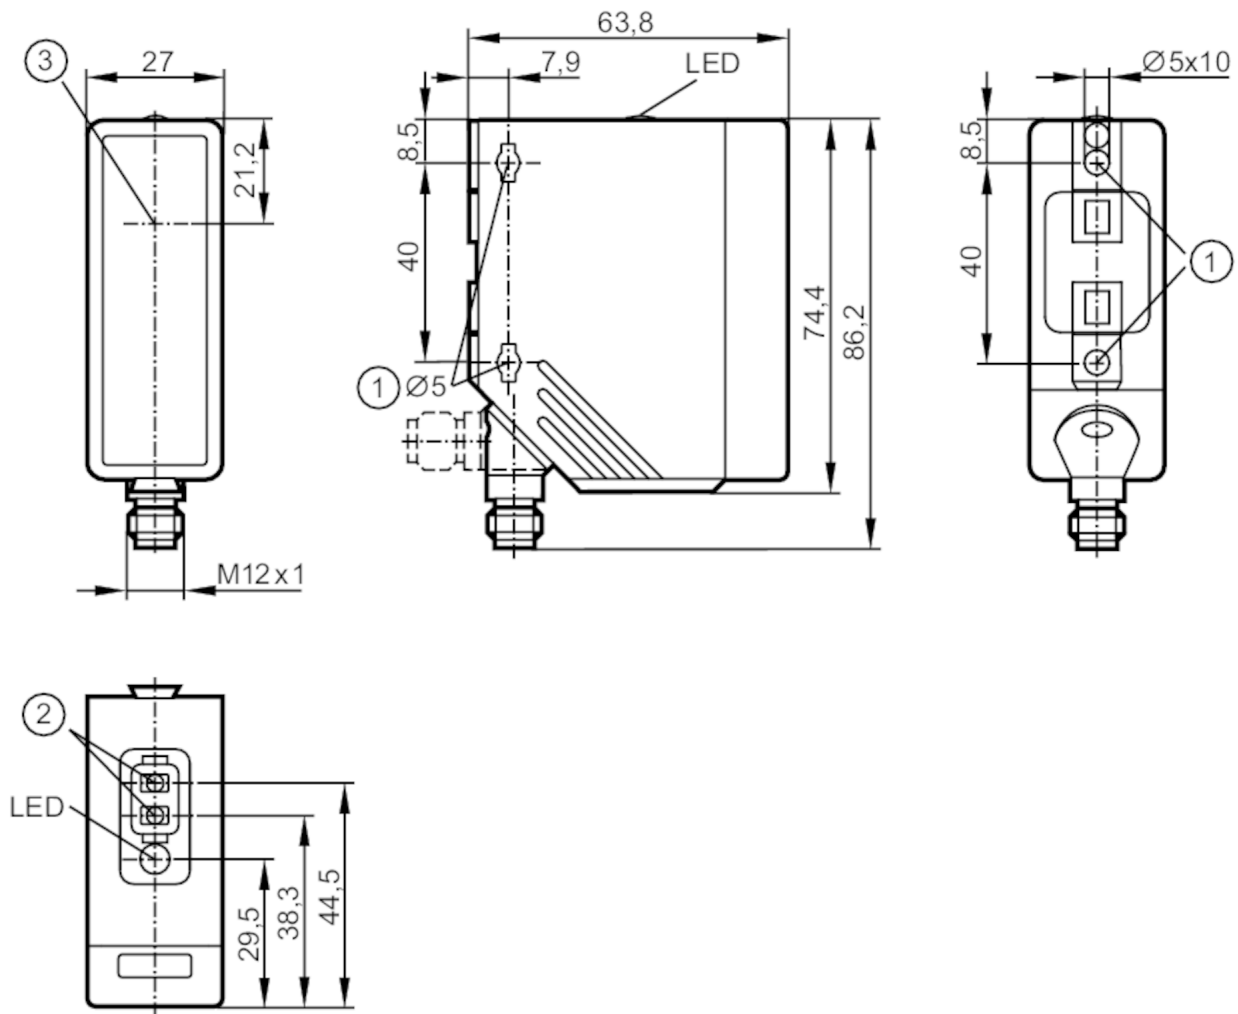

- 1 When a M5 mounting screw is used, the max. tightening torque is 2 Nm.
2 programming buttons



Product characteristics

Type of light	red light
Housing	rectangular

Application

Function principle	Through-beam sensor
--------------------	---------------------

Electrical data

Operating voltage	[V]	10...36 DC; ("supply class 2" to cULus)
Current consumption	[mA]	12
Protection class		II
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	624

Outputs

Electrical design	PNP
-------------------	-----



Through-beam sensor receiver

O4E-FPKG/US100

Output function	light-on/dark-on mode; (programmable)	
Max. voltage drop switching output DC [V]	2.5	
Permanent current rating of switching output DC [mA]	200	
Switching frequency DC [Hz]	1000	
Short-circuit protection	yes	
Type of short-circuit protection	pulsed	
Overload protection	yes	

Detection zone

Transmitter / receiver	receiver	
Range [m]	0...80	
Range adjustable	yes	

Operating conditions

Ambient temperature [°C]	-25...60	
Protection	IP 67	

Tests / approvals

EMC	EN 60947-5-2	
MTTF [ANN]	785	

Mechanical data

Weight [g]	124	
Housing	rectangular	
Dimensions [mm]	74.4 x 27 x 63.8	
Materials	housing: PA; bezel: stainless steel; operator interface: TPE	
Lens material	PMMA	
Lens alignment	side lens	

Displays / operating elements

Display	switching status	1 x LED, yellow
Teach function	yes	
Electronic lock	yes	

Remarks

Pack quantity	1 pcs.	
---------------	--------	--

Electrical connection


Connector: 1 x M12; coding: A



Through-beam sensor receiver


O4E-FPKG/US100

Connection

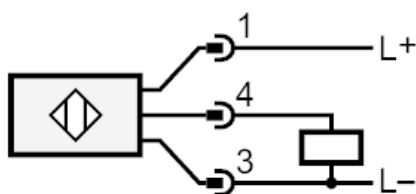

Diagrams and graphs

excess gain graph

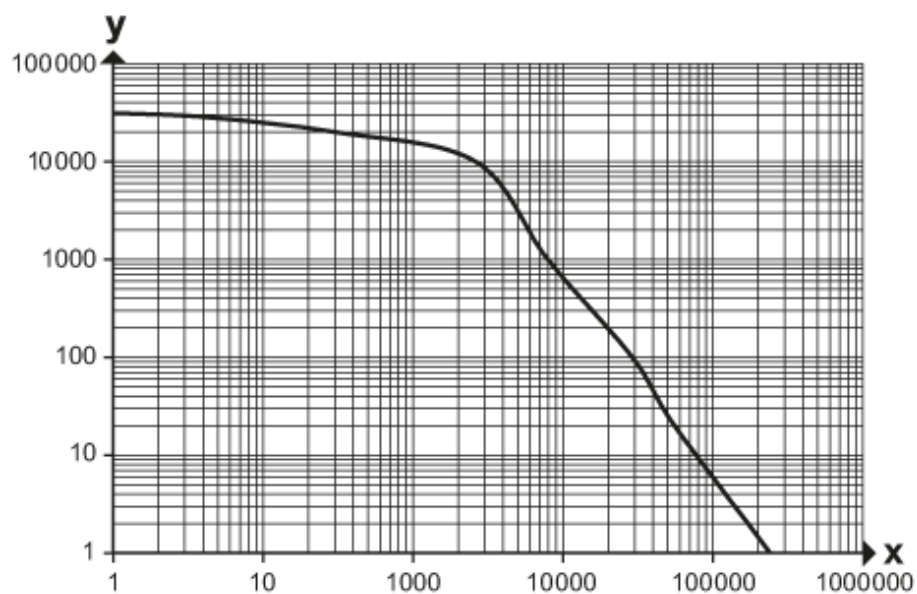

x: Abstand [mm]

y: Funktionsreservefaktor