


# O6T210



## Diffuse reflection sensor

O6T-CPKG/AS/4P

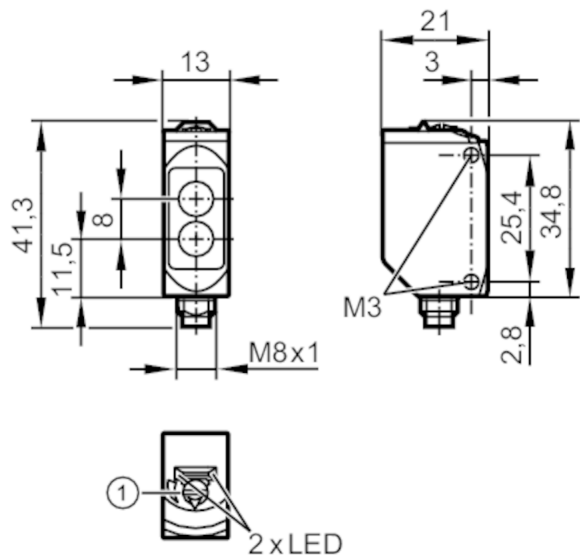

- 1 potentiometer sensitivity receiver in upper lens transmitter in lower lens



### Product characteristics

Type of light	red light
Housing	rectangular

### Application

Function principle	Diffuse reflection sensor
--------------------	---------------------------

### Electrical data

Operating voltage	[V]	10...30 DC
Current consumption	[mA]	16; ((24 V))
Protection class		III
Reverse polarity protection		yes
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	633


### Outputs

Electrical design		PNP
Output function		complementary
Max. voltage drop switching output DC	[V]	0.5
Minimum load current	[mA]	10
Max. leakage current	[mA]	0.1
Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	1000
Short-circuit protection		yes



## Diffuse reflection sensor


O6T-CPKG/AS/4P

Type of short-circuit protection	pulsed	
Detection zone		
Range	[mm]	5...500; (white paper 200 x 200 mm 90% remission)
Setting range	[mm]	5...500
Range adjustable		yes
Max. light spot diameter	[mm]	15
Light spot dimensions refer to		at maximum range
Response times		
Response time	[s]	< 300
Operating conditions		
Ambient temperature	[°C]	-10...60
Protection		IP 65; IP 67
Tests / approvals		
EMC	EN 60947-5-2	
MTTF	[ANN]	1172
UL approval	UL Approval no.	E009
Mechanical data		
Weight	[g]	15.8
Housing		rectangular
Dimensions	[mm]	46 x 13 x 21
Materials		housing: ABS; PPSU
Lens material		PMMA
Lens alignment		side lens
Sealing material		EPDM
Tightening torque	[Nm]	0.5; (screws)
Displays / operating elements		
Display	switching status	1 x LED, yellow
	operation	1 x LED, green
Remarks		
Remarks	operating voltage "supply class 2" according to cULus	
Pack quantity	1 pcs.	
Electrical connection		
Connector: 1 x M8; coding: A; Locking: metal, coated; Sealing: EPDM		
<div></div>		

## Diffuse reflection sensor


O6T-CPKG/AS/4P

### Connection

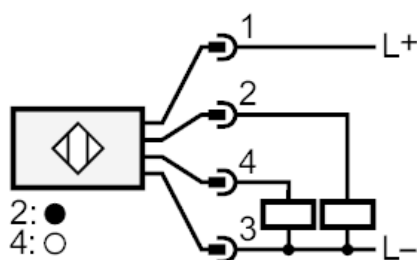

### Diagrams and graphs

excess gain graph

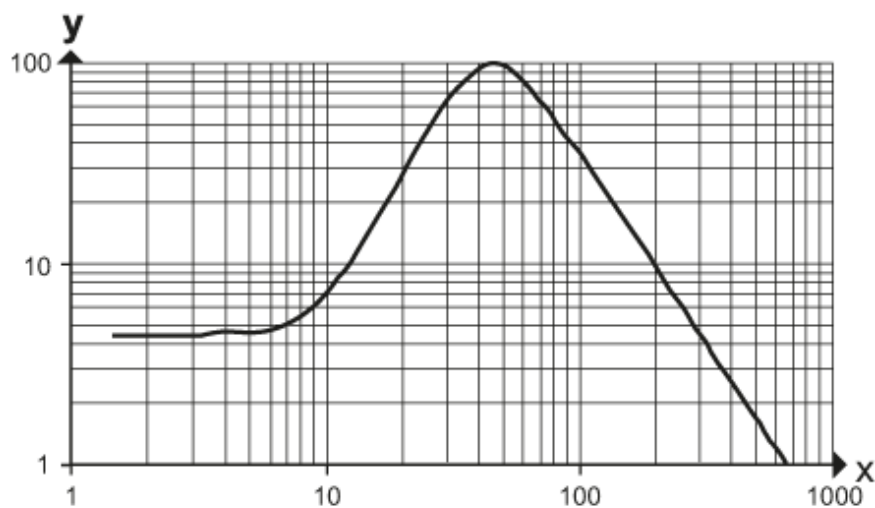

x: distance [mm]

y: excess gain factor