


O8E203



Through-beam sensor receiver

O8E-DNKG/0,30M/AS/3P

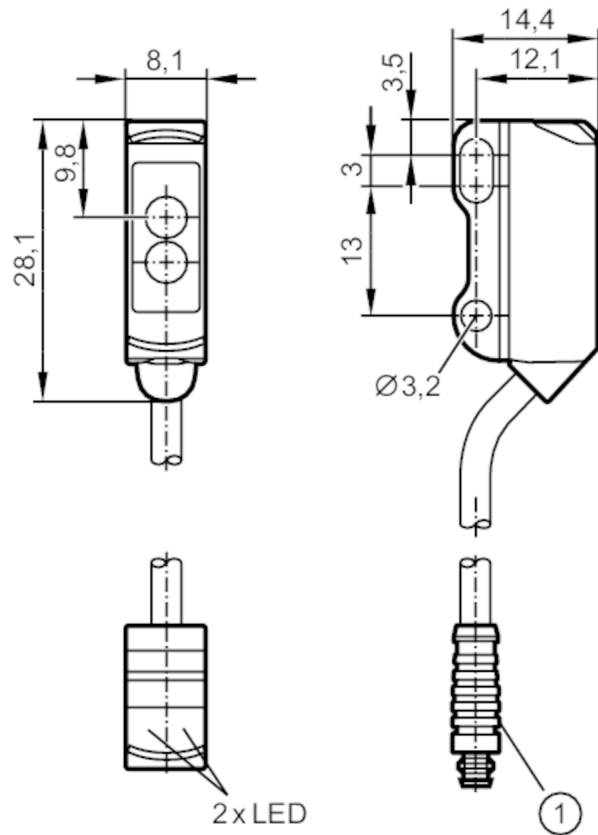

1 receiver in upper lens
illustration (example)



Product characteristics

Type of light	red light
Housing	rectangular

Application

Function principle	Through-beam sensor
--------------------	---------------------

Electrical data

Operating voltage	[V]	10...30 DC
Current consumption	[mA]	15; ((24 V))
Protection class		III
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	633

Outputs

Electrical design	NPN
Output function	dark-on mode
Max. voltage drop switching output DC [V]	2.5



Through-beam sensor receiver

O8E-DNKG/0,30M/AS/3P

Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	1000
Short-circuit protection		yes
Type of short-circuit protection		pulsed

Detection zone

Transmitter / receiver		receiver
Range	[m]	< 3

Operating conditions

Ambient temperature	[°C]	-25...60
Protection		IP 65; IP 67

Tests / approvals

EMC		EN 60947-5-2
MTTF	[ANN]	1152
UL approval	Ta	-25...60 °C
	Enclosure type	Type 1
	подача напруги	Limited Voltage/Current
	UL Approval no.	E015
	File number UL	E174191

Mechanical data

Weight	[g]	23.5
Housing		rectangular
Dimensions	[mm]	28.1 x 8.1 x 14.4
Materials		housing: ABS; stainless steel (1.4404 / 316L)
Lens material		PMMA
Lens alignment		side lens

Displays / operating elements

Display	switching status	1 x LED, yellow
	operation	1 x LED, green

Remarks

Pack quantity		1 pcs.
---------------	--	--------

Electrical connection

Cable: 0.3 m, PVC, black, Ø 2.9 mm; 3 x 0.08 mm²


Connector: 1 x M8; coding: A



Through-beam sensor receiver


O8E-DNKG/0,30M/AS/3P

Connection

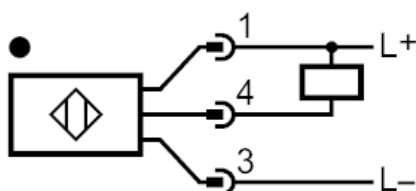

Diagrams and graphs

excess gain graph

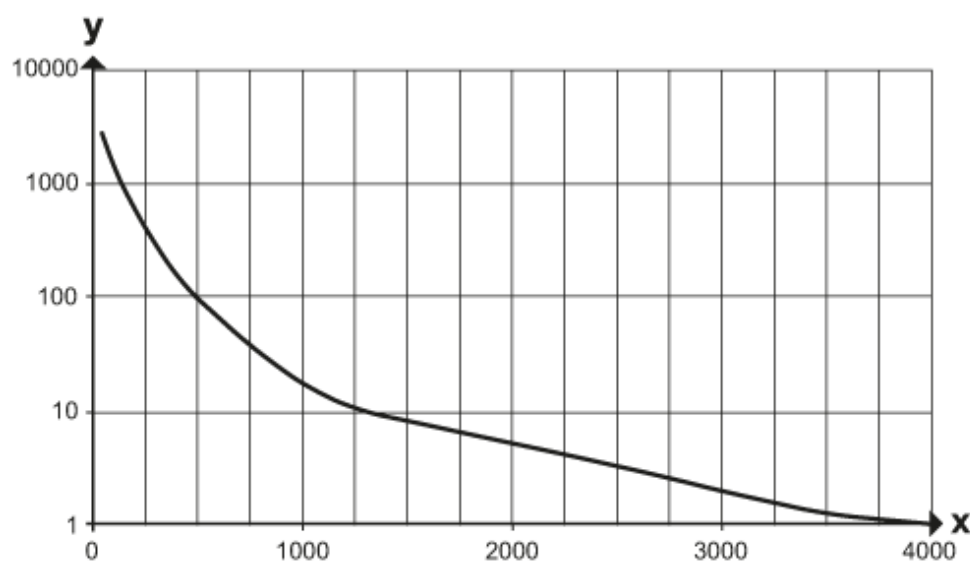

x: distance [mm]

y: excess gain factor