

# OB5012




## Fibre-optic amplifier

OBF-FNKG/T

Article no longer available - archive entry

Alternative articles: OBF502

When selecting an alternative article and accessories please note that technical data may differ!

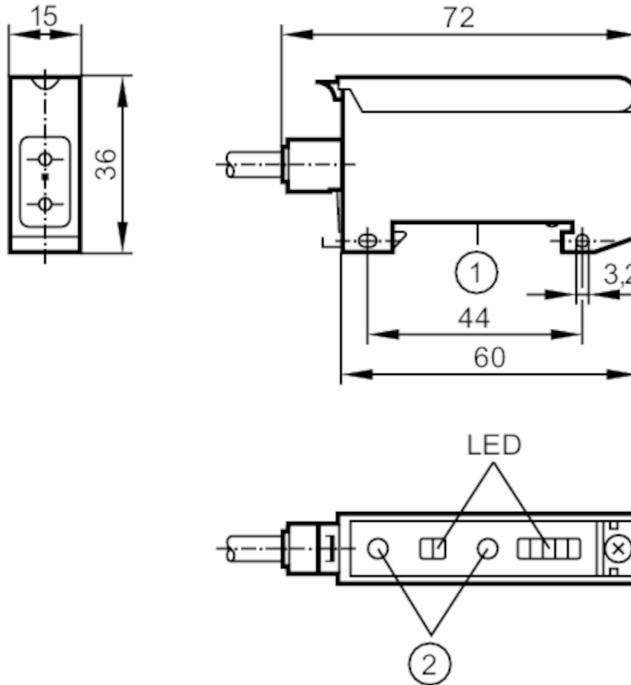

- 1 mounting on DIN rail  
2 setting pushbuttons

### Product characteristics

Type of light	red light
Housing	rectangular

### Application

Special feature	Function check output
-----------------	-----------------------

### Electrical data

Operating voltage [V]	10...36 DC
Current consumption [mA]	< 35
Protection class	II
Reverse polarity protection	yes
Type of light	red light
Wave length [nm]	660

### Outputs

Electrical design	NPN
Output function	light-on/dark-on mode; (parameterisable)
Max. voltage drop switching output DC [V]	2.5
Function check output	yes
Max. voltage drop of function check output [V]	3.5

# OB5012

## Fibre-optic amplifier

OBF-FNKG/T



Max. current load for function [mA]		10
check output		
Permanent current rating of switching output DC [mA]		100
Switching frequency DC [Hz]		500
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes
Time function [s]		0.002...0.09
<b>Detection zone</b>		
Range [m]		0...1.2; (Through-beam sensor)
Range [mm]		0...70; (Diffuse reflection sensor)
Range adjustable		yes
<b>Operating conditions</b>		
Ambient temperature [°C]		-25...60
Protection		IP 65
<b>Tests / approvals</b>		
EMC	EN 60947-5-2	
	EN 55011	class B
<b>Mechanical data</b>		
Housing		rectangular
Dimensions [mm]		36 x 15 x 60
Materials		\$3SGLWE
<b>Displays / operating elements</b>		
Display	switching status	1 x LED, yellow
	operation	1 x LED, green
	unsafe zone	1 x LED, red
	excess gain	4 x LED, green
<b>Remarks</b>		
Remarks	light-on mode corresponds to the NC output function for through-beam fibre optics	
	corresponds to the NO output function for diffuse-reflection fibre optics	
	dark-on mode corresponds to the NO output function for through-beam fibre optics	
	corresponds to the NC output function for diffuse-reflection fibre optics	
Pack quantity		1 pcs.



## Fibre-optic amplifier

OBF-FNKG/T

### Electrical connection

Cable: 2 m, PVC; 4 x 0.34 mm<sup>2</sup>

### Connection

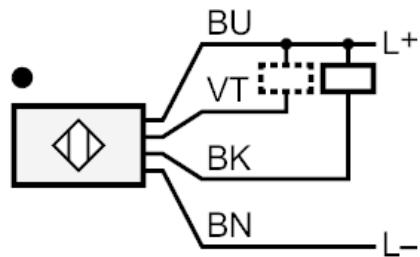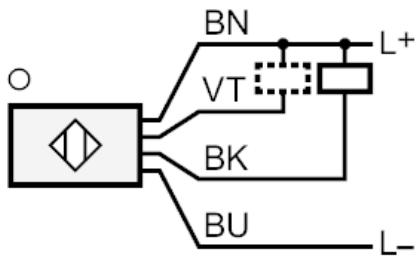

lilac

Function check output

Core colours :

BK =

black

BN =

brown

BU =

blue

VT =

lilac

### Diagrams and graphs

excess gain graph

