



Through-beam sensor receiver

OGE-FNKG/US-100 MIT 90GRAD WKL

Article no longer available - archive entry

No scale drawing available

Product characteristics

Housing	threaded type
---------	---------------

Application

Special feature	Function check output
Function principle	Through-beam sensor

Electrical data

Operating voltage	[V]	10...36 DC
Current consumption	[mA]	26; ((36 V))
Protection class		II
Reverse polarity protection		yes

Outputs

Electrical design		NPN
Output function		light-on/dark-on mode; (parameterisable)
Max. voltage drop switching output DC	[V]	2.5
Function check output		yes
Max. voltage drop of function check output	[V]	3.5
Max. current load for function check output	[mA]	10
Permanent current rating of switching output DC	[mA]	200
Switching frequency DC	[Hz]	500
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes



Through-beam sensor receiver

OGE-FNKG/US-100 MIT 90GRAD WKL


Detection zone		
Transmitter / receiver		receiver
Range	[m]	< 12
Range adjustable		yes
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 67
Tests / approvals		
EMC	EN 60947-5-2	
	EN 55011	class B
Mechanical data		
Housing		threaded type
Dimensions	[mm]	M18 x 1
Thread designation		M18 x 1
Materials		PC
Lens material		PMMA
Displays / operating elements		
Display	switching status	1 x LED, yellow
	operation	1 x LED, green
	function	1 x LED, red
Аксессуары		
Items supplied		lock nuts: 2
Remarks		
Pack quantity		1 pcs.
Electrical connection		
Connector: 1 x M12; coding: A		
		



Through-beam sensor receiver

OGE-FNKG/US-100 MIT 90GRAD WKL

Connection

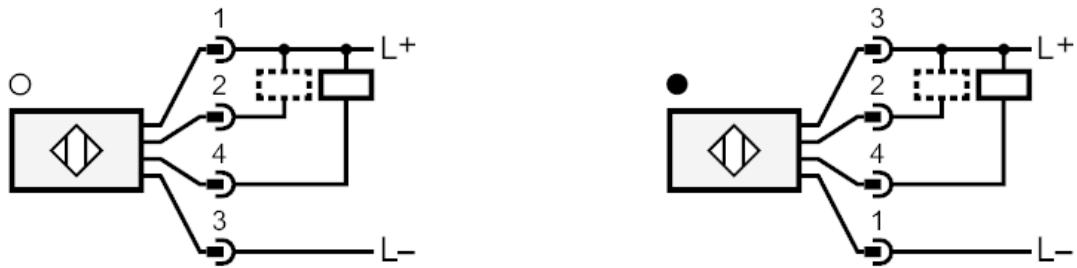

2

Function check output