




Through-beam sensor receiver

OLE-FPKG

Article no longer available - archive entry

Alternative articles: O5E500 + E11509 + E21122

When selecting an alternative article and accessories please note that technical data may differ!

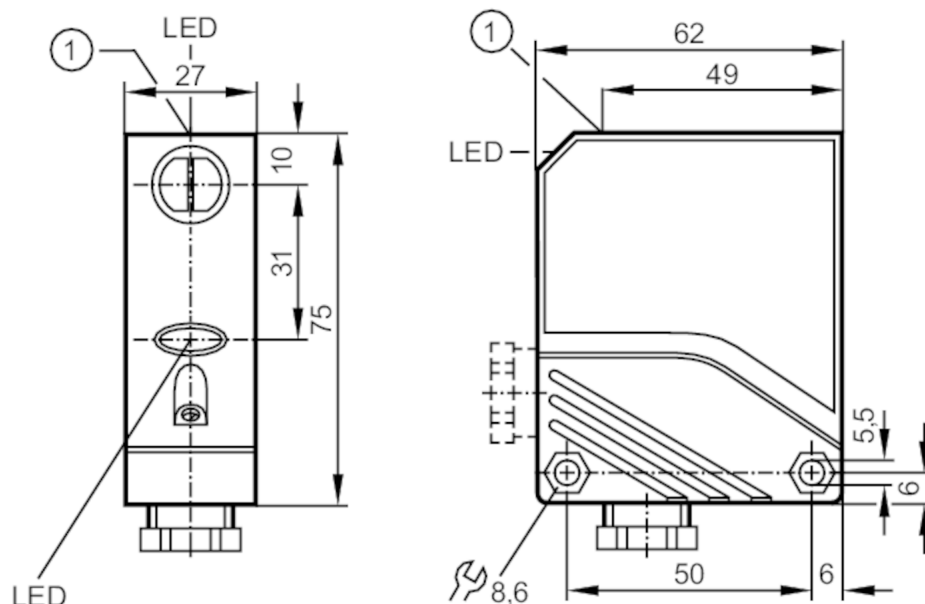

1 pushbutton

Product characteristics

Type of light	infrared light
Housing	rectangular

Application

Special feature	Function check output
Function principle	Through-beam sensor

Electrical data

Operating voltage	[V]	10...36 DC
Current consumption	[mA]	< 30
Protection class		II
Reverse polarity protection		yes
Overvoltage protection		yes
Type of light		infrared light
Wave length	[nm]	880

Outputs

Electrical design		PNP
Output function		light-on/dark-on mode; (parameterisable)
Max. voltage drop switching output DC	[V]	2.5
Function check output		yes
Max. voltage drop of function check output	[V]	3.5



Through-beam sensor receiver

OLE-FPKG

Max. current load for function check output [mA]	10
Permanent current rating of switching output DC [mA]	100; (200 (...50 °C))
Switching frequency DC [Hz]	500
Short-circuit protection	yes
Type of short-circuit protection	pulsed

Detection zone	
Transmitter / receiver	receiver
Range [m]	< 25

Operating conditions	
Ambient temperature [°C]	-25...80
Protection	IP 67

Tests / approvals		
EMC	EN 60947-5-2	
	EN 55011	class B


Mechanical data	
Housing	rectangular
Dimensions [mm]	75 x 27 x 62
Materials	PA; PBT
Lens material	PMMA

Displays / operating elements		
Display	switching status	1 x LED, yellow
	operation	1 x LED, green
	function	1 x LED, red

Remarks	
Pack quantity	1 pcs.

Electrical connection	
terminals: ...1.5 mm ² ; Cable sheath: Ø 4.5...10 mm; Cable gland: M16 X 1.5	

Connection

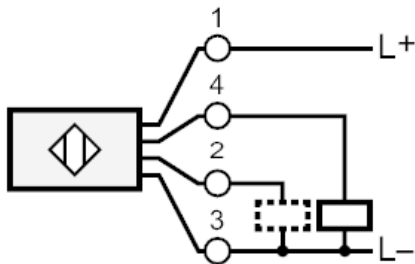



Through-beam sensor receiver

OLE-FPKG

Diagrams and graphs

excess gain graph

