


Through-beam sensor receiver

OLELFNKG/US-100

Article no longer available - archive entry

Alternative articles: O5E700 + EVC01E + E21122

When selecting an alternative article and accessories please note that technical data may differ!

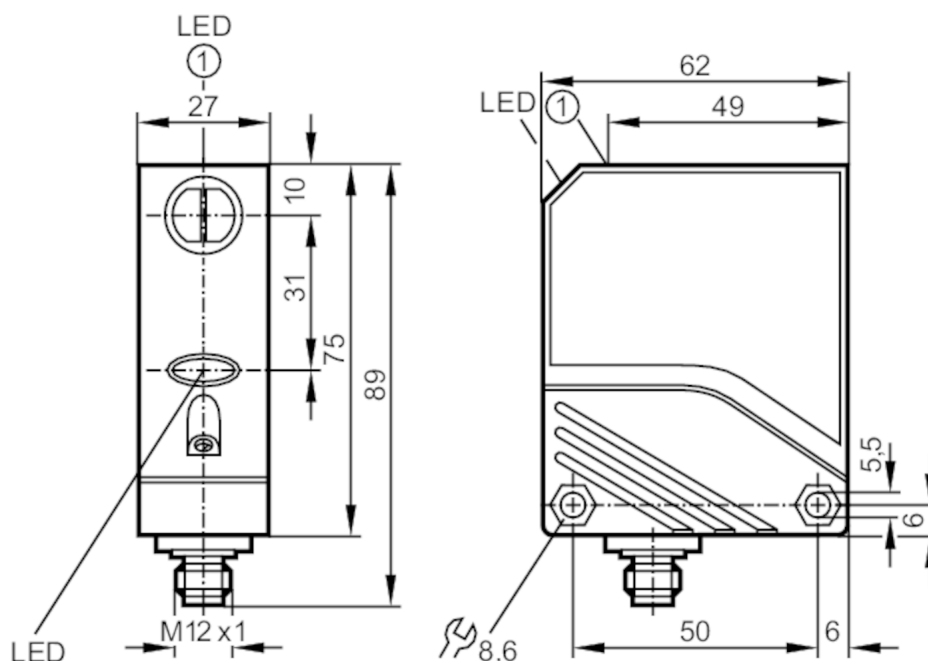

1 pushbutton

Product characteristics

Type of light	red light
Housing	rectangular

Application

Special feature	Function check output
Function principle	Through-beam sensor

Electrical data

Operating voltage	[V]	10...30 DC
Current consumption	[mA]	< 30
Protection class		II
Reverse polarity protection		yes
Overvoltage protection		yes
Type of light		red light
Wave length	[nm]	675

Outputs

Electrical design		NPN
Output function		light-on/dark-on mode; (parameterisable)
Max. voltage drop switching output DC	[V]	2.5
Function check output		yes



Through-beam sensor receiver

OLELFNKG/US-100

Max. voltage drop of function check output	[V]	3.5
Max. current load for function check output	[mA]	10
Permanent current rating of switching output DC	[mA]	200
Switching frequency DC	[Hz]	500
Short-circuit protection		yes
Type of short-circuit protection		pulsed

Detection zone

Transmitter / receiver		receiver
Range	[m]	< 60
Range adjustable		yes
Diameter of the smallest detectable object	[mm]	3

Operating conditions

Ambient temperature	[°C]	-10...50
Protection		IP 67

Tests / approvals

EMC	EN 60947-5-2	
	EN 55011	class B

Mechanical data

Housing		rectangular
Dimensions	[mm]	75 x 27 x 62
Materials		PBT
Lens material		PMMA

Displays / operating elements

Display	switching status	1 x LED, yellow
	operation	1 x LED, green
	function	1 x LED, red

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Connector: 1 x M12; coding: A



Through-beam sensor receiver

OLELFNKG/US-100

Connection



2 Function check output

Diagrams and graphs

excess gain graph

