
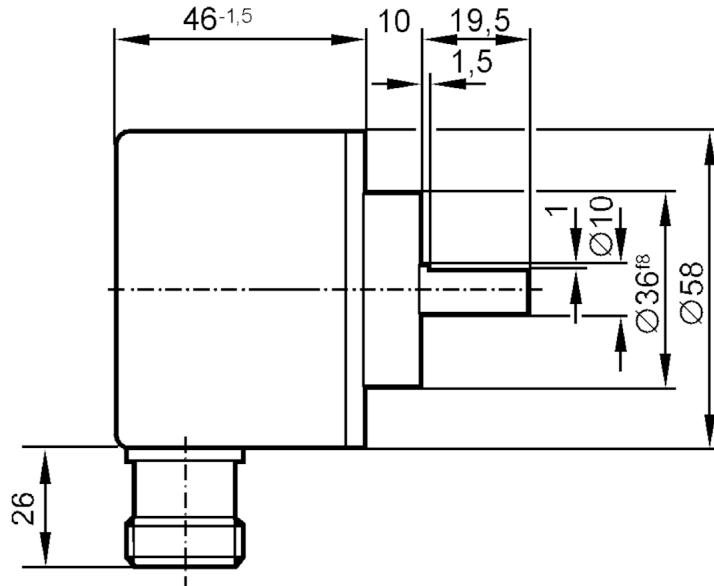


Incremental encoder with solid shaft

RV-0750-I24/S E

Article no longer available - archive entry

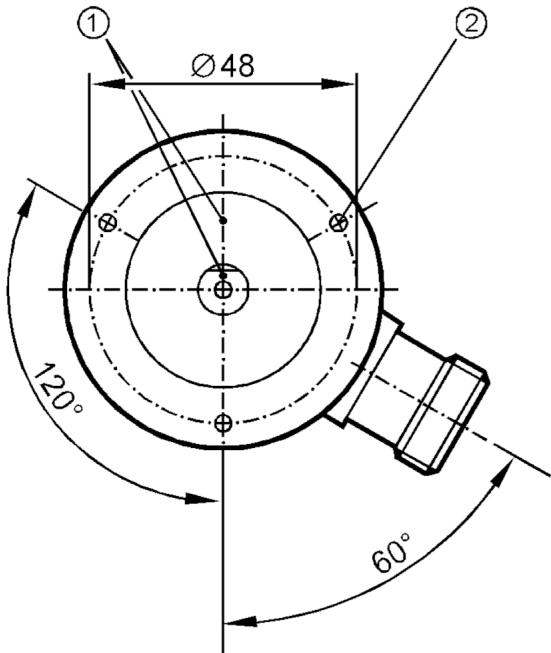

- 1 reference mark
2 M4 Depth 5 mm



Product characteristics

| | |
|---------------------|----------------|
| Resolution | 750 resolution |
| Shaft design | solid shaft |
| Shaft diameter [mm] | 10 |

Application

| | |
|--------------------|-------------|
| Function principle | incremental |
|--------------------|-------------|

Electrical data

| | |
|--------------------------|------------|
| Operating voltage [V] | 10...30 DC |
| Current consumption [mA] | 150 |

Outputs

| | |
|-----------------------------------|-----|
| Electrical design | TTL |
| Max. current load per output [mA] | 20 |
| Switching frequency [kHz] | 160 |
| Phase difference A and B [°] | 90 |

Measuring/setting range

| | |
|------------|----------------|
| Resolution | 750 resolution |
|------------|----------------|

Operating conditions

| | |
|--------------------------------|---|
| Ambient temperature [°C] | -30...85 |
| Max. relative air humidity [%] | 98 |
| Protection | IP 67; (on the housing: IP 67; on the shaft: IP 66) |

Incremental encoder with solid shaft

RV-0750-I24/S E

Tests / approvals


| | |
|----------------------|---------------------|
| Shock resistance | 100 g (6 ms) |
| Vibration resistance | 15 g (55...2000 Hz) |

Mechanical data

| | | |
|---|---------|-----------------------------|
| Weight | [g] | 400 |
| Dimensions | [mm] | $\varnothing 58 / L = 75.5$ |
| Materials | | aluminium |
| Max. revolution, mechanical | [U/min] | 12000 |
| Max. starting torque | [Nm] | 1 |
| Reference temperature torque | [°C] | 20 |
| Shaft design | | solid shaft |
| Shaft diameter | [mm] | 10 |
| Shaft material | | steel (1.4104) |
| Max. shaft load axial (at the shaft end) | [N] | 10 |
| Max. shaft load radial (at the shaft end) | [N] | 20 |

Electrical connection


Connector: 1 x M23 (ifm 1001.4), radial



| | |
|----|------------------|
| 1 | B inverted |
| 2 | L+ sensor |
| 3 | 0 index |
| 4 | 0 index inverted |
| 5 | A |
| 6 | A inverted |
| 7 | failure inverted |
| 8 | B |
| 9 | n.c. |
| 10 | 0V |
| 11 | 0V sensor |
| 12 | L+ |

Diagrams and graphs

Pulse diagram



direction of rotation clockwise (looking at the shaft)