

AC007S




Safe AS-Interface universal module

Universal module 2SI 2xOSSD

Article no longer available - archive entry

Alternative articles: AC508S
When selecting an alternative article and accessories please note that technical data may differ!

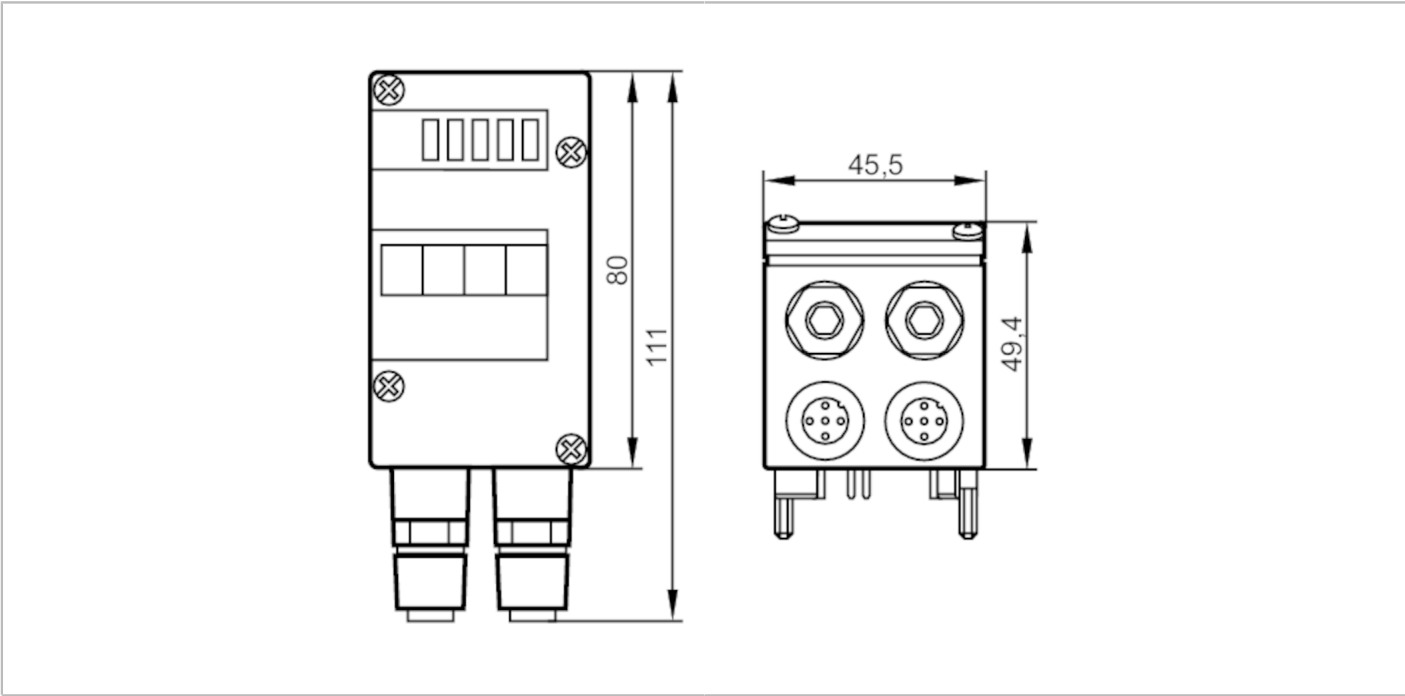

Application		
Application	connection of electro-sensitive protective equipment (ESPE) type 4 according to EN 61496-1	
Electrical data		
Operating voltage	[V]	26.5...31.6 DC
Current consumption	[mA]	< 35
Protection class		III
Inputs		
Input circuit of digital inputs		PNP
Sensor supply of the inputs		ext. 24 V DC PELV
Voltage supply	[V]	20.4...28.8
Max. total current rating of inputs	[mA]	2000
Input current High	[mA]	6...10
Input current low	[mA]	0...2
Switching level high	[V]	> 11
Switching level low	[V]	< 5
Digital inputs protected against short circuits		yes
Overload protection digital inputs		yes



Safe AS-Interface universal module

Universal module 2SI 2xOSSD

Outputs		
Electrical design	AS-i	
Operating conditions		
Ambient temperature	[°C]	-25...55
Storage temperature	[°C]	-25...85
Max. relative air humidity	[%]	95
Protection	IP 67	
Tests / approvals		
EMC	EN 50295	
	IEC 62026-2	
Safety classification		
Complies with the requirements	ISO 13849-1: 2015 Category 4, PL e	
	IEC 61508 SIL 3	
Mission time TM	[h]	87600
Mission time TM (additional indication)	10 years	
	calculation basis	
	Ambient temperature: 40 °C	
PFH	[1/h]	1,54E-09
Max. internal capacitance	[nF]	10
AS-i classification		
AS-i version	2.11; 3.0	
Extended addressing mode	no	
AS-i master profile	M3; M4	
AS-i profile	S-0.B.E	
AS-i I/O configuration	[hex]	0
AS-i ID code	[hex]	B.E
AS-i certificate	80002	
Mechanical data		
Weight	[g]	280
Material	PA 6	
Displays / operating elements		
Display	Power	LED, green
	errors	LED, red
	Function	LED, yellow
Remarks		
Pack quantity	1 pcs.	




Safe AS-Interface universal module

Universal module 2SI 2xOSSD

Electrical connection - receiver


Connector: M12; coding: A



1	Socket 3 receiver
2	supply + 24 V DC
3	OSSD2
4	supply 0 V
5	OSSD1
5	FE

Electrical connection - transmitter

Connector: M12; coding: A



1	Socket 4 transmitter
2	supply +24 V DC
3	not used
4	supply 0 V
5	supply +24 V DC Test
5	FE