


DV1330



3-segment signal light

LED-Tower-3/Std/Buzzer

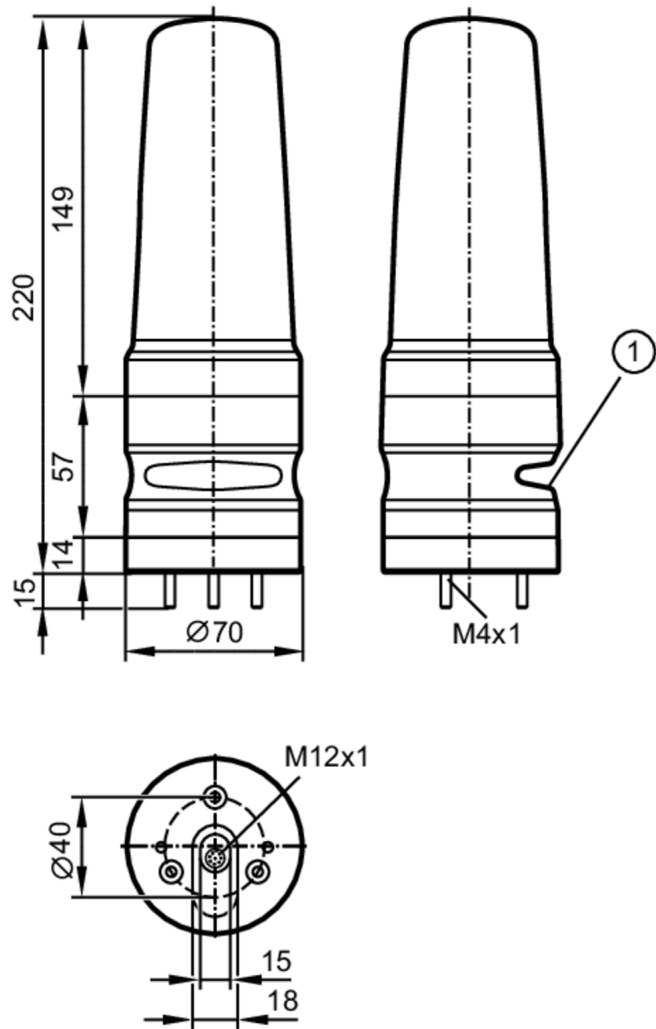

1 buzzer



Application	
Application	signaling machine conditions
Electrical data	
Operating voltage [V]	18...30 DC; (to SELV/PELV)
Nominal voltage DC [V]	24
Current consumption [mA]	< 200
Inputs / outputs	
Number of inputs and outputs	Number of digital inputs: 4
Inputs	
Number of digital inputs	4
Input current High [mA]	6
Interfaces	
Communication interface	IO-Link
Transmission type	COM2 (38,4 kBaud)
IO-Link revision	1.1

DV1330



3-segment signal light

LED-Tower-3/Std/Buzzer

SDCI standard	IEC 61131-9	
SIO mode	yes	
Required master port class	A	
Min. process cycle time [ms]	3.2	
Supported DeviceIDs	Type of operation	DeviceID
	default	1466

Operating conditions		
Ambient temperature [°C]	-25...50	
Storage temperature [°C]	-40...75	
Max. relative air humidity [%]	90	
Air pressure [kPa]	< 106	
Max. height above sea level [m]	2000	
Protection	IP 54	

Tests / approvals		
UL approval	voltage supply	Class 2

Mechanical data		
Weight [g]	427.3	
Dimensions [mm]	Ø 70 / L = 220	
Material	housing: ABS; lens: PC	


Displays / operating elements		
Display	status	1 x LED, green
	LED segment	3 x 4 LED
Acoustic signal	buzzer	
Max. sound pressure [dB]	85	

Accessories		
Accessories (optional)	mounting base, E89060	
	wall bracket, E89061	
	Mounting adapter, E89063	
	bracket with lateral cable entry, E89064	
	mounting tube, E89065	
	mounting tube, E89066	
	mounting tube, E89067	

Remarks		
Remarks	Further information is available in the manual.	
Pack quantity	1 pcs.	

Electrical connection - plug

Connector: M12; coding: A



DV1330



3-segment signal light

LED-Tower-3/Std/Buzzer

Connection	
1	n.c.
2	buzzer
3	Digital input LED segment 3
4	Digital input LED segment 2
5	voltage supply
6	Digital input LED segment 1
7	n.c.
8	IO-Link (C/Q)