


E80391



RFID antenna adapter to increase the ranges

ANT-AMP/136x76/KQ

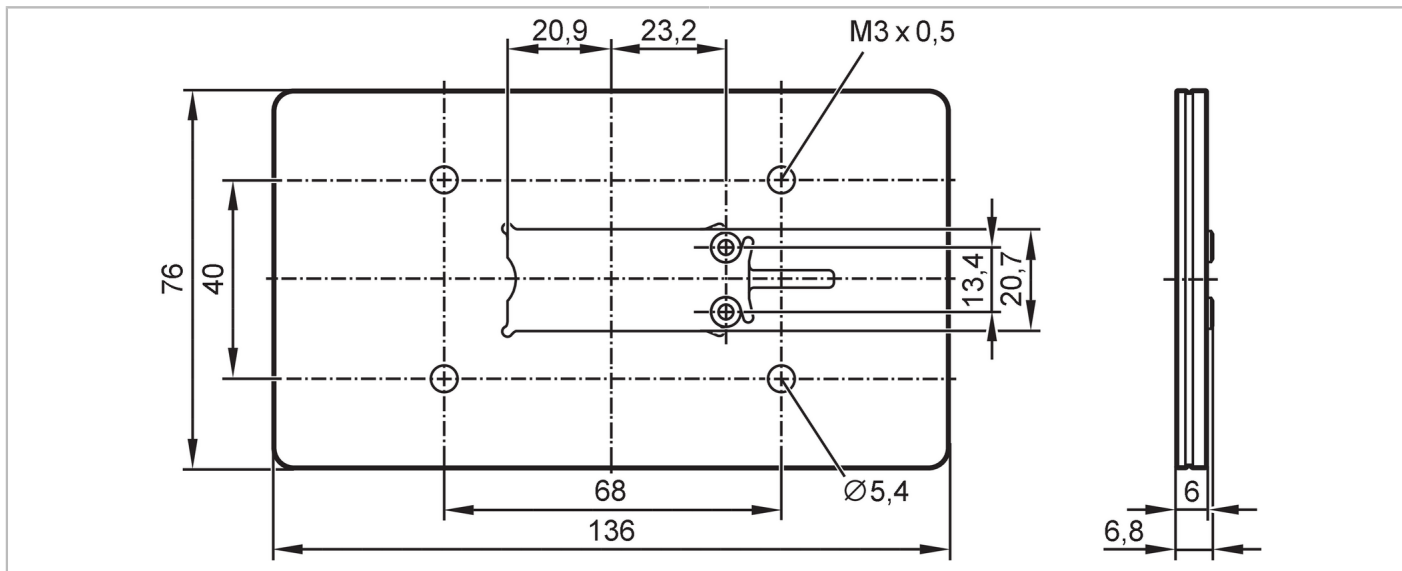

Electrical data

Operating frequency	[MHz]	13,56
---------------------	-------	-------

Operating conditions

Ambient temperature	[°C]	-20...60
Storage temperature	[°C]	-20...60

Tests / approvals

MTTF	[years]	25944
------	---------	-------

Mechanical data

Weight	[g]	110
Material		PVC
Tightening torque	[Nm]	0.5

Remarks

Pack quantity		1 pcs.
---------------	--	--------

Other data

Tag E80371 (30 mm)

Antenna	Range without metal			
ANT515 / ANT516 + E80391	40 mm			

Tag E80384 (50 mm)

Antenna	Range without metal			
ANT515 / ANT516 + E80391	70 mm			

E80391



RFID antenna adapter to increase the ranges

ANT-AMP/136x76/KQ

Tag E80320 (ISO card)

Antenna	Range without metal			
ANT515 / ANT516 + E80391	80 mm			