





Prewired jumper with contact housing

BasicCable/Display 5m

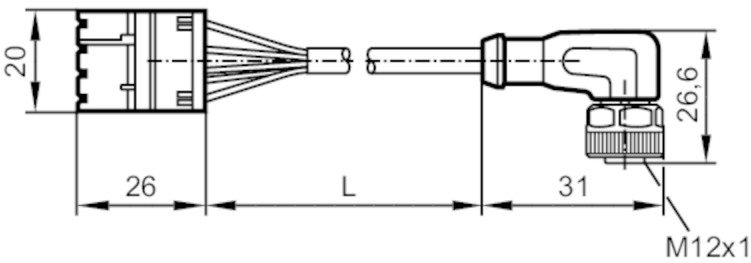

Application	
Design	wired, for BasicController and BasicDisplay, 1 x CR04xx, 1 x CR045x
Application	voltage supply; CAN bus
Operating conditions	
Ambient temperature	[°C] -40...85
Mechanical data	
Weight	[g] 194.4
Remarks	
Remarks	CAN bus terminating resistors (120 ohm) are integrated into the standard timer contact housing and the M12 connector
Pack quantity	1 pcs.
Electrical connection	
Cable: 5 m; 5 x 0.34 mm²	
Connection	

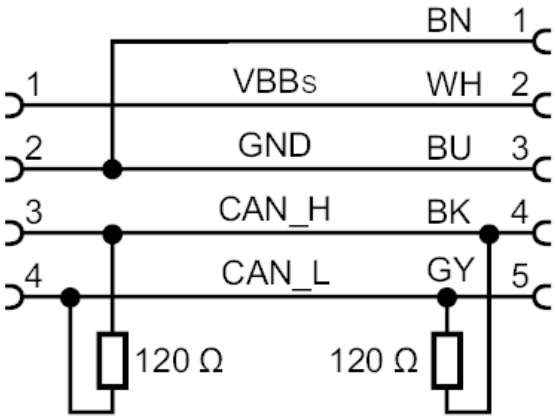

- Core colors :
- BK =

black
- BN =

brown
- BU =

blue
- GY =

grey
- WH =

white

Connector: 1 x M12