




Inductive tube sensor

I8-3020-BPKG/DY/AS-610-DPS

Article no longer available - archive entry

Alternative articles: I85008
When selecting an alternative article and accessories please note that technical data may differ!

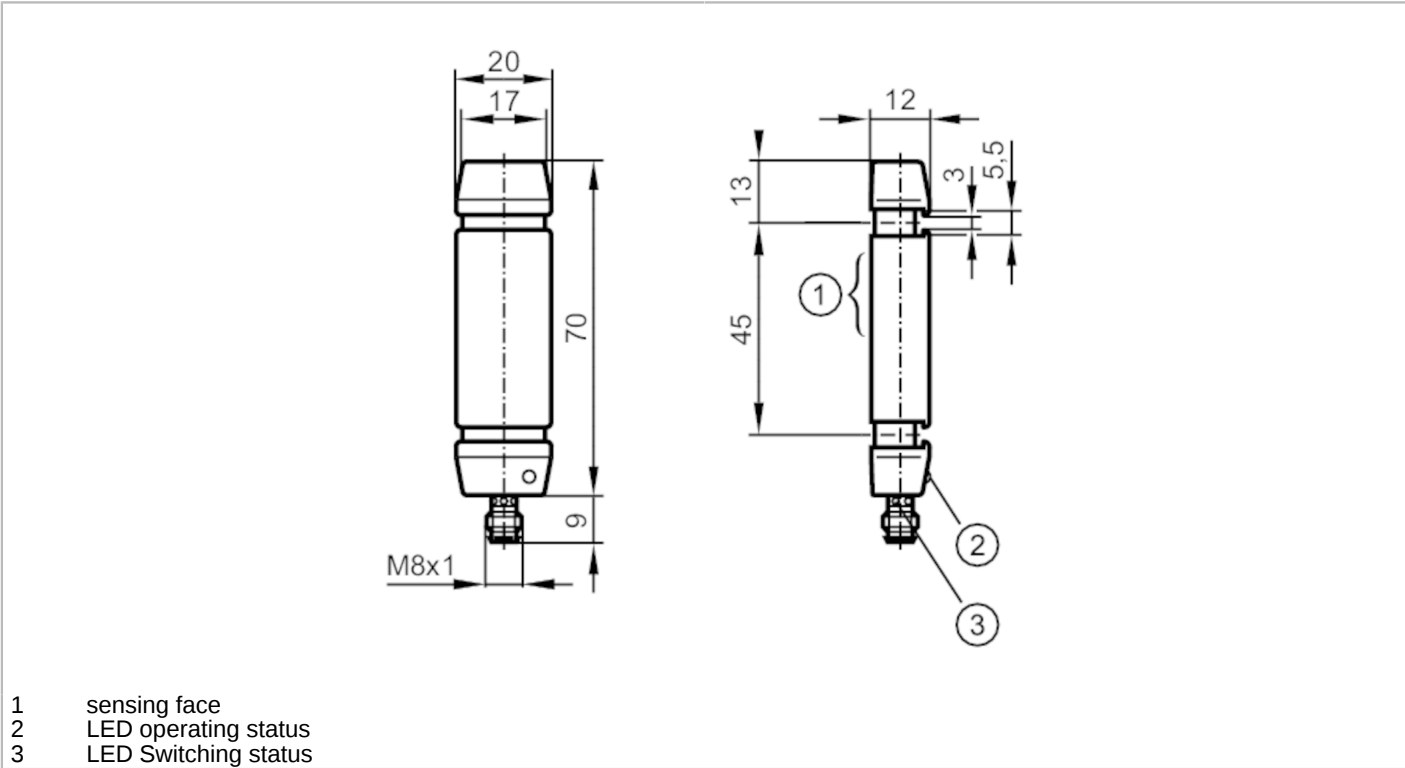

- 1 sensing face
- 2 LED operating status
- 3 LED Switching status



Product characteristics	
Electrical design	PNP
Output function	normally open
Sensing range [mm]	< 20
Housing	rectangular
Dimensions [mm]	70 x 20 x 12
Application	
Principle of operation	dynamic
Electrical data	
Operating voltage [V]	10...35 DC
Current consumption [mA]	< 25
Protection class	III
Reverse polarity protection	yes
Outputs	
Electrical design	PNP
Output function	normally open
Max. voltage drop switching output DC [V]	2

**Inductive tube sensor**

I8-3020-BPKG/DY/AS-610-DPS

Permanent current rating of switching output DC	[mA]	200
Short-circuit protection		yes
Overload protection		yes

Monitoring range

Sensing range	[mm]	< 20
Resolution of steel ball (diameter)	[mm]	1
Max. part speed	[m/s]	35

Reaction times

Pulse stretching	[ms]	100
Max. fall time	[ms]	100
Response time	[ms]	< 0.2

Operating conditions

Ambient temperature	[°C]	-25...70
Protection		IP 67

Mechanical data

Weight	[g]	30
Housing		rectangular
Dimensions	[mm]	70 x 20 x 12
Material		housing: PC

Displays / operating elements

Display	Switching status	1 x LED, yellow
	Power	1 x LED, green

Accessories

Items supplied	fixing straps: 2
----------------	------------------

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - plug

Connector: 1 x M8; coding: A



I85004



Inductive tube sensor

I8-3020-BPKG/DY/AS-610-DPS

Connection

