


# IB0026



## Inductive sensor

IB-2030-ABOA

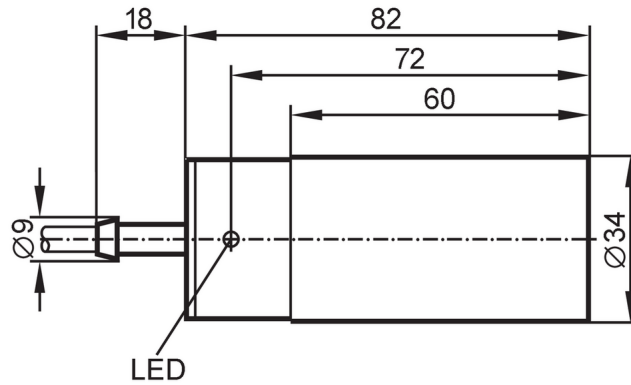

Product characteristics	
Output function	normally open
Sensing range [mm]	30
Housing	tubular
Dimensions [mm]	Ø 34 / L = 82

Application	
Application	Industrial applications

Electrical data	
Operating voltage [V]	20...250 AC/DC
Protection class	II
Reverse polarity protection	no

Outputs	
Output function	normally open
Max. voltage drop switching output DC [V]	6
Max. voltage drop switching output AC [V]	6.5
Minimum load current [mA]	5
Max. leakage current [mA]	2.5 (250 V AC) / 1.3 (110 V AC) / 0.8 (24 V DC)
Permanent current rating of switching output AC [mA]	250; (350 (...50 °C))
Permanent current rating of switching output DC [mA]	100
Short-time current rating of switching output [mA]	2200; (20 ms / 0,5 Hz)
Switching frequency AC [Hz]	25
Switching frequency DC [Hz]	50
Short-circuit proof	no
Overload protection	no

Monitoring range	
Sensing range [mm]	30
Real sensing range Sr [mm]	30 ± 10 %
Operating distance [mm]	0...24.3

# IB0026




## Inductive sensor

IB-2030-ABOA

Accuracy / deviations		
Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminum: 0.3 / copper: 0.2	
Hysteresis [% of Sr]	1...15	
Switch-point drift [% of Sr]	-10...10	
Operating conditions		
Ambient temperature [°C]	-25...80	
Protection	IP 67	
Tests / approvals		
EMC	EN 60947-5-2	
	EN 55011	class B
MTTF [years]	607	
Mechanical data		
Weight [g]	258.3	
Housing	tubular	
Mounting	non-flush mountable	
Dimensions [mm]	Ø 34 / L = 82	
Material	housing: PBT	
Displays / operating elements		
Display	Switching status	1 x LED, yellow
Electrical connection		
Required protection	miniature fuse to IEC60127-2 sheet 1; ≤ 2 A; fast acting	
Accessories		
Items supplied	Mounting clamp: 1	
Remarks		
Remarks	Recommendation: check the unit for reliable function after a short circuit.	
Pack quantity	1 pcs.	

Electrical connection	
Cable: 2 m, PVC; 2 x 0.5 mm <sup>2</sup>	

### Connection

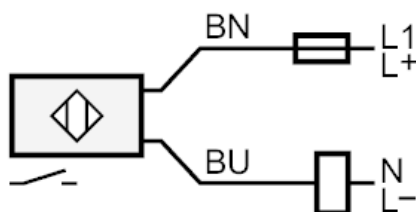

Note miniature fuse to IEC60127-2 sheet 1 ≤ 2 A fast acting  
Core colors :  
BN = brown  
BU = blue