




Inductive sensor

IDC2050BARKA/LS-300

Article no longer available - archive entry

Alternative articles: ID0038
When selecting an alternative article and accessories please note that technical data may differ!

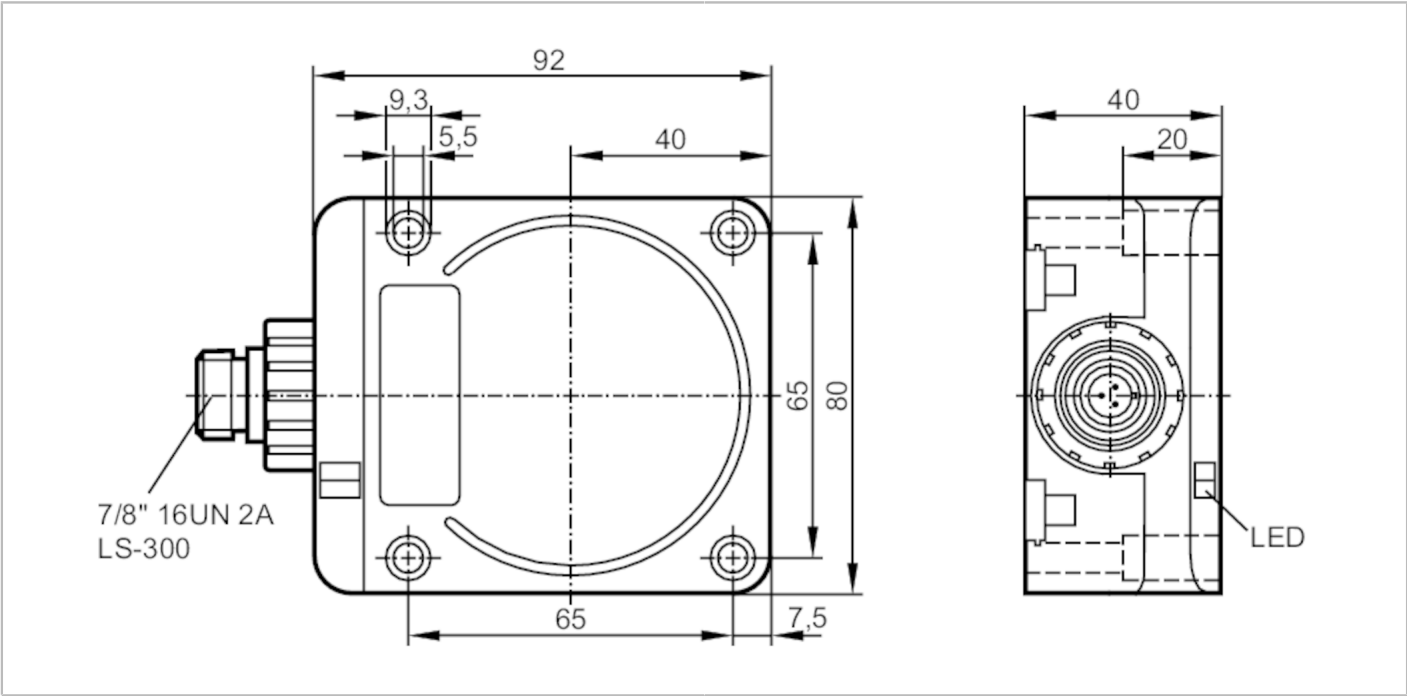

Product characteristics		
Output function		normally open
Sensing range	[mm]	50
Housing		rectangular
Dimensions	[mm]	92 x 80 x 40
Electrical data		
Frequency AC	[Hz]	47...63
Operating voltage	[V]	20...140 AC / 10...140 DC
Protection class		I
Reverse polarity protection		yes
Outputs		
Output function		normally open
Max. voltage drop switching output DC	[V]	6
Max. voltage drop switching output AC	[V]	6
Minimum load current	[mA]	5.5
Max. leakage current	[mA]	1.7 (140 V AC/DC)
Permanent current rating of switching output AC	[mA]	450
Permanent current rating of switching output DC	[mA]	450



Inductive sensor

IDC2050BARKA/LS-300

Short-time current rating of switching output	[mA]	2200; (20 ms / 0,5 Hz)
Switching frequency AC	[Hz]	25
Switching frequency DC	[Hz]	25
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Overload protection		yes

Monitoring range

Sensing range	[mm]	50
Operating distance	[mm]	0...40.5; (mounted flush with mild steel (ST37))

Accuracy / deviations

Correction factor		steel: 1 / stainless steel: 0.85 / brass: 0.48 / aluminum: 0.46 / copper: 0.38
Hysteresis	[% of Sr]	3...20
Switch-point drift	[% of Sr]	-15...15

Operating conditions

Ambient temperature	[°C]	-25...70
Protection		IP 67

Tests / approvals

EMC	EN 60947-5-2	
-----	--------------	--

Mechanical data

Weight	[g]	0.001
Housing		rectangular
Mounting		flush mountable
Type of mounting		with mounting bracket; (E10730)
Dimensions	[mm]	92 x 80 x 40
Material		PPE; diecast zinc; brass nickel-plated

Displays / operating elements

Display	Switching status	1 x LED, red
	Power	1 x LED, green
	short circuit	1 x LED, green/red alternately flashing

Remarks

Pack quantity	1 pcs.
---------------	--------

ID0041



Inductive sensor

IDC2050BARKA/LS-300

Electrical connection - plug

Connector: 1 x 7/8"; coding: A

