
## IF0013

#### Inductive sensor





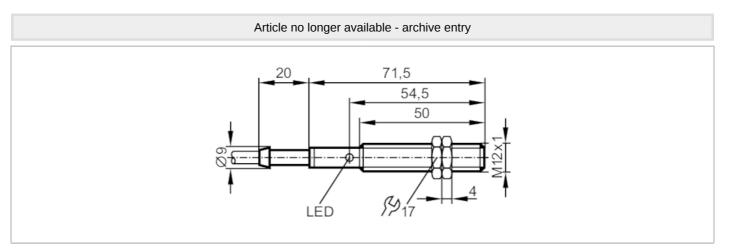

# CE

Product characteristics		
Output function		normally closed
Sensing range	[mm]	2
Housing		Threaded type
Dimensions	[mm]	M12 x 1 / L = 71.5
Electrical data		
Frequency AC	[Hz]	4763
Operating voltage	[V]	20250 AC
Protection class		II
Reverse polarity protection		no
Outputs		
Output function		normally closed
Max. voltage drop switching output AC	) [V]	8.5
Minimum load current	[mA]	8
Max. leakage current	[mA]	2
Permanent current rating of switching output AC	[mA]	200; (250 (50 °C))
Short-time current rating of switching output	[mA]	900; (20 ms / 0,5 Hz)
Switching frequency AC	[Hz]	25
Short-circuit proof		no
Overload protection		no
Monitoring range		
Sensing range	[mm]	2
Real sensing range Sr	[mm]	2 ± 10 %
Operating distance	[mm]	01.6
Accuracy / deviations		
Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminum: 0.3 / copper: 0.2
Hysteresis	[% of Sr]	115
Switch-point drift	[% of Sr]	-1010

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — EN-US — IF0013-00 — 13.01.2017 — 🚊

## IF0013


### Inductive sensor

IF-2002-BBOW/10m



Operating conditions					
Ambient temperature	[°C]	-2580			
Protection			IP 67		
Tests / approvals					
EMC		EN 60947-5-2			
MTTF	[years]		932		
Mechanical data					
Housing			Threaded type		
Mounting			flush mountable		
Dimensions	[mm]		M12 x 1 / L = 71.5		
Thread designation			M12 x 1		
Material			PBT		
Displays / operating elements					
Display		Switching status	1 x LED, yellow		
Electrical connection					
Required protection		miniature fuse to IEC60127-2 sheet 1; $\leq$ 2 A; fast acting			
Accessories					
Items supplied			lock nuts: 2		
Remarks					
Remarks		Recommenda	ion: check the unit for reliable function after a short circuit.		
Pack quantity			1 pcs.		
Electrical connection					
Cable: 10 m, PVC; 2 x 0.5	mm²				

Connection



	Note miniature fuse to IEC60127-2 sheet $1 \le 2$ A fast acting
	Core colors :
BN =	brown
BU =	blue