


Inductive sensor

IFC-04-ARKG/US-L-L für Ventile

Article no longer available - archive entry

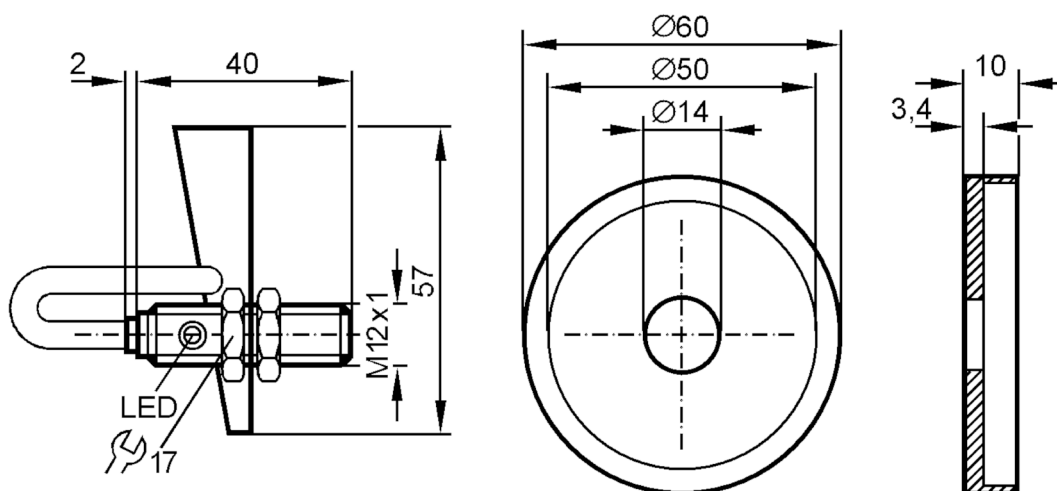

Product characteristics

Electrical design	PNP/NPN
Output function	normally open
Sensing range [mm]	4
Housing	Threaded type
Dimensions [mm]	M12 x 1

Application

System	gold-plated contacts
Installation	for valves; (76...101,6 (NW 80...100))

Electrical data

Operating voltage [V]	10...36 DC
Protection class	II
Reverse polarity protection	yes

Outputs

Electrical design	PNP/NPN
Output function	normally open
Max. voltage drop switching output DC [V]	4.6
Minimum load current [mA]	4
Max. leakage current [mA]	0.6
Permanent current rating of switching output DC [mA]	150
Switching frequency DC [Hz]	1500

IF7009



Inductive sensor

IFC-04-ARKG/US-L-L für Ventile

Short-circuit protection	yes
Type of short-circuit protection	yes (non-latching)
Overload protection	yes

Monitoring range

Sensing range	[mm]	4
Real sensing range Sr	[mm]	4 ± 10 %
Operating distance	[mm]	0...3.25

Accuracy / deviations

Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminum: 0.3 / copper: 0.2	
Hysteresis	[% of Sr]	1...15
Switch-point drift	[% of Sr]	-10...10

Operating conditions

Ambient temperature	[°C]	-25...80
Protection		IP 67

Tests / approvals

EMC	EN 60947-5-2	
	EN 55011	class B

Mechanical data

Housing	Threaded type	
Mounting	non-flush mountable	
Dimensions	[mm]	M12 x 1
Thread designation		M12 x 1
Material	PBT; Target: stainless steel (1.4301 / 304)	

Displays / operating elements

Display	Switching status	1 x LED, yellow
---------	------------------	-----------------

Accessories

Items supplied	lock nuts: 2	
	Target	

Remarks

Remarks	Note:	
	The sensors are adjusted with the enclosed target flag.	
	If an older type of target flag is used, there is a risk of mechanical damage to the sensor if they are not adjusted properly.	
Pack quantity	1 pcs.	

Electrical connection - plug

Connector: 1 x M12; coding: A; Contacts: gold-plated



IF7009



Inductive sensor

IFC-04-ARKG/US-L-L für Ventile

Connection

