




Inductive sensor

IGA2008-FBOA/SL/TS-600-K

Article no longer available - archive entry

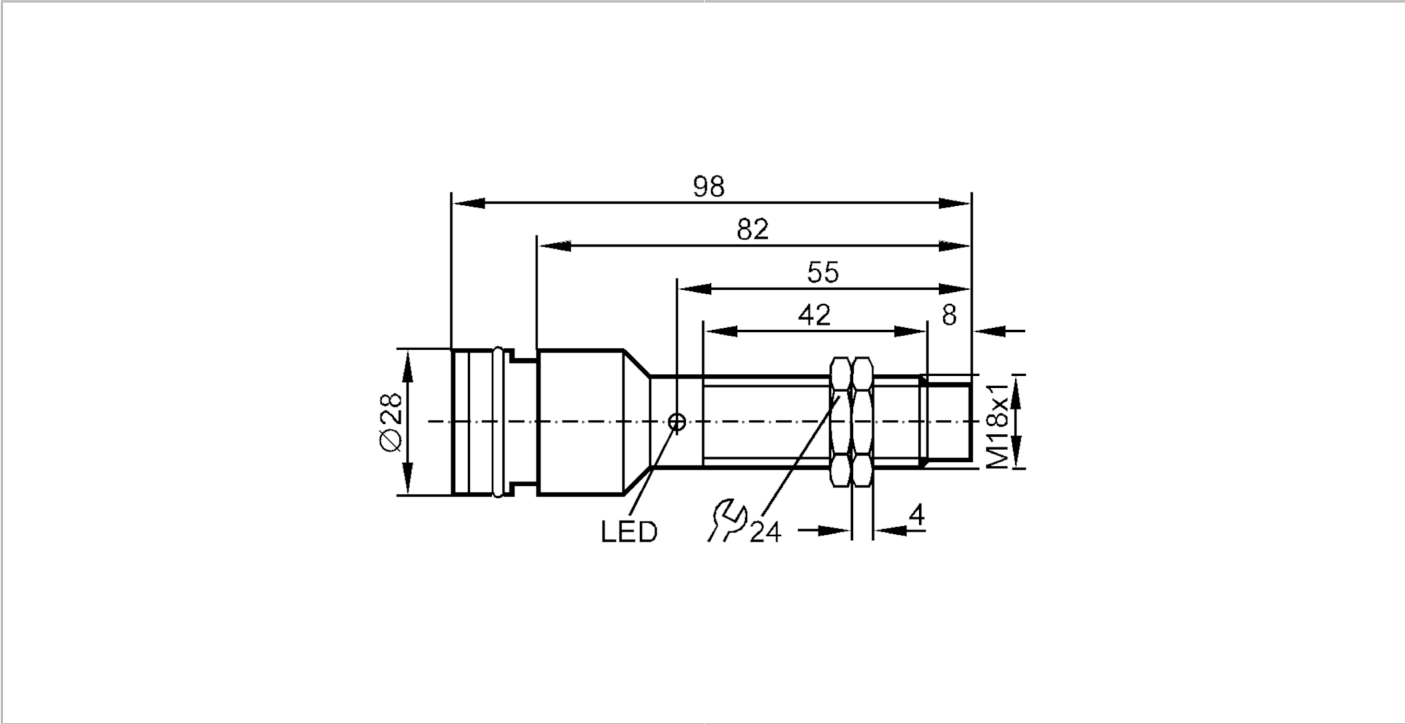

Product characteristics		
Output function		normally open / closed; (selectable)
Sensing range	[mm]	8
Housing		Threaded type
Dimensions	[mm]	M18 x 1
Electrical data		
Operating voltage	[V]	20...250 AC/DC
Reverse polarity protection		no
Outputs		
Output function		normally open / closed; (selectable)
Max. voltage drop switching output DC	[V]	6.5
Max. voltage drop switching output AC	[V]	6.5
Minimum load current	[mA]	5
Max. leakage current	[mA]	2.5 (250 V AC) / 1.3 (110 V AC) / 0.8 (24 V DC)
Permanent current rating of switching output AC	[mA]	250; (350 (...50 °C))
Permanent current rating of switching output DC	[mA]	100
Short-time current rating of switching output	[mA]	2200; (20 ms / 0,5 Hz)
Switching frequency AC	[Hz]	25
Switching frequency DC	[Hz]	100

**Inductive sensor**

IGA2008-FBOA/SL/TS-600-K

Short-circuit protection		no	
Overload protection		no	
Monitoring range			
Sensing range	[mm]	8	
Real sensing range Sr	[mm]	8 ± 10 %	
Operating distance	[mm]	0...6.5	
Accuracy / deviations			
Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminum: 0.4 / copper: 0.3	
Hysteresis	[% of Sr]	1...15	
Switch-point drift	[% of Sr]	-10...10	
Operating conditions			
Ambient temperature	[°C]	-25...80	
Protection		IP 65	
Tests / approvals			
EMC		EN 60947-5-2	
		EN 55011	class B
Mechanical data			
Housing		Threaded type	
Mounting		non-flush mountable	
Dimensions	[mm]	M18 x 1	
Thread designation		M18 x 1	
Material		PES; brass nickel-plated	
Displays / operating elements			
Display		Switching status	1 x LED, yellow
Accessories			
Items supplied		lock nuts: 2	
Remarks			
Remarks		Note:	
		Reversing the polarity of the connector can lead to the destruction of the unit.	
Pack quantity		1 pcs.	

IG0275



Inductive sensor

IGA2008-FBOA/SL/TS-600-K

Electrical connection - plug

Connector: 1 x Ø 28 mm; coding: A

