




Inductive sensor

IGB2008BAROG/UP/Sonderstecker

Article no longer available - archive entry

Alternative articles: IG5820
When selecting an alternative article and accessories please note that technical data may differ!

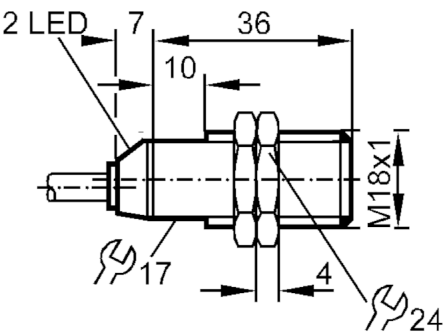

Product characteristics		
Electrical design		PNP/NPN
Output function		normally open
Sensing range	[mm]	8
Housing		Threaded type
Dimensions	[mm]	M18 x 1
Application		
System		Increased sensing range
Electrical data		
Operating voltage	[V]	10...36 DC
Reverse polarity protection		no
Outputs		
Electrical design		PNP/NPN
Output function		normally open
Max. voltage drop switching output DC	[V]	5
Minimum load current	[mA]	5
Max. leakage current	[mA]	1
Permanent current rating of switching output DC	[mA]	100

IG5818



Inductive sensor

IGB2008BAROG/UP/Sonderstecker

Switching frequency DC	[Hz]	100
Short-circuit protection		no
Overload protection		no
Monitoring range		
Sensing range	[mm]	8
Increased sensing range		yes
Accuracy / deviations		
Correction factor		steel: 1 / stainless steel: 0.7 / aluminum: 0.4
Hysteresis	[% of Sr]	3...15
Switch-point drift	[% of Sr]	-10...10
Operating conditions		
Ambient temperature	[°C]	-25...70
Protection		IP 67
Tests / approvals		
EMC	EN 60947-5-2	
	EN 55011	class B
Mechanical data		
Weight	[g]	101
Housing		Threaded type
Mounting		flush mountable
Dimensions	[mm]	M18 x 1
Thread designation		M18 x 1
Material		brass nickel-plated; PC
Displays / operating elements		
Display	Switching status	1 x LED, red
	Switching status	1 x LED, green
Accessories		
Items supplied		lock nuts: 2
Remarks		
Pack quantity		1 pcs.

IG5818




Inductive sensor

IGB2008BAROG/UP/Sonderstecker

Electrical connection

Cable: 0.3 m, PUR; 2 x 0.5 mm²

Connection

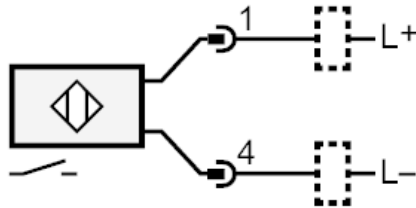

Connector: 1 x M12