




## Inductive sensor

IGA2005SFROG/ 6m

Article no longer available - archive entry

Alternative articles: IG5179

When selecting an alternative article and accessories please note that technical data may differ!

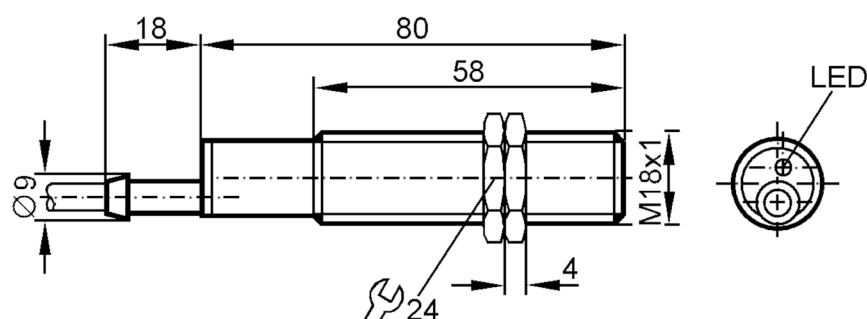

### Product characteristics

Electrical design	PNP; (Self-monitoring system)
Output function	normally open / closed; (selectable)
Sensing range [mm]	5
Housing	Threaded type
Dimensions [mm]	M18 x 1

### Electrical data

Connection at circuit amplifier	yes
Switching amplifiers	Connection to F400 control monitor or as 2-wire DC DNP
Operating voltage [V]	10...36 DC
Reverse polarity protection	no

### Outputs

Electrical design	PNP; (Self-monitoring system)
Output function	normally open / closed; (selectable)
Max. voltage drop switching output DC [V]	6.5
Minimum load current [mA]	5
Max. leakage current [mA]	1.5
Permanent current rating of switching output DC [mA]	100
Switching frequency DC [Hz]	80

# IG5107



## Inductive sensor

IGA2005SFROG/ 6m

Short-circuit protection		no	
Overload protection		no	
Monitoring range			
Sensing range	[mm]	5	
Real sensing range Sr	[mm]	5 ± 10 %	
Operating distance	[mm]	0...4.05	
Accuracy / deviations			
Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminum: 0.3 / copper: 0.2	
Hysteresis	[% of Sr]	1...15	
Switch-point drift	[% of Sr]	-10...10	
Operating conditions			
Ambient temperature	[°C]	-25...80	
Protection		IP 67	
Tests / approvals			
EMC	IEC 801-2		level 4
	IEC 801-3		level 3
	IEC 801-4		level 4
	IEC 801-5		level 2
Mechanical data			
Housing		Threaded type	
Mounting		flush mountable	
Dimensions	[mm]	M18 x 1	
Thread designation		M18 x 1	
Material		brass nickel-plated; PBT	
Displays / operating elements			
Display		Switching status	1 x LED, yellow
Accessories			
Items supplied		lock nuts: 2	
Remarks			
Pack quantity		1 pcs.	






## Inductive sensor

IGA2005SFROG/ 6m

### Electrical connection

Cable: 6 m, PVC; 3 x 0.5 mm<sup>2</sup>

### Connection

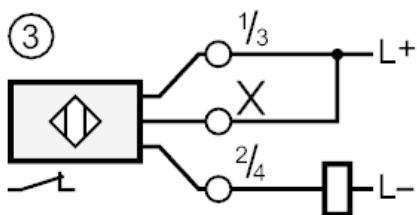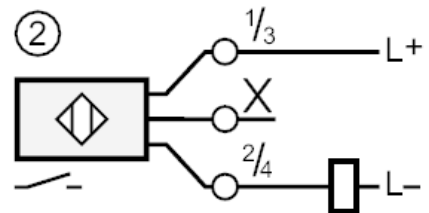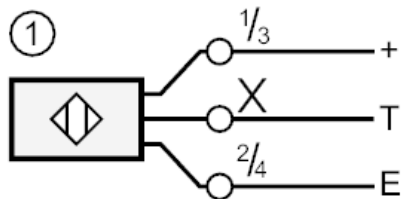

- 1 = connection to F400  
 2 = Connection 2-wire DC  
 3 = Connection 2-wire DC  
 Core colors :  
 BK = black  
 BN = brown  
 BU = blue