



Inductive sensor

IN-2002-ABOA/F/6M

Article no longer available - archive entry

Alternative articles: IN0074
When selecting an alternative article and accessories please note that technical data may differ!

1 mounting hole
2 threaded bush M3 Depth 5.8 mm



Product characteristics		
Output function		normally open
Sensing range	[mm]	2
Housing		rectangular
Dimensions	[mm]	40 x 12 x 26
Electrical data		
Operating voltage	[V]	20...250 AC/DC
Protection class		II
Reverse polarity protection		no
Outputs		
Output function		normally open
Max. voltage drop switching output DC	[V]	6
Max. voltage drop switching output AC	[V]	6.7
Minimum load current	[mA]	4
Max. leakage current	[mA]	2.0 (250 V AC) / 1.3 (110 V AC) / 0.8 (24 V DC)
Permanent current rating of switching output AC	[mA]	250; (350 (...50 °C))
Permanent current rating of switching output DC	[mA]	100
Short-time current rating of switching output	[mA]	2100; (50 ms / 1 Hz)
Switching frequency AC	[Hz]	25
Switching frequency DC	[Hz]	50



Inductive sensor

IN-2002-ABOA/F/6M

Short-circuit protection		no
Overload protection		no
Monitoring range		
Sensing range	[mm]	2
Real sensing range Sr	[mm]	2 ± 10 %
Operating distance	[mm]	0...1.6
Accuracy / deviations		
Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminum: 0.3 / copper: 0.2	
Hysteresis	[% of Sr]	1...15
Switch-point drift	[% of Sr]	-10...10
Operating conditions		
Ambient temperature	[°C]	-20...80
Protection	IP 67	
Tests / approvals		
EMC	EN 60947-5-2	
	EN 55011	class B
Mechanical data		
Housing	rectangular	
Mounting	flush mountable	
Dimensions	[mm]	40 x 12 x 26
Material	PBT	
Mounting hole		
Tightening torque	[Nm]	< 0.5
Threaded bush		
Tightening torque	[Nm]	< 1.2; (when brass insert in contact with counterpart)
Displays / operating elements		
Display	Switching status	1 x LED, yellow
Remarks		
Pack quantity	1 pcs.	

IN0095




Inductive sensor

IN-2002-ABOA/F/6M

Electrical connection

Cable: 6 m, PVC; 2 x 0.5 mm²

Connection

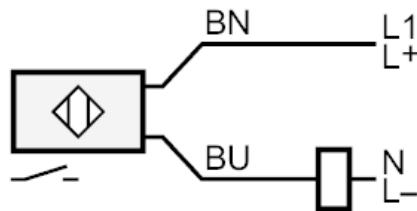

BN = Core colors :
brown
BU = blue