# IN5123

## **Inductive sensor**


IN-3002-BPKG/10M



## Article no longer available - archive entry

#### Alternative articles: IN5121

When selecting an alternative article and accessories please note that technical data may differ!

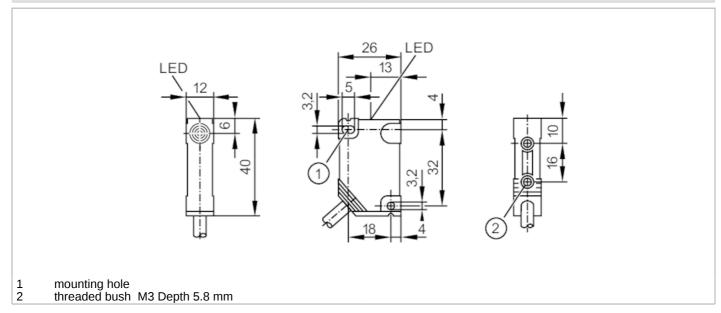

# $\epsilon$

Product characteristics		
Electrical design		PNP
Output function		normally open
Sensing range	[mm]	2
Housing		rectangular
Dimensions	[mm]	40 x 12 x 26
Electrical data		
Operating voltage	[V]	1036 DC
Current consumption	[mA]	15; (24 V)
Protection class		II
Reverse polarity protection		yes
Outputs		
Electrical design		PNP
Output function		normally open
Max. voltage drop switching	DΛ	
output DC	[V]	2.5
	[mA]	2.5
output DC  Permanent current rating of		
output DC Permanent current rating of switching output DC	[mA]	250
output DC  Permanent current rating of switching output DC  Switching frequency DC	[mA]	250 1400

# **IN5123**

## **Inductive sensor**





Monitoring range					
Sensing range	[mm]		2		
Real sensing range Sr	[mm]	2 ± 10 %			
Operating distance	[mm]	01.6			
Accuracy / deviations					
Correction factor		steel: 1 / stainless ste	el: 0.7 / brass: 0.4 / aluminum: 0.3 / copper: 0.2		
Hysteresis	[% of Sr]		115		
Switch-point drift	[% of Sr]		-1010		
Operating conditions					
Ambient temperature	[°C]		-2580		
Protection			IP 67		
Tests / approvals					
EMC		EN 60947-5-2			
MTTF	[years]		2577		
Mechanical data					
Weight	[g]		0.463		
Housing			rectangular		
Mounting		flush mountable			
Dimensions	[mm]		40 x 12 x 26		
Material			PBT		
Mounting hole					
Tightening torque	[Nm]		< 0.5		
Threaded bush					
Tightening torque	[Nm]	< 1.2; (when	orass insert in contact with counterpart)		
Displays / operating ele	Displays / operating elements				
Display		Switching status	1 x LED, yellow		
Remarks					

# **IN5123**

## **Inductive sensor**


IN-3002-BPKG/10M



# Electrical connection

Cable: 10 m, PVC; 3 x 0.5 mm<sup>2</sup>

#### Connection



Core colors:

BN = brown
BU = blue
BK = black