




Article no longer available - archive entry

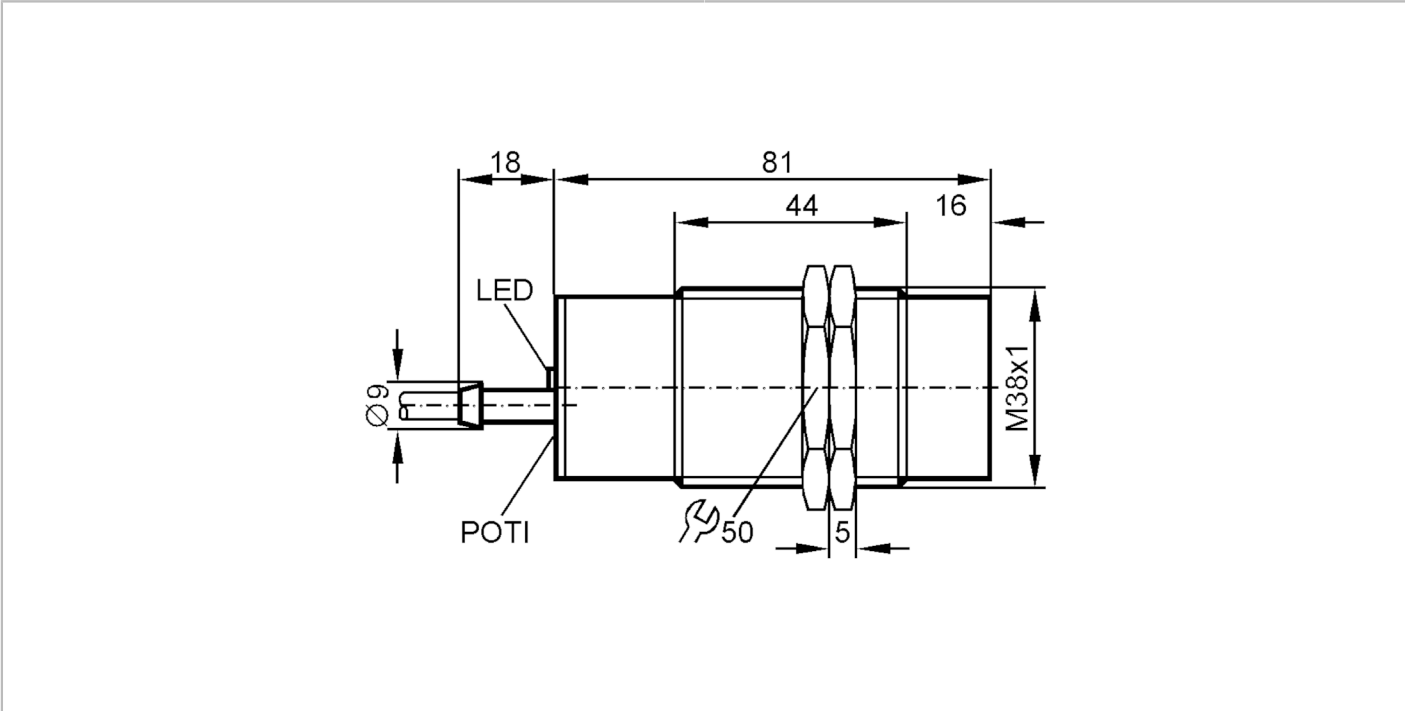

Product characteristics

Output function		normally open
Sensing range	[mm]	4...20
Housing		Threaded type
Dimensions	[mm]	M38 x 1.5

Electrical data

Operating voltage	[V]	20...250 AC/DC
Current consumption	[mA]	< 2
Protection class		II
Reverse polarity protection		no

Outputs

Output function		normally open
Max. voltage drop switching output DC	[V]	6
Max. voltage drop switching output AC	[V]	6
Minimum load current	[mA]	4
Permanent current rating of switching output AC	[mA]	250; (350 (...50 °C))
Permanent current rating of switching output DC	[mA]	100
Short-time current rating of switching output	[mA]	2200; (50ms / 0,5Hz)
Switching frequency AC	[Hz]	25

KK2001



Capacitive sensor

SKK-2020-ABOA

Switching frequency DC	[Hz]	40
Short-circuit proof		no
Overload protection		no
Monitoring range		
Sensing range	[mm]	4...20
Sensing range adjustable		yes
Factory setting sensing range	[mm]	20
Real sensing range Sr	[mm]	20 ± 10 %
Operating distance	[mm]	0...16.2
Accuracy / deviations		
Correction factor		glass: 0.4 / water: 1 / ceramics: 0.2 / PVC: 0.2
Hysteresis	[% of Sr]	1...15
Switch-point drift	[% of Sr]	-15...15
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 65
Tests / approvals		
EMC	EN 60947-5-2	
Mechanical data		
Housing		Threaded type
Mounting		non-flush mountable
Dimensions	[mm]	M38 x 1.5
Thread designation		M38 x 1.5
Material		brass white bronze coated; PBT
Displays / operating elements		
Display	Switching status	1 x LED, yellow
Electrical connection		
Required protection		miniature fuse to IEC60127-2 sheet 1; ≤ 2 A; fast acting
Accessories		
Items supplied		lock nuts: 2 screwdriver: 1
Remarks		
Remarks		Recommendation: check the unit for reliable function after a short circuit.
Pack quantity		1 pcs.

KK2001




Capacitive sensor

SKK-2020-ABOA

Electrical connection

Cable: 2 m, PVC; 3 x 0.5 mm²

Connection

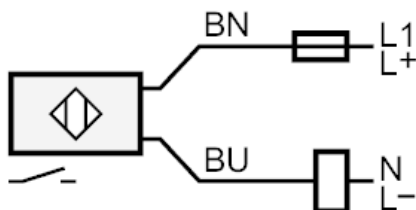

Note miniature fuse to IEC60127-2 sheet 1 $\leq$ 2 A fast acting

Core colors :

BN =

brown

BU =

blue