


O3D302



3D sensor

O3DIRDKG/E1/GM/S/60

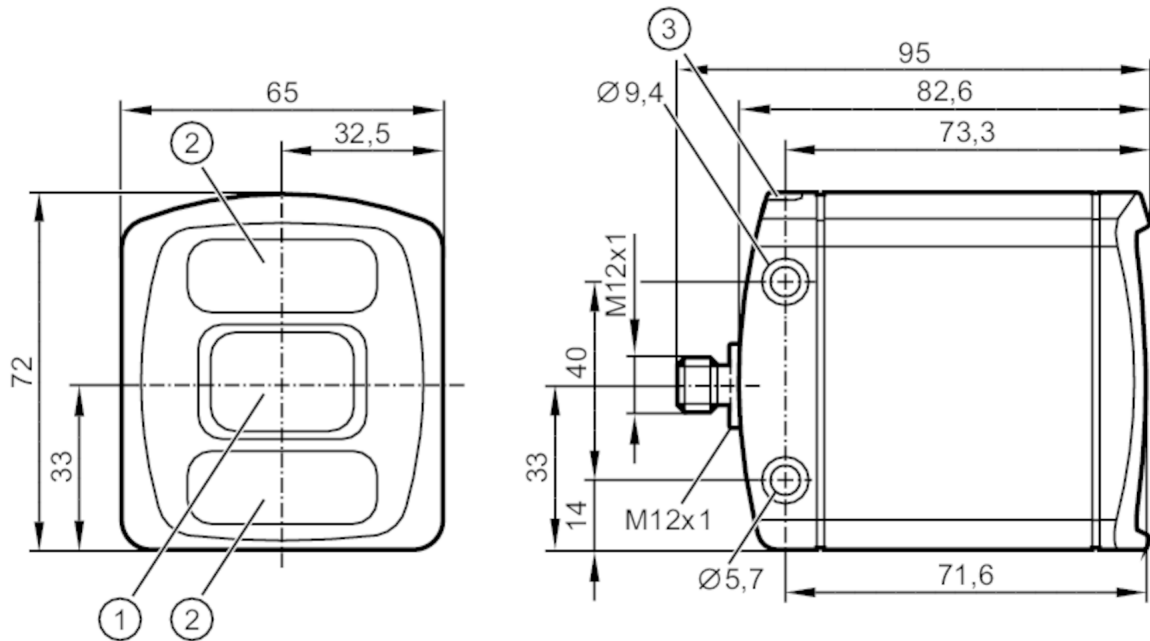

- 1 lens
- 2 illumination unit
- 3 LED 2-color yellow/green



Product characteristics

Image resolution 3D	[px]	176 x 132
Angle of aperture 3D	[°]	60 x 45; (nominal value without lens distortion correction)
Max. reading rate	[Hz]	25

Application

Application	Dimensioning of the object; Completeness monitoring; Level monitoring; distance monitoring; volume monitoring
-------------	---

Electrical data

Operating voltage	[V]	20.4...28.8 DC; (EN 61131-2)
Current consumption	[mA]	< 2400; (peak current pulsed; typical value: 420; maximum value: 1600)
Power consumption	[W]	10; (typical value)
Protection class		III
Image sensor		PMD 3D ToF-Chip
Integrated lighting		yes; (infrared: 850 nm invisible radiation LED)

Inputs / outputs

Number of inputs and outputs	Number of digital inputs: 2; Number of digital outputs: 3; Number of analog outputs: 1
------------------------------	--

Inputs

Trigger	24 V PNP/NPN (IEC 61131-2 Typ 3)
Number of digital inputs	2
Input circuit of digital inputs	24 V PNP/NPN; (configurable; IEC 61131-2 Typ 3)

**3D sensor**

O3DIRDKG/E1/GM/S/60

Outputs	
Total number of outputs	3
Number of digital outputs	3; (configurable)
Output function	24 V PNP/NPN; (EN 61131-2)
Max. voltage drop switching output DC [V]	1
Max. current load per output [mA]	100
Number of analog outputs	1
Analog current output [mA]	4...20
Max. load [Ω]	500
Analog voltage output [V]	0...10
Min. load resistance [Ω]	10000
Short-circuit protection	yes
Type of short-circuit protection	yes (non-latching)
Overload protection	yes
Monitoring range	
Operating distance [mm]	300...8000
Note on operating distance	object size: 200 x 200 mm
	reflectivity: 18 %
Image resolution 3D [px]	176 x 132
Angle of aperture 3D [°]	60 x 45; (nominal value without lens distortion correction)
Max. reading rate [Hz]	25
Measuring/setting range	
Measuring range [m]	< 30
Software / programming	
Parameter setting options	via PC with ifm Vision Assistant
Interfaces	
Communication interface	Ethernet
Ethernet	
Number of Ethernet interfaces	1
Transmission standard	10Base-T; 100Base-TX
Transmission rate	10; 100
Protocol	TCP/IP; PROFINET IO; EtherNet/IP
Factory settings	IP address: 192.168.0.69
	subnet mask: 255.255.255.0
	gateway IP address: 192.168.0.201
Operating conditions	
Ambient temperature [°C]	-10...50
Storage temperature [°C]	-40...85
Protection	IP 65; IP 67
Max. immunity to extraneous light [klx]	8; (with reduced measuring accuracy and repeatability: < 100)

O3D302



3D sensor

O3DIRDKG/E1/GM/S/60

Tests / approvals										
EMC	DIN EN 61000-6-4	radiation of interference / industrial environments								
	DIN EN 61000-6-2	noise immunity / industrial environments								
Shock resistance	DIN EN 60068-2-27	50 g / (11 ms) not repetitive								
	DIN EN 60068-2-27	40 g / (6 ms) repetitive								
Vibration resistance	DIN EN 60068-2-6	2 g / (10...150 Hz)								
	DIN EN 60068-2-64	2.3 g RMS / (10...500 Hz)								
Photobiological safety	exempt group; (DIN EN 62471)									
Electrical safety	DIN EN 61010-2-201	electrical supply only via PELV circuits								
MTTF	[years]	43.08								
Mechanical data										
Weight	[g]	772.35								
Dimensions	[mm]	72 x 65 x 82.6								
Material	housing: diecast aluminium; front lens: Gorilla Glass; Function display: PA									
Displays / operating elements										
Display	Function	2 x LED, green Ethernet Power								
	Switching status	2 x LED, yellow OUT 1 OUT 2								
Accessories										
Items supplied	Protective covers									
Remarks										
Pack quantity	1 pcs.									
Electrical connection - Ethernet										
Connector: 1 x M12; coding: D										
 <table><tr><td>1</td><td>TD +</td></tr><tr><td>2</td><td>RD +</td></tr><tr><td>3</td><td>TD -</td></tr><tr><td>4</td><td>RD -</td></tr></table>			1	TD +	2	RD +	3	TD -	4	RD -
1	TD +									
2	RD +									
3	TD -									
4	RD -									

O3D302




3D sensor

O3DIRDKG/E1/GM/S/60

Electrical connection - Process connection

Connector: 1 x M12; coding: A



1	U+
2	trigger input
3	GND
4	Switching output 1 (digital or analog)
5	Switching output 3 Ready
6	Switching output 2 (digital)
7	Switching input 1
8	Switching input 2

Other data

Field of view size with lens distortion correction

Measuring range / distance [m]	Length [m]	Width [m]		
0.50	0.37	0.50		
1.00	0.75	1.00		
2.00	1.50	2.00		
3.00	2.25	3.00		
4.00	3.00	4.00		
5.00	3.75	5.00		