


Fiber-optic amplifier

OBF-FPKG/T/TV=10MS

Article no longer available - archive entry

Alternative articles: OB5011

When selecting an alternative article and accessories please note that technical data may differ!

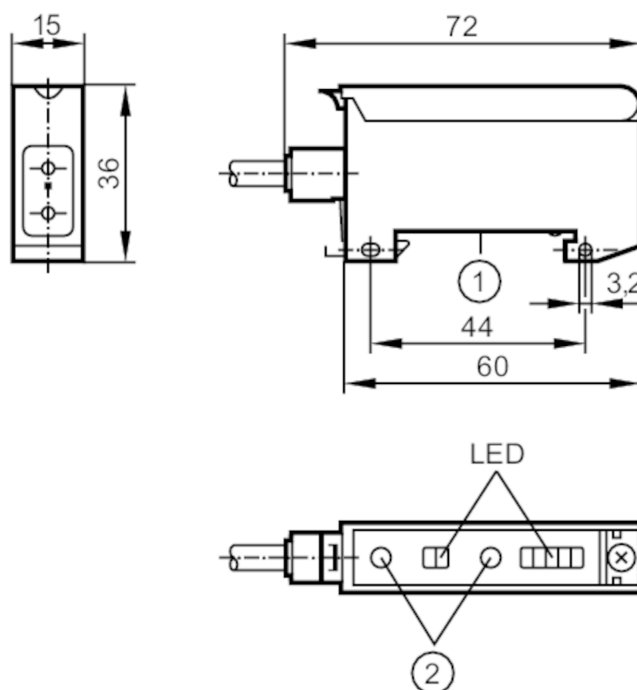

- 1 Mounting on DIN rail
2 setting pushbuttons

Product characteristics

Type of light	red light
Housing	rectangular

Application

System	Function check output
--------	-----------------------

Electrical data

Operating voltage [V]	10...36 DC
Current consumption [mA]	35; ((36 V))
Protection class	II
Reverse polarity protection	yes
Type of light	red light
Wave length [nm]	660

Outputs

Electrical design	PNP
Output function	light-on/dark-on mode; (configurable)
Max. voltage drop switching output DC [V]	2.5
Function check output	yes
Max. voltage drop of function check output [V]	3.5

OB5015



Fiber-optic amplifier

OBF-FPKG/T/TV=10MS

Max. current load for function check output	[mA]	10
Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	500
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Overload protection		yes
Time function	[s]	> 0.01; (fixed)
Monitoring range		
Range	[m]	0...1.2; (Through-beam sensor)
Range	[mm]	0...70; (Diffuse reflection sensor)
Range adjustable		yes
Operating conditions		
Ambient temperature	[°C]	-25...60
Protection		IP 65
Tests / approvals		
EMC	EN 60947-5-2	
	EN 55011	class B
Mechanical data		
Housing		rectangular
Dimensions	[mm]	36 x 15 x 60
Material		\$3SGLWE
Displays / operating elements		
Display	Switching status	1 x LED, yellow
	Power	1 x LED, green
	Unsafe zone	1 x LED, red
	Excess gain	4 x LED, green
Remarks		
Remarks	light-on mode corresponds to the NC output function for through-beam fibers	
	corresponds to the NO output function for diffuse-reflection fibers	
	dark-on mode corresponds to the NO output function for through-beam fibers	
	corresponds to the NC output function for diffuse-reflection fiber optics	
Pack quantity		1 pcs.

OB5015





Fiber-optic amplifier

OBF-FPKG/T/TV=10MS

Electrical connection

Cable: 2 m, PVC; 4 x 0.34 mm²

Connection

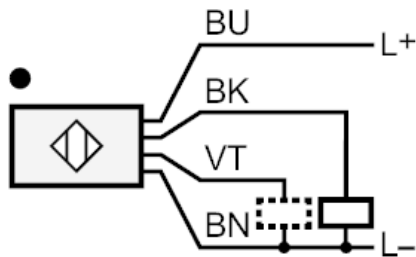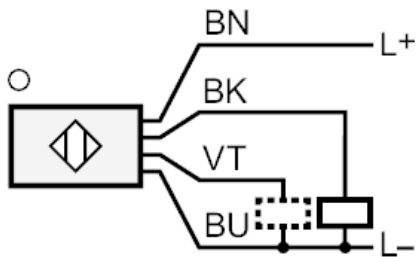

lilac Function check output
Core colors :
BK = black
BN = brown
BU = blue
VT = lilac